

## TECHNICAL INFORMATION

Ordering Code:


CB	-	<b>6</b>	-	<b>R</b>	-	<b>24</b>
		Gong size				Voltage
		4		-		6
		6		Gray		12
		8		R		24
		10				120
						220
						380




### Specifications

Cat. No.	Volts	Amps (Rated)	Amps (Actual)	dB
CB-4-6	6V DC	0.50	0.10	86
CB-4-12	12V DC	0.60	0.20	86
CB-4-24	24V DC	0.30	0.08	86
CB-4-120	120V AC	0.15	0.05	86
CB-4-240	240V AC	0.10	0.03	86
CB-6-6	6V DC	0.50	0.10	86
CB-6-12	12V DC	0.85	0.20	86
CB-6-24	24V DC	0.30	0.08	86
CB-6-120	120V AC	0.10	0.05	86
CB-6-240	240V AC	0.05	0.03	86
CB-8-6	6V DC	0.50	0.10	86
CB-8-12	12V DC	0.85	0.20	86
CB-8-24	24V DC	0.30	0.08	86
CB-8-120	120V AC	0.10	0.05	86
CB-8-240	240V AC	0.05	0.03	86
CB-10-6	6V DC	0.50	0.10	86
CB-10-12	12V DC	0.85	0.20	86
CB-10-24	24V DC	0.30	0.08	86
CB-10-120	120V AC	0.10	0.05	86
CB-10-240	240V AC	0.05	0.03	86

CB-4 (4 inch bell)

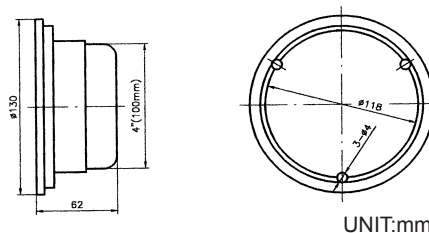

CB-6 CB-8 and CB-10 (6, 8, 10 inch bell)

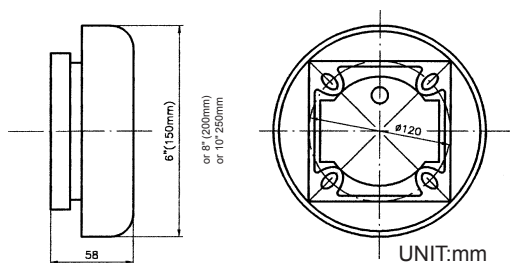

### Weather-Proof Back Box: Model CB-BX

