


FS-2 Series Light Duty Footswitches

Features:


- Low cost foot switch for light duty application
- High strength glass fiber reinforced plastic body
- Switch rating: 15A (1/2HP) 125/250V AC
- Operating temperature range: -20°C to +80°C (-4°F to + 176°F)
- UL/cUL approved (E240199)
- IP20 for standard version
- Water-proof to IPX8 Available on special request



Dimensions:

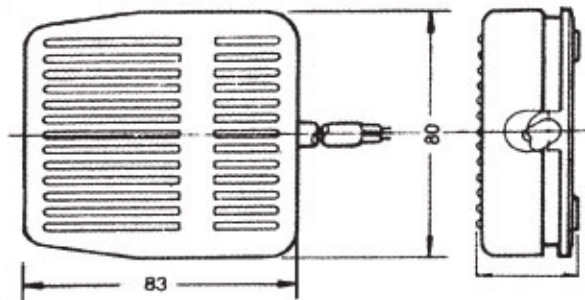

Guard Option

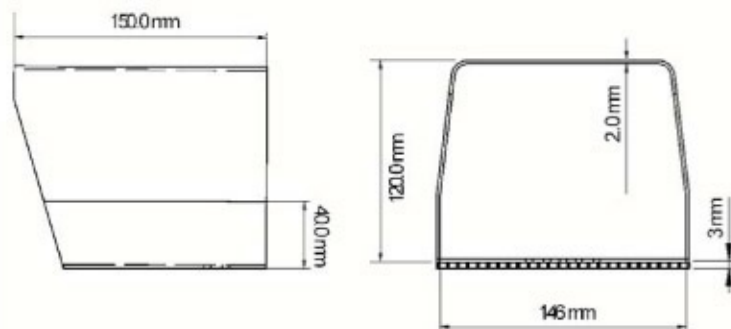

Selection Guide:

FS-1	<u>10</u>	<u>2</u>	-	<u>P</u>	<u>Twin</u>
	Electrical Rating	Option #1		Option #2	Option #3
	10: 10A/250VAC	2: Cable Length		P: Supplied with 3 prong series plug	Blank: Single pedal
	15: 15A/250VAC			G: with Protective Guard	Twin: Dual Pedal
				K: Gold plated contact	