

# DuPont™ Krytox® performance lubricants

**Table 1**  
**Krytox® Vacuum Pump Fluids\***

Property	Test			Krytox®					
	Method	Conditions	Units	1506/1506XP	1514/1514XP	1525/1525XP	1531/1531XP	1618	16256
Average Molecular Weight	NMR			2400	3500	4600	4900	4300	11000
Vapor Pressure**	Knudsen	20°C (68°F)	torr	4 x 10 <sup>-7</sup>	2 x 10 <sup>-7</sup>	1 x 10 <sup>-7</sup>	1 x 10 <sup>-7</sup>	5 x 10 <sup>-9</sup>	3 x 10 <sup>-14</sup>
		50°C (122°F)		1 x 10 <sup>-5</sup>	3 x 10 <sup>-6</sup>	1 x 10 <sup>-6</sup>	1 x 10 <sup>-6</sup>	2 x 10 <sup>-7</sup>	2 x 10 <sup>-12</sup>
		100°C (212°F)		1 x 10 <sup>-3</sup>	1 x 10 <sup>-4</sup>	3 x 10 <sup>-5</sup>	3 x 10 <sup>-5</sup>	2 x 10 <sup>-5</sup>	1 x 10 <sup>-9</sup>
		200°C (392°F)		5 x 10 <sup>-1</sup>	1 x 10 <sup>-2</sup>	2 x 10 <sup>-3</sup>	2 x 10 <sup>-3</sup>	1 x 10 <sup>-2</sup>	2 x 10 <sup>-6</sup>
Kinematic Viscosity	ASTM D445	20°C (68°F)	mm <sup>2</sup> /s	62	142	261	310	175	2717
		50°C (122°F)	(cSt)	16	32	53	63	37	444
		100°C (212°F)		4.4	7.2	11	12.5	8	63
		200°C (392°F)		1.2	1.7	2.2	2.5	1.8	8.4
Density		20°C (68°F)	g/cc	1.88	1.89	1.90	1.90	1.89	1.92
		50°C (122°F)		1.82	1.83	1.84	1.84	1.83	1.87
		100°C (212°F)		1.73	1.74	1.75	1.75	1.74	1.78
		200°C (392°F)		1.54	1.55	1.56	1.56	1.55	1.61
Pour Point	ASTM D97		°C (°F)	-60 (-76)	-54 (-65)	-48 (-54)	-41 (-42)	-40 (-40)	-15 (5)
Distillation Range at 0.4 torr	ASTM D1160	10%	°C (°F)	160 (320)	200 (392)	200 (392)	200 (392)	210 (410)	NA
		90%		220 (428)	280 (536)	300 (572)	300 (572)	280 (536)	NA
Heat of Vaporization	Knudsen	150–250°C (302–482°F)	cal/g	9	7	6	6	7	NA
Volatility at 22 hr	ASTM D2595	121°C (250°F)	%	7.3	1.9	1.0	1.0	0.5	0.2
Volatility at 22 hr	ASTM D972	149°C (300°F)	%	6	1	0.5	0.5	0.1	NA
		204°C (399°F)		35	3	Nil	Nil	8.9	0.3
Surface Tension		25°C (77°F)	dyn/cm	17	18	19	19	18	19

\* This table gives typical properties based on historical production performance. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

\*\* Actual values are equal to or less than those indicated.

Krytox® VPF fluids are now available with antirust protection. The new fluids are called 1506XP, 1514XP, 1525XP, and 1531XP. They have all of the same properties of the standard fluids listed above. Krytox® XP VPF oils contain a soluble additive to prevent rust. This new patented additive enhances the performance of Krytox® VPF fluids, giving them improved performance properties. The long-term antirust properties repel moisture, providing extra protection from corrosion of metal parts and bearing surfaces.


While Krytox® VPF fluids are inert and nonreactive to all elastomers, plastics, and metals, the soluble additives in the XP products are new and have not been tested with all materials. It is possible that some reactivity and damage could occur to some materials. Initial testing has shown no problems with Teflon®, Kalrex®, Viton®, nitrile, and silicone rubbers. There is some reactivity of the additive with copper, but it is less with brass. These additives could have degradation of performance at elevated temperatures over 175°C (347°F) over a long period of time.

**Table 2**  
**Other Krytox® Fluids for Vacuum Service\***


Krytox®	Vapor Pressure, torr at 20°C (68°F)	Kinematic Viscosity, mm <sup>2</sup> /s	Pour
	(Knudsen)	(cSt at 20°C [68°F])	Point, °C (°F)
16350	–4 x 10 <sup>-15</sup>	3500	–5 (23)
1645	–5 x 10 <sup>-12</sup>	509	–35 (–31)

\* This table gives typical properties based on historical production performance. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

**Figure 1. Typical Vapor Pressure-Temperature Characteristics**

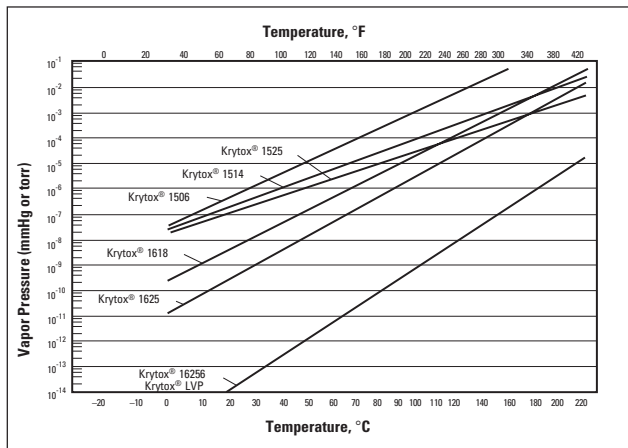

**Figure 2. Relative Weight Loss of PFPE Fluids in Presence of a Lewis Acid (90 min at 120°C [248°F] by ISOTGA)**

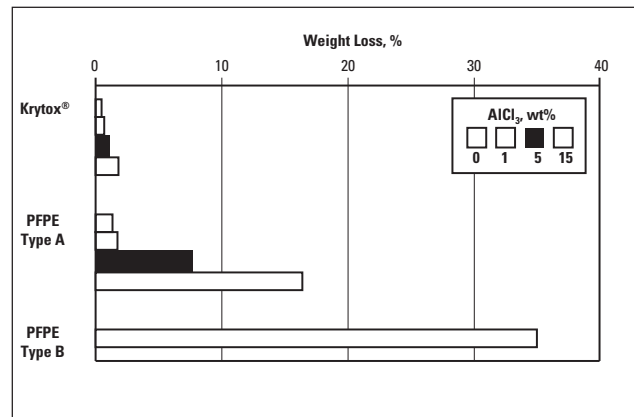

**Table 3  
Krytox® LVP High-Vacuum Grease\***

Penetration (worked, 25°C [77°F]), mm/10	280
NLGI Consistency Grade	2
Vapor Pressure	
torr at 20°C (68°F)	$<1.0 \times 10^{-13}$
torr at 200°C (392°F)	$<1.0 \times 10^{-5}$
kPa at 20°C (68°F)	$<1.3 \times 10^{-14}$
kPa at 200°C (392°F)	$<1.3 \times 10^{-6}$
Oil Separation (30 hr, 204°C [399°F]), wt%	13.8
Evaporation Loss (22 hr, 204°C [399°F]), wt%	0.3
Density, (25°C [77°F]), g/cc	1.94

\* This table gives typical properties based on historical production performance. DuPont does not make any express or implied warranty that these products will continue to have these typical properties.

**Table 4  
Initial Temperature for Depolymerization\***

Fluid Type	°C (°F)
Perfluoroalky Ether Krytox® (no -O-CF <sub>2</sub> -O- links)	142 (287)
Type A (some -O-CF <sub>2</sub> -O- links)	102 (216)
Type B (many -O-CF <sub>2</sub> -O- links and no shielding)	72 (162)
Hydrocarbon	79 (174)
Silicone	58 (136)
Fluorosilicone	82 (180)

\* This is the threshold temperature for the initial reaction in the presence of the Lewis Acid Aluminum Chloride as measured in a differential scanning calorimeter.

**For more information or technical assistance, call:**

**(800) 424-7502**

**or visit us on the Web:**

**<http://www.krytox.com>**

Or call the Krytox® hotline in the **United States** at (800) 424-7502, E-mail: [krytox@usa.dupont.com](mailto:krytox@usa.dupont.com)

**Canada** at 800-263-5924, E-mail: [products@can.dupont.com](mailto:products@can.dupont.com)

**Europe, Mideast, and Africa** at +32.3.543.1267, E-mail: [lubricants@lux.dupont.com](mailto:lubricants@lux.dupont.com)

**Asia/Pacific—Including India** at 886-2-2514-4434, E-mail: [krytox.lubricants@twm.dupont.com](mailto:krytox.lubricants@twm.dupont.com)

**Mexico and Central America** at 011-52-55-5722-1150, E-mail: [ceac@mex.dupont.com](mailto:ceac@mex.dupont.com)

**South America—All Countries** at 55-11-4166-8601, E-mail: [produtos.brasil@bra.dupont.com](mailto:produtos.brasil@bra.dupont.com)

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill and at their own discretion and risk. Because conditions of use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

The DuPont oval logo, DuPont™, The miracles of science®, and Krytox® are trademarks or registered trademarks of DuPont.

Copyright © 2003 E.I. du Pont de Nemours and Company. All rights reserved.



*The miracles of science®*