

G

Sensor Systems

INDEX

Sensor Systems

Linear Gage

Linear Gage / Display Selection Guide	G-2,3
Linear Gage LGB	G-4
Linear Gage LGK	G-5
Linear Gage LGF	G-6
Linear Gage LGF-Z	G-7
Linear Gage LGD	G-8
Linear Gage LGS	G-9
Laser Hologage LGH	G-10
Linear Gage LGB	G-10
Laser Hologage	G-11
Long Stroke Linear Gage LG/LGM	G-12
EC Counter	G-13
EB Counter	G-14
EG Counter	G-15
EH Counter	G-16
EV Counter	G-17
D-EV Display Unit	G-18
SENSORPAK	G-18
Litematic and Litematic Head	G-19,20

Laser Scan Micrometer

Laser Scan Micrometer Selection Guide	G-21,22
Laser Scan Micrometer LSM-9506	G-23
Laser Scan Micrometer LSM-902 / 6900	G-24
Laser Scan Micrometer LSM-500S	G-25
Laser Scan Micrometer LSM-501S	G-26
Laser Scan Micrometer LSM-503S	G-27
Laser Scan Micrometer LSM-506S	G-28
Laser Scan Micrometer LSM-512S	G-29
Laser Scan Micrometer LSM-516S	G-30
LSM-5200 Display Unit	G-31
Optional Accessories for LSM	G-32
Laser Scan Micrometer Application Example	G-33



Linear Gages



Laser Scan Micrometers








Linear Gage LGK



Laser Scan Micrometer LSM-500S

Linear Gage / Display Selection Guide

Resolution	Liner Gage			
		5mm	10mm	25mm
0.00001mm	LGH 0.01µm Laser Hologage Page G-11		LGH-110  LGH-110C Page G-10	
	LGB®2 Page G-4 LGK Page G-5 LGF® 0.1µm Page G-6	LGB2-0105L Page G-4	LGK-0110 LGF-0110L-B Page G-6	LGF-0125L-B Page G-6
0.0001mm	LGH 0.1µm Laser Hologage Page G-10		LGH-1010  LGH-1010C Page G-10	
	Motor Drive Page G-12			
0.0005mm	LGK Page G-5 LGF® 0.5µm Page G-6		LGF-0510L-B LGK-0510 Page G-5	LGF-0525L-B Page G-6
	LGK Page G-5 LGF® 1µm Page G-6		LGK-110 LGF-110L-B Page G-6	LGF-125L-B Page G-6
0.001mm	LGB® ø 8mm P399 Page G-4	LGB-105L Page G-4	LGB-110 LGB-110S LGB-110HLGB-110A LGB-110-1LGB-110AR Page G-4	
	Motor Drive Page G-12			
	LGB No/Nut Page G-4	LGB2-105L Page G-4	LGB2-110 LGB2-110H LGB2-110-1 LGB2-110S LGB2-110AR Page G-4	
0.005mm	LGF® 5µm No/Nut Page G-6			LGF-525L-B Page G-6
0.0005mm	LGF® 0.5µm Origin Mark Page G-6		LGF-0510ZL-B  Page G-6	LGF-0525ZL-B Page G-6
0.001mm	LGF® 1µm Origin Mark Page G-6		LGF-110ZL-B  Page G-6	LGF-125ZL-B Page G-6
0.01mm	LGD® Digimatic Page G-8		LGD-1010L-B  Page G-8	LGD-1025L-B Page G-8
	LGS Digimatic Page G-9		LGS-1012P  Page G-9	

Linear Gage LGB

SERIES 542 — 0.001mm Reading

FEATURES

- Extremely compact design. Available with an outside diameter as small as 8mm.
- The small photoelectric linear encoder assures high precision over the entire stroke range.
- The ball bearings used in the spindle unit ensure superb durability.




SPECIFICATIONS

Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
5mm (.2")	542-204	0.001mm	2μm	0.65N / 0.6N / 0.55N	8mm	—
5mm (.2")	542-204H	0.001mm	1μm	0.65N / 0.6N / 0.55N	8mm	—
10mm (.4")	542-222	0.001mm	2μm	0.8N / 0.75N / 0.7N	8mm	—
10mm (.4")	542-222H	0.001mm	1μm	0.8N / 0.75N / 0.7N	8mm	—
10mm (.4")	542-401	0.001mm	2μm	0.8N / 0.75N / 0.7N	8mm	Sine-wave output
10mm (.4")	542-224	0.001mm	2μm	0.6N / 0.55N / 0.5N	8mm	—
10mm (.4")	542-230	0.001mm	2μm	0.8N / 0.75N / 0.7N	8mm	w/ pneumatic cylinder
10mm (.4")	542-223	0.001mm	2μm	0.8N / 0.75N / 0.7N	8mm	w/ pneumatic cylinder
5mm (.2")	542-244	0.001mm	2μm	0.65N / 0.6N / 0.55N	9.5mm	Low measuring force
10mm (.4")	542-262	0.001mm	2μm	0.8N / 0.75N / 0.7N	9.5mm	—
10mm (.4")	542-262H	0.001mm	1μm	0.8N / 0.75N / 0.7N	9.5mm	—
10mm (.4")	542-421	0.001mm	2μm	0.8N / 0.75N / 0.7N	9.5mm	Sine-wave output
10mm (.4")	542-264	0.001mm	2μm	0.6N / 0.55N / 0.5N	9.5mm	Low measuring force
10mm (.4")	542-270	0.001mm	2μm	0.8N / 0.75N / 0.7N	9.5mm	w/ pneumatic cylinder

*Posture of gage: Upward (☉) / Horizontal (←○, →) / Downward (☽)

DIMENSIONS AND MASS

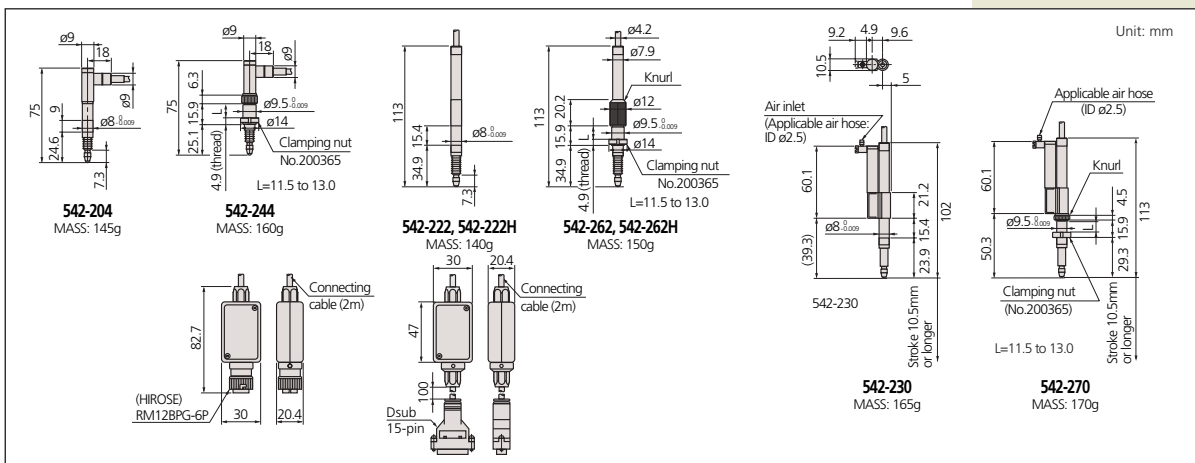

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 1μm
 Inch Resolution: Refer to the applicable counters
 Length standard: Photoelectric linear encoder
 Max. response speed: 900mm/s
 Contact point: ø3mm carbide
 Stem: ø8mm or ø9.5mm
 Bearing type: Stroke ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 (Sign-wave output: 542-401, 542-424)
 Signal pitch: 4μm
 Cable length: 80"/2m
 Dust/Water protection level: IP54

Applicable Counters

EH counter (542-060A, 542-062A)
 EB counter (542-092-2)
 EG counter (542-015)
 EV counter (542-063)

Optional Accessories

238773: Rubber boot for 5mm LGB (spare)
 238772: Rubber boot for 10mm LGB (spare)
 902434: Extension cable (5m)
 902433: Extension cable (10m)
 902432: Extension cable (20m)

Linear Gage LGK

SERIES 542 — 0.1µm, 0.5µm or 1µm Reading

Technical Data

Accuracy: Refer to the list of specifications (excluding quantizing error)
 Resolution: 1µm, 0.5µm or 0.1µm
 Inch Resolution: Refer to the applicable counters
 Length standard: Photoelectric linear encoder
 Max. response speed: 1500mm/s, 400mm/s (542-158)
 Contact point: ø3mm carbide
 Stem: ø8mm
 Bearing type: Stroke ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 Signal pitch: 0.4µm (542-158), 2µm (542-157), 4µm (542-156)
 Cable length: 80"/2m
 Dust/Water protection level: IP66

Applicable Counters

EH counter (542-060A, 542-062A)
 EG counter (542-015)
 EB counter (542-092-2)*
 EV counter (542-063)*

* Only applicable for resolution 0.0005mm and 0.001mm LGK

Optional Accessories

238772: Rubber boot (10mm)
 902434: Extension cable (5m)
 902433: Extension cable (10m)
 902432: Extension cable (20m)
 02ADE230: Air drive unit
 02ADB680: Thrust stem set
 02ADB682: Clamping nut
 02ADB683: Wrench

FEATURES

- Compact design with a 8mm stem diameter
- Excellent protection against dust and water splash (IP-66) in harsh shop-floor environments.
- Maximum permissible acceleration values for shock and impact, 11ms (IEC68-2-27)
- Output differential square wave signals for a wide range of applications.
- Employs linear stroke bearings on the spindle movement for durability
- Thrust Stem with a clamping nut is optional.
- Interchangeable contact points for dial indicators can be used.




SPECIFICATIONS

Range	Order No.	Resolution	Accuracy*	Measuring force**	Stem dia.	Remarks
10mm (.4")	542-156	0.001mm	(1.5+L/50)µm	0.65N / 0.6N / 0.55N	8mm	—
10mm (.4")	542-157	0.0005mm	(1.5+L/50)µm	0.65N / 0.6N / 0.55N	8mm	—
10mm (.4")	542-158	0.0001mm	(0.8+L/50)µm	0.65N / 0.6N / 0.55N	8mm	—

*L = Measured length (mm) **Posture of gage: Upward (⤴) / Horizontal (↔) / Downward (⤵)

DIMENSIONS AND MASS

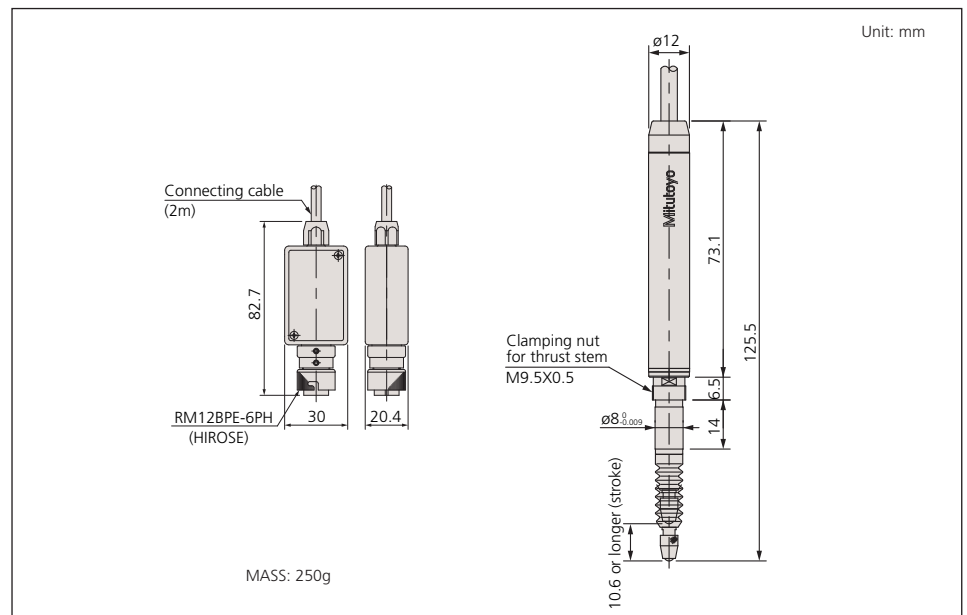

Mitutoyo

Linear Gage LGF

SERIES 542 — 0.1µm, 0.5µm or 1µm Reading



Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 1µm, 0.5µm or 0.1µm
 Inch Resolution: Refer to the applicable counters
 Length standard: Photoelectric linear encoder
 Max. response speed: 1500mm/s, (400mm/s: **542-181**, **542-182**)
 Contact point: ø3mm carbide
 Stem: ø8mm or ø15mm
 Bearing type: Stroke ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 Signal pitch: 4µm (**542-161**, **542-162**, **542-163**), 2µm (**542-171**, **542-172**, **542-173**) or 0.4µm (**542-181**, **542-182**)
 Cable length: 80"/2m
 Dust/Water protection level: IP66

Applicable Counters

EH counter (**542-075A**, **542-071A**)
 EG counter (**542-015**)
 EB counter (**542-092-2**)
 EV counter (**542-063**)

SPECIFICATIONS


Range	Order No.	Resolution	Accuracy*	Measuring force**	Stem dia.	Remarks
10mm (.4")	542-181	0.0001mm	(0.8+L/50)µm	1.2N / 1.1N / 1.0N	8mm	—
10mm (.4")	542-171	0.0005mm	(1.5+L/50)µm	1.2N / 1.1N / 1.0N	8mm	—
10mm (.4")	542-161	0.001mm	(1.5+L/50)µm	1.2N / 1.1N / 1.0N	8mm	—
25mm (1")	542-182	0.0001mm	(0.8+L/50)µm	4.6N / 4.3N / 4.0N	15mm	—
25mm (1")	542-172	0.0005mm	(1.5+L/50)µm	4.6N / 4.3N / 4.0N	15mm	—
25mm (1")	542-162	0.001mm	(1.5+L/50)µm	4.6N / 4.3N / 4.0N	15mm	—
25mm (1")	542-612	0.005mm	(7.5+L/50)µm	4.6N / 4.3N / 4.0N	15mm	—
50mm (2")	542-173	0.0005mm	(1.5+L/50)µm	5.7N / 5.3N / 4.9N	15mm	—
50mm (2")	542-163	0.001mm	(1.5+L/50)µm	5.7N / 5.3N / 4.9N	15mm	—
50mm (2")	542-613	0.005mm	(7.5+L/50)µm	5.7N / 5.3N / 4.9N	15mm	—

*L = Measured length (mm) **Posture of gage: Upward (♀) / Horizontal (♂) / Downward (♁)

Optional Accessories

238772: Rubber boot (10mm)
962504: Rubber boot (25mm)
962505: Rubber boot (50mm)
902434: Extension cable (5m*)
902433: Extension cable (10m*)
902432: Extension cable (20m*)
02ADB680: Thrust stem set (for 10mm range models)
02ADB690: Thrust stem set (for 25, 50mm range models)
02ADE230: Air lifting units (10mm range)
02ADE250: Air lifting units (25mm range)
02ADE270: Air lifting units (50mm range)
 *not available for **542-181** and **542-182**

DIMENSIONS AND MASS

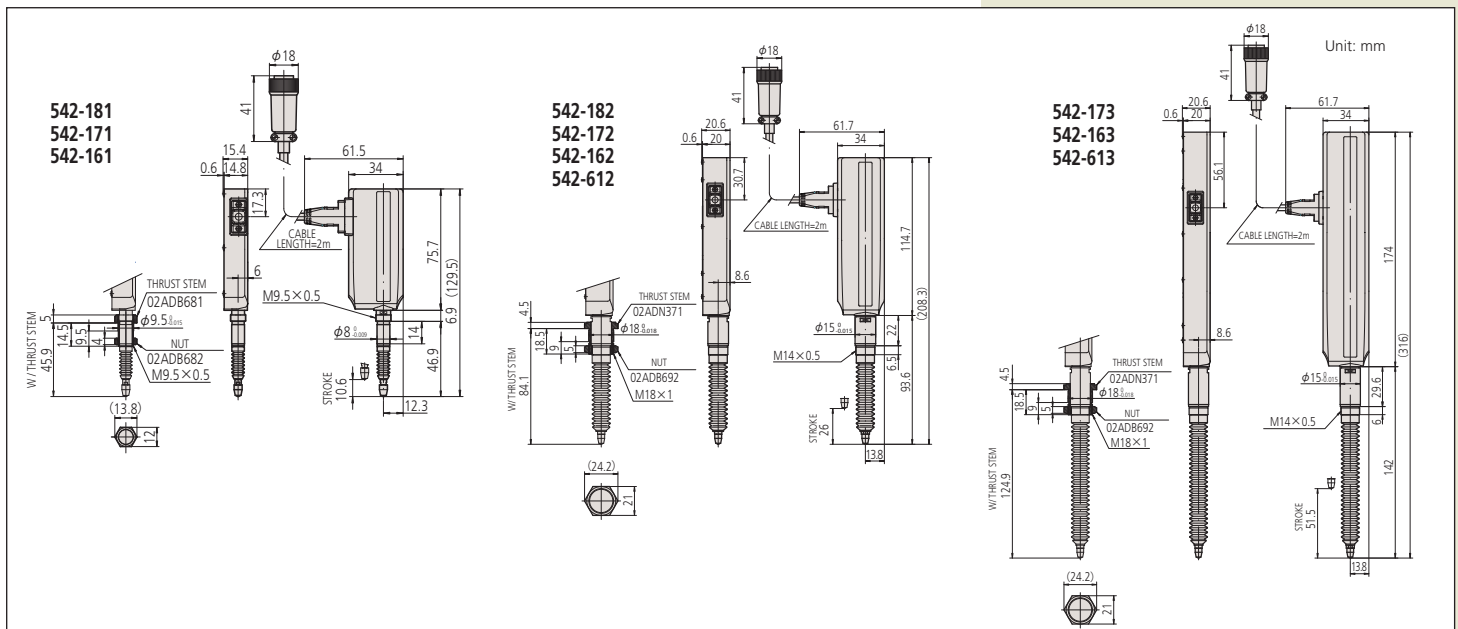

Linear Gage LGF-Z with Origin Point Mark

SERIES 542 — 0.5µm or 1µm Reading

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 1µm or 0.5µm
 Inch Resolution: Refer to the applicable counters
 Length standard: Photoelectric linear encoder
 Max. response speed: 1500mm/s
 Contact point: ø3mm carbide
 Stem: ø8mm or ø15mm
 Bearing type: Stroke ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 Signal pitch: 4µm (542-164, 542-165, 542-166) or 2µm (542-174, 542-175, 542-176)
 Cable length: 80"/2m
 Dust/Water protection level: IP66

Applicable Counters

EH counter (542-073A)
 EB counter (542-094-2)
 EG counter (542-017)
 EV counter (542-067)

Optional Accessories

238772: Rubber boot (10mm)
 962504: Rubber boot (25mm)
 962505: Rubber boot (50mm)
 02ADB680: Thrust stem set (for 10mm range models)
 02ADB690: Thrust stem set (for 25, 50mm range models)
 02ADE230: Air lifting units (10mm range)
 02ADE250: Air lifting units (25mm range)
 02ADE270: Air lifting units (50mm range)




SPECIFICATIONS

Range	Order No.	Resolution	Accuracy*	Measuring force**	Stem dia.	Remarks
10mm (.4")	542-174	0.0005mm	(1.5+L/50)µm	1.2N / 1.1N / 1.0N	8mm	w/ origin point mark
10mm (.4")	542-164	0.001mm	(1.5+L/50)µm	1.2N / 1.1N / 1.0N	8mm	w/ origin point mark
25mm (1")	542-175	0.0005mm	(1.5+L/50)µm	4.6N / 4.3N / 4.0N	15mm	w/ origin point mark
25mm (1")	542-165	0.001mm	(1.5+L/50)µm	4.6N / 4.3N / 4.0N	15mm	w/ origin point mark
50mm (2")	542-176	0.0005mm	(1.5+L/50)µm	5.7N / 5.3N / 4.9N	15mm	w/ origin point mark
50mm (2")	542-166	0.001mm	(1.5+L/50)µm	5.7N / 5.3N / 4.9N	15mm	w/ origin point mark

*L = Measured length (mm) **Posture of gage: Upward (⊙) / Horizontal (←, →) / Downward (⊖)

DIMENSIONS AND MASS

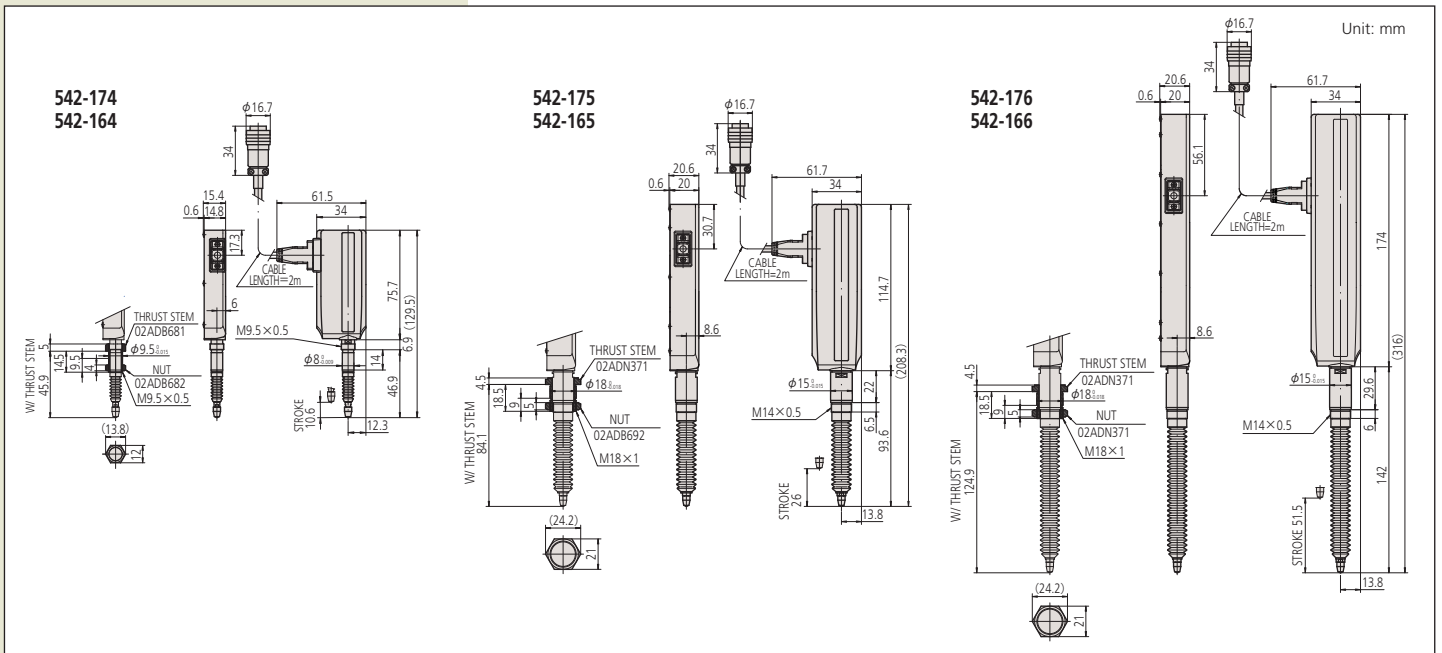

Linear Gage LGD

SERIES 575 — .0005" / 0.01mm Reading

The LGD is an ultra-compact ABS Linear Gage designed to fit into very tight spaces. It keeps track of its origin point once set.

FEATURES

- The use of an absolute scale* in the sensor makes it possible to maintain the origin setting even when the power is switched off.

- Special linear ball bearings are used for the spindle guide to ensure a long service life.
- Optional thrust stem and tightening nut facilitate setup of the LGD linear gage in holes of a plate or fixture.



Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 1μm or .0005"
 Length standard: Capacitance-type ABSOLUTE linear encoder
 Max. response speed: Unlimited
 Contact point: ø3mm carbide
 Stem: ø8mm or ø15mm
 Bearing type: Stroke ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: Digimatic output
 External input: Origin-setting signal (Absolute origin position can be changed externally.)
 Cable length: 80"/2mm

Applicable Counters

EC counter (542-007A)
 EB counter (542-093-2)
 EG counter (542-016)
 EV counter (542-064)

Optional Accessories

238772: 10mm rubber boot (spare)
 962504: 25mm rubber boot (spare)
 962505: 50mm rubber boot (spare)
 02ADC730: ø9.5mm Thrust stem set (for 10mm model)
 02ADC740: ø18mm Thrust stem set (for 25mm/50mm model)
 965275*: Digimatic Power Supply Unit
 02ADE230: Air lifting units (10mm range)
 02ADE250: Air lifting units (25mm range)
 02ADE270: Air lifting units (50mm range)


* To denote your AC line voltage add the following suffixes to the order No. (e.g.: 965275A):
A for UL/CSA, **D** for CEE, **E** for BS, **F** for SAA, **DC** for China, **K** for EK, **No suffix** is required for JIS/100V

SPECIFICATIONS

Metric		LGD				
Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
10mm	575-326	0.01mm	20μm	1.2N / 1.1N / 1.0N	8mm	—
25mm	575-327	0.01mm	20μm	4.6N / 4.3N / 4.0N	15mm	—
50mm	575-328	0.01mm	30μm	5.7N / 5.3N / 4.9N	15mm	—

Inch		LGD				
Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
.4"	575-336	.0005"	.001"	1.2N / 1.1N / 1.0N	8mm	—
1"	575-337	.0005"	.001"	4.6N / 4.3N / 4.0N	15mm	—
2"	575-338	.0005"	.0012"	5.7N / 5.3N / 4.9N	15mm	—

DIMENSIONS AND MASS

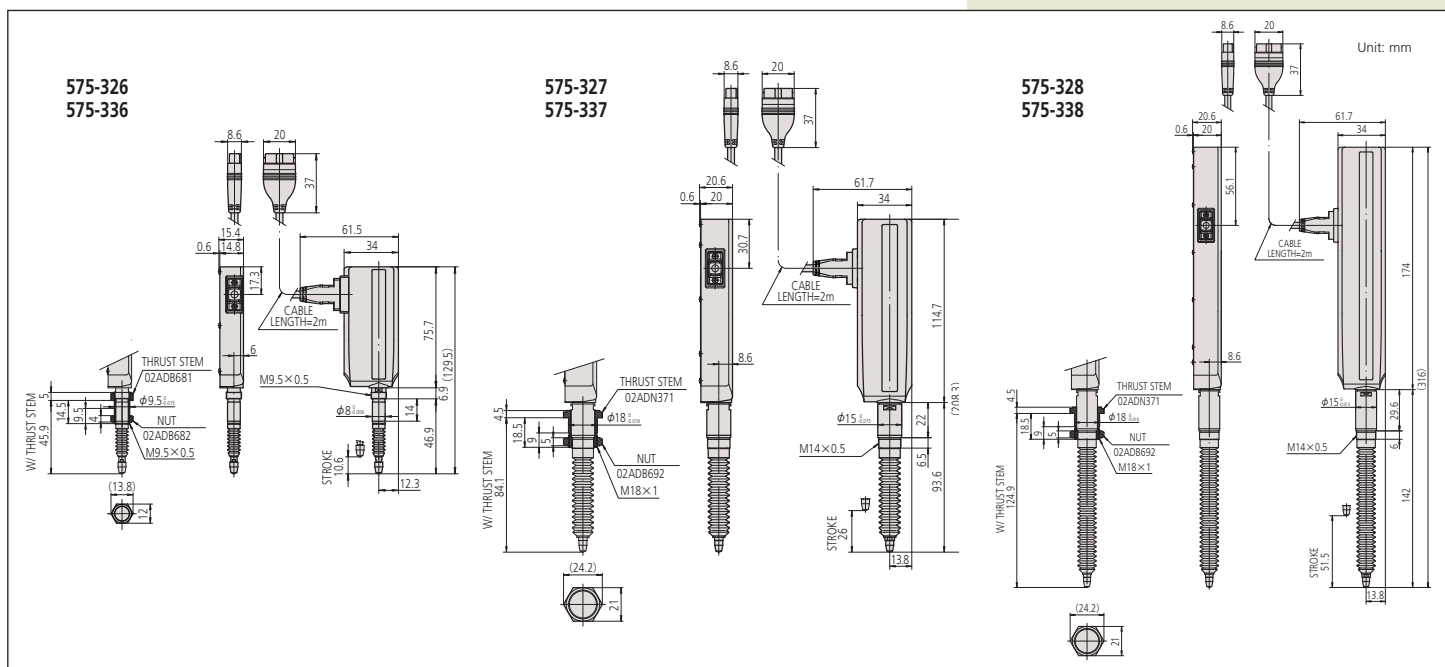



Linear Gage LGS

SERIES 575 — .0005" / 0.01mm Reading

The LGS is compact Linear Gage designed to fit into tight spaces.

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 0.01mm or .0005"
 Length standard: Capacitance-type ABSOLUTE linear encoder
 Max. response speed: Unlimited
 Contact point: \varnothing 3mm carbide (\varnothing 3mm steel: **575-313**)
 Stem: \varnothing 8mm or 3/8" DIA
 Bearing type: Slide-bearing
 Measuring force: Refer to the list of specifications
 Output signal: Digimatic output
 Cable length: 80"/2m
 Dust/Water protection level: IP66

Applicable Counters

EC counter (**542-007A**)
 EB counter (**542-093-2**)
 EG counter (**542-016**)
 EV counter (**542-064**)

Optional Accessories

238774: Spare rubber boot
903594: Air Drive Unit (metric)
903598: Air Drive Unit (inch)
02ADF640: SPC cable extension adapter
02ADD950: Extension cable (0.5m)
936937: Extension cable (1m)
965014: Extension cable (2m)
 —: EC Counter



575-303

SPECIFICATIONS

Metric


Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
12.7mm	575-303	0.01mm	0.015mm	2.0N / 1.8N / 1.6N	8mm	—

Inch

Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
.5"	575-313	.0005"	.0006"	2.0N / 1.8N / 1.6N	3/8 DIA	—

*Posture of gage: Upward (♀) / Horizontal (+○, ○+) / Downward (♂)

DIMENSIONS AND MASS

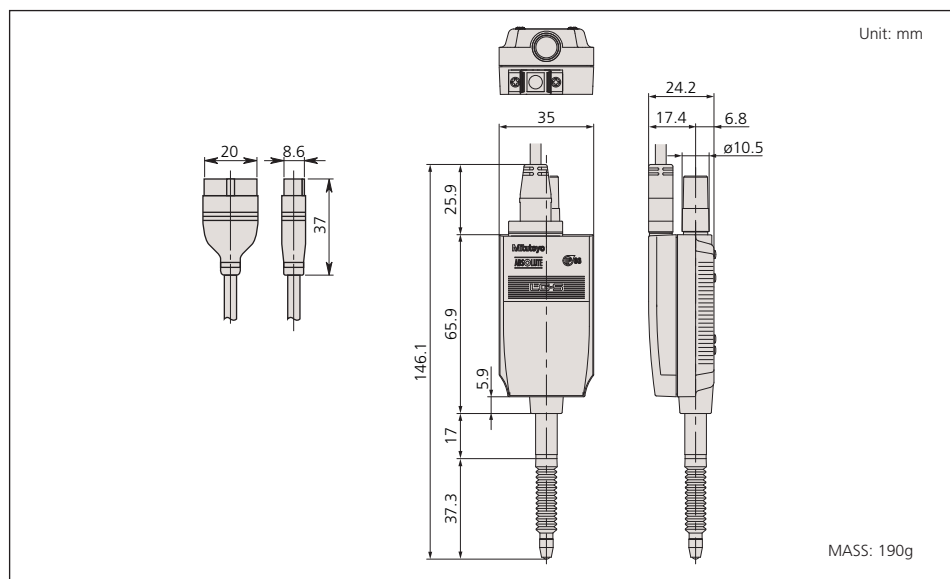

Laser Hologage LGH

SERIES 542 — 0.1µm Reading

These are extra-high accuracy gaging heads provided with resolution up to 0.0001mm. The compact dimensions allow easy installation to very tight spaces. The Laser Hologage employs a unique holography scale as the length standard, ensuring excellent measuring accuracy and repeatability. The dedicated display unit (EH Counter) is optional.

FEATURES

- A linear ball bearing in the spindle guide provides excellent durability for an extended service life.
- The 0.0001mm reading type LGB linear gage (542-246) comes with a clamping nut on the stem.




SPECIFICATIONS

Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
10mm (.4")	542-711-1	0.1µm	0.2µm	0.55N / 0.45N / 0.35N	15mm	—
10mm (.4")	542-712-1	0.1µm	0.2µm	0.1N / — / —	15mm	Low measuring force

*Posture of gage: Upward (♀) / Horizontal (♂, ♂) / Downward (♂)

DIMENSIONS AND MASS

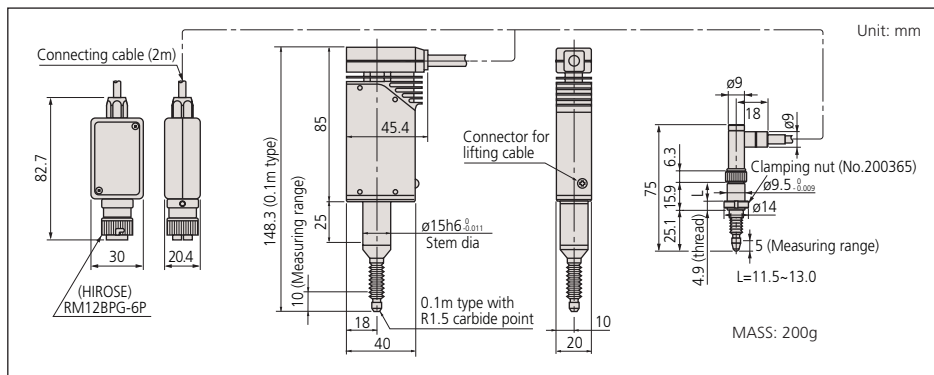

Linear Gage LGB

SERIES 542 — 0.1µm Reading




SPECIFICATIONS

Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
5mm (.2")	542-246	0.1µm	0.8µm	0.65N / 0.60N / 0.55N	9.5mm	—

*Posture of gage: Upward (♀) / Horizontal (♂, ♂) / Downward (♂)

DIMENSIONS AND MASS

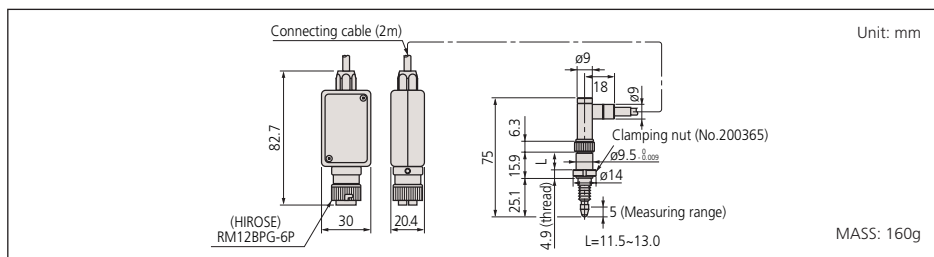

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 0.1µm
 Inch Resolution: Refer to the applicable counters
 Length standard: Laser-hologram measurement sensor
 Max. response speed: 250mm/s
 Contact point: R1.5mm carbide
 Stem: ø15mm
 Bearing type: High precision linear ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 Signal pitch: 0.25µm
 Cable length: 80"/2m

Applicable Counters

EH counter (542-075A, 542-071A)
 EG counter (542-015)

Optional Accessories

238773: Rubber boot
 971751: Stem fixture for fixing to top surface
 971752: Stem fixture for fixing to bottom surface
 971753: Spindle lifting cable
 971750: Laser Hologage stand

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 0.1µm
 Inch Resolution: Refer to the applicable counters
 Length standard: Photoelectric linear encoder
 Max. response speed: 380mm/s
 Contact point: R1.5mm carbide
 Stem: ø9.5mm
 Bearing type: Linear ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 Signal pitch: 0.4µm
 Cable length: 80"/2m
 Dust/Water protection level: IP54

Applicable Counters

EH counter (542-075A, 542-071A)
 EG counter (542-015)

Optional Accessories

902434: Extension cable (5m)
 902433: Extension cable (10m)
 902432: Extension cable (20m)
 238773: Rubber boot

Laser Hologage

SERIES 542 — 0.01 μ m / 1 μ in Reading

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 0.01 μ m
 Length standard: Laser-hologram measurement sensor
 Max. response speed: 250mm/s
 Contact point: R5mm carbide
 Stem: ϕ 15mm
 Bearing type: High precision linear ball bearing
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, two-phase sine wave
 Signal pitch: 0.25 μ m
 Cable Length: 80"/2m

Optional Accessories

971751: Stem fixture for fixing to top surface
 971752: Stem fixture for fixing to bottom surface
 971753: Spindle lifting cable
 971750: Laser Hologage stand

The Mitutoyo Laser Hologage is a high-end digital gaging system that employs diffracted laser beam interference to make highly accurate and repeatable measurements. It features ultra-fine diffraction gratings which are holographically recorded on the scale. The Laser Hologage is suitable for measuring ultra-high precision parts, especially those in semiconductor and related industries.

FEATURES

- Highly accurate measurement due to an ultra-high resolution of 0.00001mm (0.01 μ m), which is close to the performance of laser interferometers.
- Excellent measuring stability — the design is also highly resistant to unfavorable environmental conditions such as air movement and atmospheric pressure changes.
- High-precision linear ball bearings are used in the guide for extremely smooth movement and exceptional durability.
- A display unit is provided.



Gage head




EH-120S

SPECIFICATIONS

Range	Order No.	Resolution	Accuracy	Measuring force*	Stem dia.	Remarks
10mm (.4")	542-925A	0.01 μ m / 1 μ inch	0.1 μ m	0.55N / 0.45N / 0.35N	15mm	—
10mm (.4")	542-926A	0.01 μ m / 1 μ inch	0.1 μ m	0.1N / — / —	15mm	Low measuring force

*Posture of gage: Upward (\uparrow) / Horizontal (\leftrightarrow) / Downward (\downarrow)

DIMENSIONS AND MASS

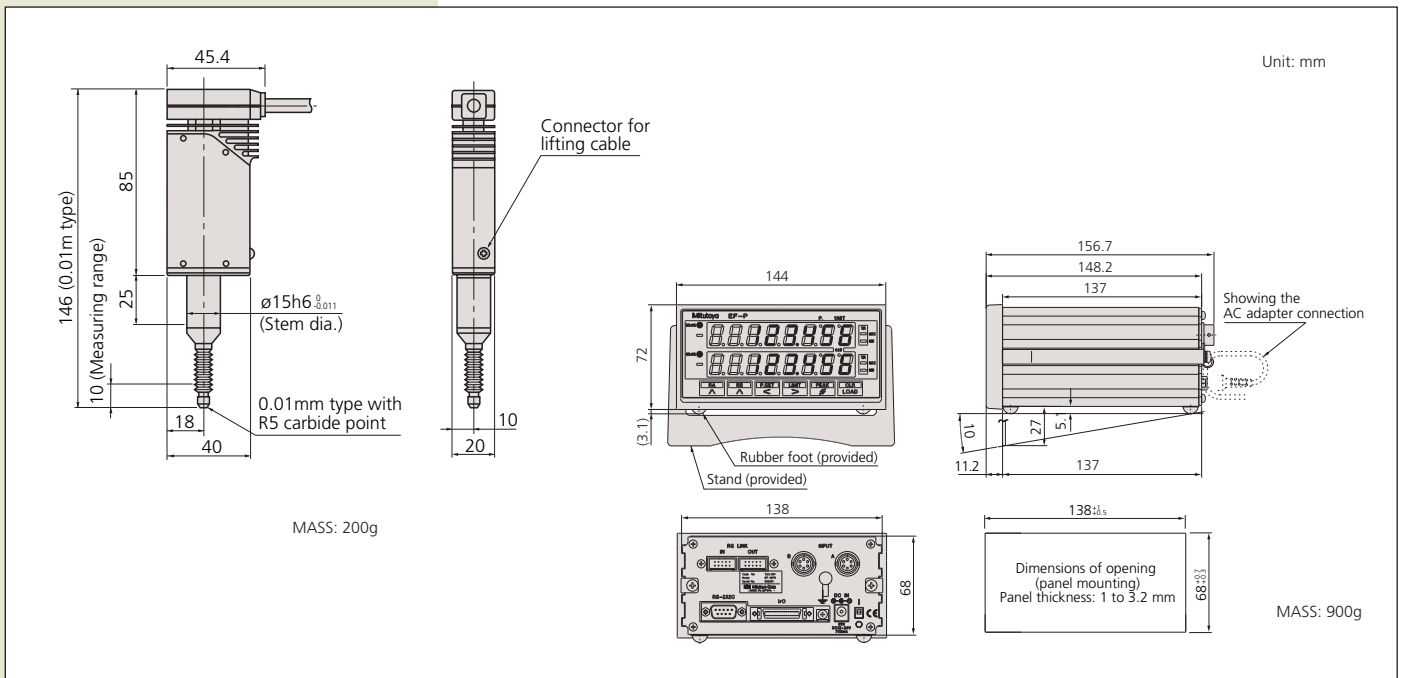


Long Stroke Linear Gage LG/LGM

SERIES 542 — 0.1 / 1 μ m Reading

FEATURES

- There are three types including the standard model, low measuring force model, and rubber boot model (made-to-order) available.

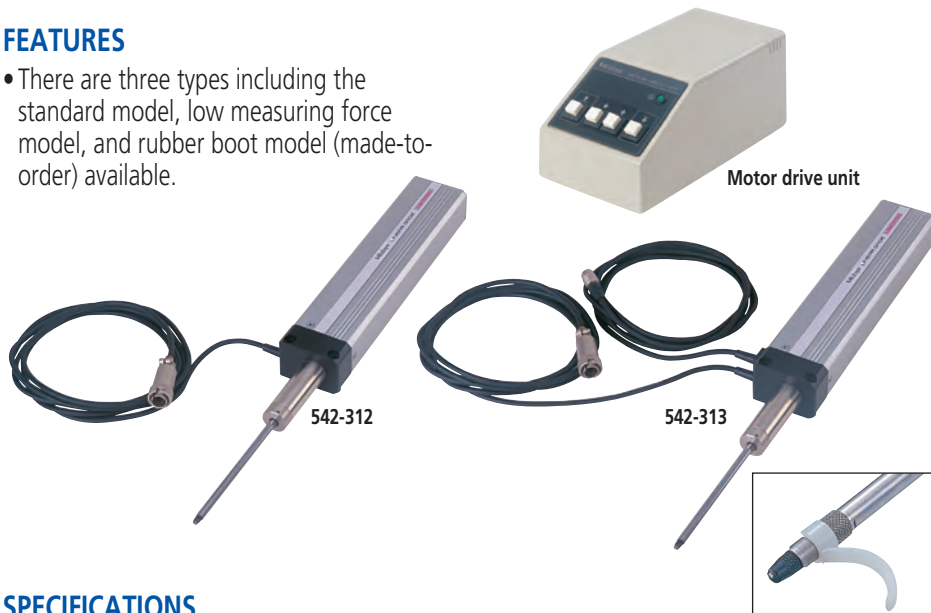

Technical Data

Accuracy: Refer to the list of specifications
 Resolution: 1 μ m or 0.1 μ m
 Inch Resolution: Refer to the applicable counters
 Length standard: Photoelectric linear encoder
 Max. response speed: 400mm/s (800mm/s: motor-driven type)
 Contact point: ϕ 3mm carbide
 Stem: ϕ 20mm
 Bearing type: Bearing guide
 Measuring force: Refer to the list of specifications
 Output signal: 90° phase difference, differential square wave (RS-422A equivalent)
 Cable length: 80"/2m
 Dust/Water protection level: IP54

Applicable Counters

EH counter (542-075A, 542-071A)
 EG counter (542-015)
 EB counter (542-092-2)*
 EV counter (542-063)*
 * Resolution 1 μ m LGM only

SPECIFICATIONS


Range	Order No.	Resolution	Accuracy*	Measuring force**	Stem dia.	Remarks
100mm (4")	542-312	0.1 μ m	(2+L/100) μ m \leq 2.5 μ m	8.0N / 6.5N / 5.0N	20mm	Standard
100mm (4")	542-316	0.1 μ m	(2+L/100) μ m \leq 2.5 μ m	3.0N / — / —	20mm	Low measuring force
100mm (4")	542-314	0.1 μ m	(2+L/100) μ m \leq 2.5 μ m	8.0N / 6.5N / 5.0N	20mm	w/ rubber boot
100mm (4")	542-332	1 μ m	(2.5+L/100) μ m \leq 3 μ m	8.0N / 6.5N / 5.0N	20mm	Standard
100mm (4")	542-336	1 μ m	(2.5+L/100) μ m \leq 3 μ m	3.0N / — / —	20mm	Low measuring force
100mm (4")	542-334	1 μ m	(2.5+L/100) μ m \leq 3 μ m	8.0N / 6.5N / 5.0N	20mm	w/ rubber boot

*L = Measured length (mm) **Posture of gage: Upward / Horizontal / Downward

Range	Order No.	Resolution	Accuracy*	Measuring force**	Stem dia.	Remarks
100mm (4")	542-313	0.1 μ m	(2+L/100) μ m \leq 2.5 μ m	3.0N / 6.5N / 9.5N	20mm	Motor-driven Type
100mm (4")	542-315	0.1 μ m	(2+L/100) μ m \leq 2.5 μ m	4.5N / — / 6.0N	20mm	Motor-driven Type
100mm (4")	542-333	1 μ m	(2.5+L/100) μ m \leq 3 μ m	3.0N / 6.5N / 9.5N	20mm	Motor-driven Type
100mm (4")	542-335	1 μ m	(2.5+L/100) μ m \leq 3 μ m	4.5N / — / 6.0N	20mm	Motor-driven Type

*L = Measured length (mm) **Posture of gage: Upward (↕) / Horizontal (↔) / Downward (⤵) With rubber boot: 542-315, 542-335

DIMENSIONS AND MASS

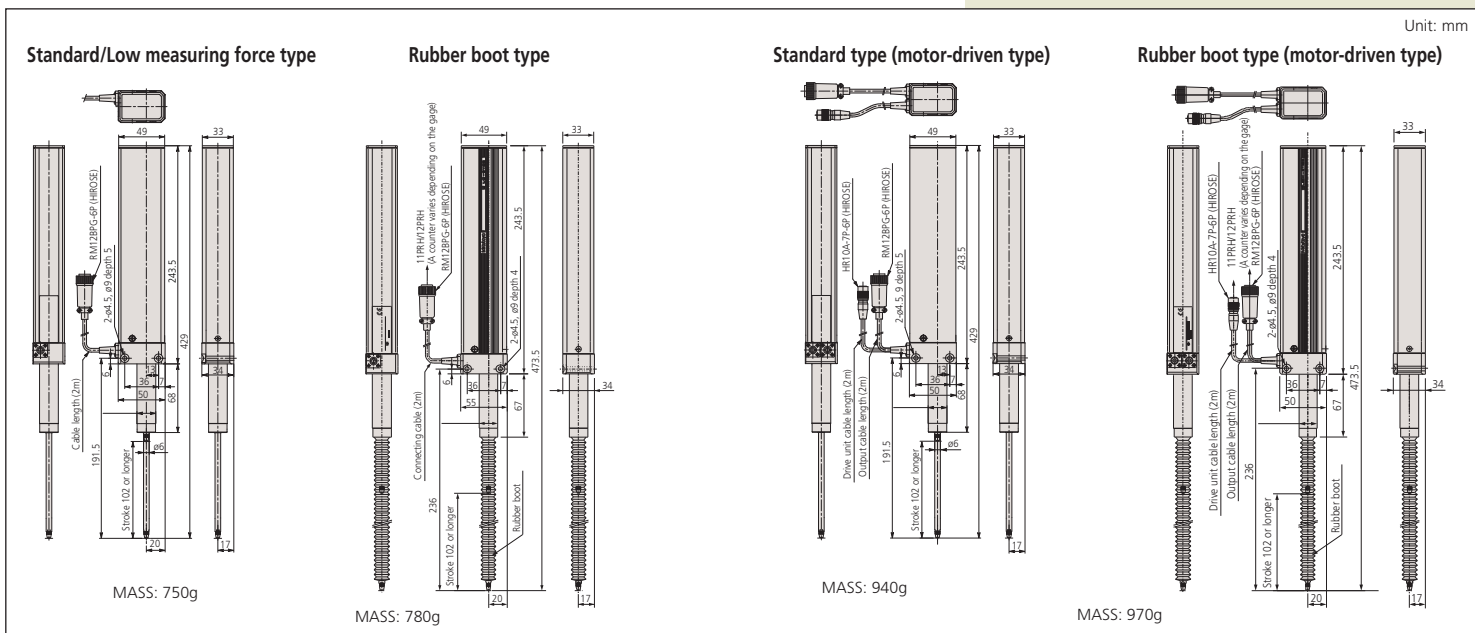

EC Counter

SERIES 542 — Assembly Type Display Unit for LGD and LGS

Function

Zero set
Preset, GO/±NG judgment

Output (selectable)

Tolerance judgment: -NG, OK, +NG (open-collector)
Data: Digimatic code (SPC)

External control signal input

Preset, data hold

Power supply

Via AC adaptor 06AEG302JA (Standard accessory)

Optional Accessories

936937: SPC cable (40"/1m)
965014: SPC cable (80"/1m)
214938: PJ-2 (DC Plug)
C162-155: GO/±NG judgement cable

FEATURES

- Employed the DIN size (96X48mm) and mount-on-panel configuration, which greatly facilitates the incorporation into a system.
- Possible to produce either tolerance judgment output or Digimatic output (SPC).




542-007



SPECIFICATIONS

Model	EC-101D
Order No.	542-007A
Applicable input	Digimatic code (SPC)
Applicable gage	LGD, LGD-L, LGD-ML, LGS and SPC output gages.
Number of gage input	1
Resolution	.001", .0005", .0001", .00005" / 0.01mm, 0.001mm (Automatically set depending on the gage.)
Display	6-digit and a negative [-] sign LED (Amber, Green, Red)

DIMENSIONS AND MASS

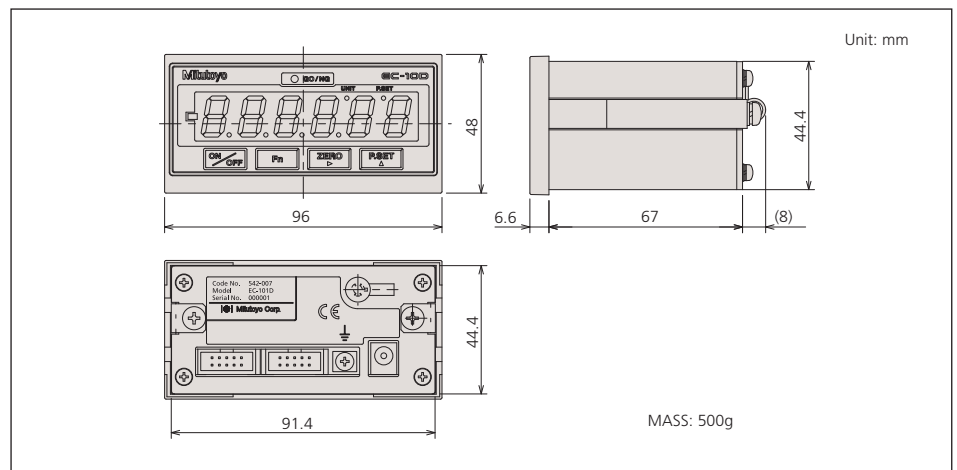

EB Counter

SERIES 542 — Assembly Type Display Unit with Multiple Limit Setting

FEATURES

- Possible to produce 3-step/5-step X 7 kinds of tolerance output and limit value output independently for each of 7 channels.
- Provided with serial BCD output capability, which makes the connection to a programmable controller or personal computer, etc. possible with the minimum cabling requirement.
- Possible to perform dynamic measurement with the simplified analog output.
- Employed the DIN size (96X48mm) and mount-on-panel configuration, which greatly facilitates the incorporation into a system.



542-092



542-093




542-094

SPECIFICATIONS

Model	EB-11P	EB-11Z	EB-11D
Order No.	542-092-2	542-094-2	542-093-2
Applicable input	Differential square-wave	Differential square-wave w/origin point mark	Digimatic code (SPC)
Applicable gage	LGK, LGF, LGB, LGE	LGF with origin point mark	LGD, LGS
Number of gage input	1		
Resolution	.0005", .0001", .00005", .000005" / 0.01mm, 0.005mm, 0.001mm, 0.0005mm		.0005", .0001", .00005" / 0.01mm, 0.001mm
Tolerance judgment display	LED display (3 steps: Amber, Green, Red/5 steps: Amber, Amber flash, Green, Red flash, Red)		

DIMENSIONS AND MASS

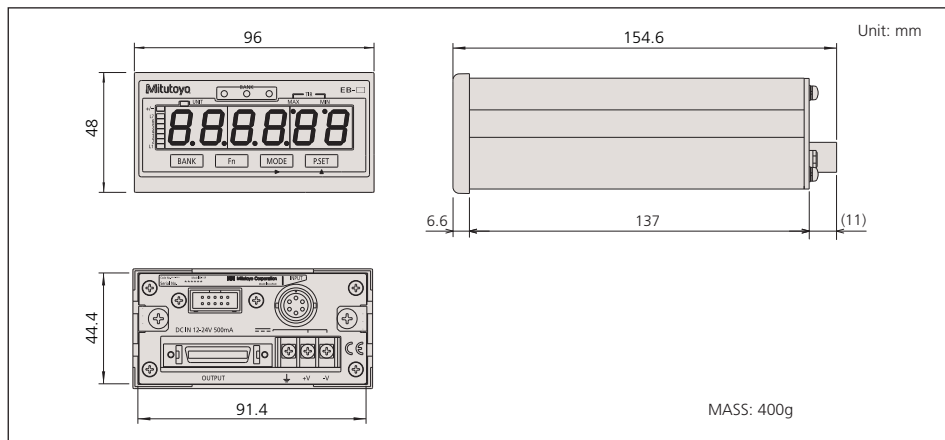

Function

Preset, tolerance judgment output (3/5-step X 7 kinds), limit value output (2 kinds independently for each of the 7 channels), peak (maximum, minimum, runout) measurement, diverse data output (serial BCD, simplified analog)

Output

Tolerance judgment: L1 to L5, open-collector
Control: Normal operation signal (NORMAL), open-collector

External control signal input

Preset, display hold, peak value clear, tolerance judgment BANK switch, open-collector or no-voltage contact signal (with/without contact point)

Interface

Serial BCD: Bit-serial format, open-collector
Analog output: 2.5V + Counting value X voltage resolution (25mV/2.5mV): Full-scale 0 to 5V

Digimatic input/output:

- Connecting to the external switch box (No. 02ADF180) makes it easy to enter tolerance limits and preset values. (Note) This can not be used when the gage is connected to a Mitutoyo DP-1VR Digimatic Mini-Processor
- Possible to connect with a Mitutoyo DP-1VR Digimatic Mini-Processor.
- Number of tolerance steps can be expanded by making a set of EB-D counters.

Quantization error

±1 count

Maximum input frequency

1.25MHz (The response speed depends on the gage being used.)
 The response speed depends on the gage being used. (542-093)

Power supply voltage

DC+12 to 24V

Power consumption

6W (500mA) or less (Secure power supply more than 1A for each unit.)

Optional Accessories

- 02ADB440:** I/O output connector
- 02ADF180:** 10-key unit
- 936937:** SPC cable (40"/1m)
- 965014:** SPC cable (80"/2m)
- 02ADD930:** Terminal block connecting cable
- 02ADN460:** AC adapter
- 02ZAA010:** Power cable



02ADB440

02ADN460

02ZAA010

EG Counter

SERIES 542 — Assembly Type Display Unit

Function

Preset, direction switch, tolerance judgment (3/5-step, 3 kinds), peak (max., min., runout) measurement, constant number, smoothing, error display/output, protection over keys

Output

Tolerance judgment: L1 to L5 (Switchover between open-collector output and BCD output by means of the parameter)

Control: NOM (normal signal) open-collector

BCD: 6-digit (positive/negative-true logic) open-collector (Switchover between tolerance judgment output by means of the parameter)

External control signal input

Preset, display hold, peak value clear, tolerance judgment BANK switch

Quantization error

±1 count

Maximum input frequency

1.25MHz (The response speed depends on the gage being used.)

Power supply voltage

DC+12 to 24V

Power consumption

6W (500mA) or less (Secure power supply more than 1A for each unit.)

Optional Accessories

02ADD930: Terminal connecting cable

02ADB440: I/O output connector

02ADN460: AC adapter

02ZAA010: Power cable



02ADB440

02ADN460

02ZAA010

FEATURES

- Possible to produce 3-step/5-step X 3 kinds of tolerance output and BCD output.
- The smoothing function can reduce the fluctuation of display digits.
- Employed the DIN size (96X48mm) and mount-on-panel configuration, which greatly facilitates the incorporation into a system.



542-015



542-016




542-017

SPECIFICATIONS

Model	EG-10P	EG-10Z	EG-10D
Order No.	542-015	542-017	542-016
Applicable input	Differential square-wave	Differential square-wave w/origin point mark	Digimatic code (SPC)
Applicable gage	LGK, LGF, LGB, LGE, LGM, LGH (excluding with origin point and sign wave types)	LGF with origin point mark	LGD, LGS
Number of gage input	1		
Resolution (Depending on the linear gage type connected)	.001", .0005", .0001", .00005", .00001", .000005" / 0.01mm, 0.005mm, 0.001mm, 0.0005mm, 0.0001mm		.001", .0005", .0001", .00005" / 0.01mm, 0.001mm
Tolerance judgment display	LED display (3 steps: Amber, Green, Red/5 steps: Amber, Amber flash, Green, Red flash, Red)		

DIMENSIONS AND MASS

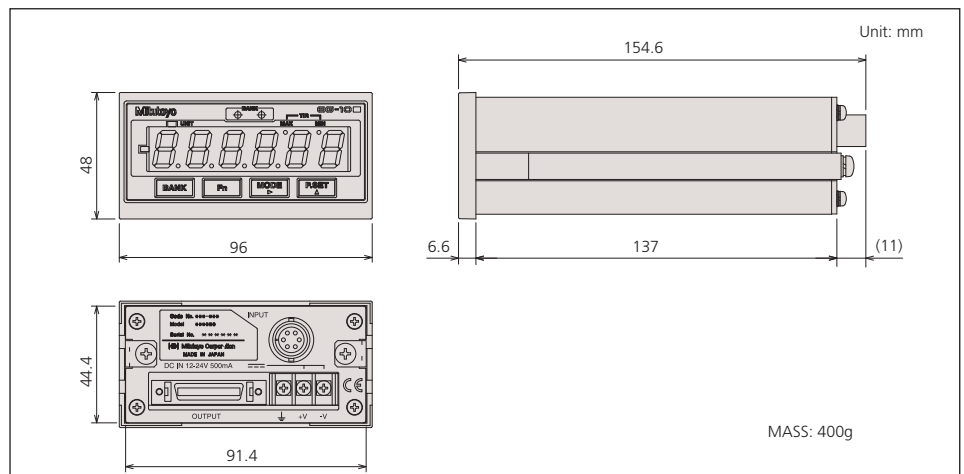

EH Counter

SERIES 542 — Multi-function Display Unit

FEATURES

- DIN compatible Panel-mounting type and DIN size (144 x 72mm). It can be easily incorporated into each system instrument.
- This counter can be used on a desktop by mounting it on the supplied stand leg.
- The standard RS-232C interface allows easy communication with an external PC.
- The RS Link function permits multiple EH counters (6 units maximum) to be

connected with daisy chain and data to be input/output from one channel of the terminal RS-232C interface.


- The maximum value, minimum value, and TIR (runout) measurements are possible.
- The 2-gage input type can perform 2-axis display and make addition or subtraction calculations between 2 gages.



SPECIFICATIONS

Model	EH-101P	EH-102P	EH-102Z	EH-102S	EH-102D
Order No.	542-075A	542-071A	542-073A	542-074A	542-072A
Applicable input	2.5MHz (Differential square-wave)			1MHz Differential sine-wave	Digimatic code SPC
Applicable gage	LGK, LGF with scale origin point mark, LGB, LGH (0.1um)		LGF with scale origin point mark, LGF 5um	LGH (0.01um)	LGD, LGS, ID
Number of gage input	1 (Single-display)	2 (Double-display)			
Resolution (Depending on the linear gage type connected)	.000005", .00005", .0005"/0.0001mm, 0.0005mm, 0.001mm, 0.005mm, 0.01mm			.000001"/0.1um, 0.01um	.0005" / 0.01mm
Mass	760g	800g	800g	900g	800g
Tolerance judgment display	LED display (3 step: Amber, Green, Red / 5 step: Amber, Amber flash, Green, Red flash, Red)				

DIMENSIONS

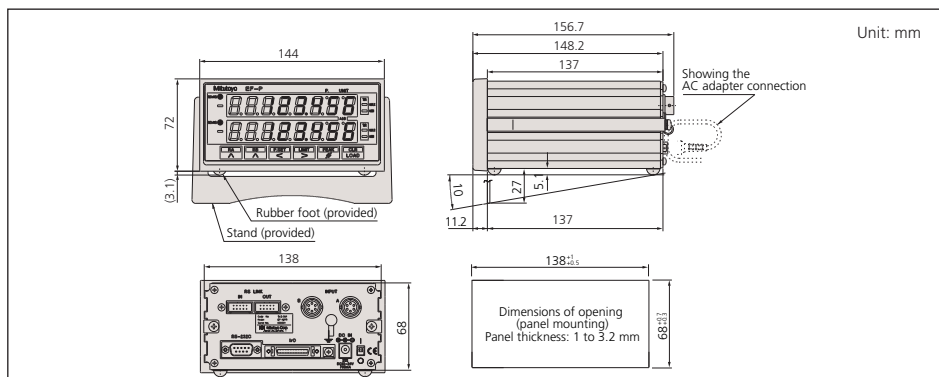

Function

Zerose, preset, limit setting (3 or 5-step), GO/±NG judgement, GO/±NG signal output, MAX/MIN/TIR (runout) measurement, counting direction switching, double reading, mm/inch switching, sum/difference calculation of 2 gages (542-071A, 542-073A, 542-074A, 542-072A only), output mode selection

Output

I/O: Tolerance judgment output (3/5 stages), normal operation output RS-232C or Digimatic code (selectable): Various measurement data

External Control

I/O: Preset, Data hold and Error clear RS-232C: Displayed value output, MAX/MIN/TIR switching, Zero set, peak value clear, preset value input, tolerance value input and error clear

RS Link

Up to six EH counters may be connected via one RS-232C port.(daisy chain)

Error display/output

Power-supply voltage error, overspeed error, overflow error, gage error, communication error, and tolerance setting error

Power supply:

Standard accessory
Via AC adaptor (12 - 24V DC, 700mA (max))

Optional Accessories

- 02ADB440: I/O output connector
- 02ADF180: 10-key unit
- 936937: SPC cable (40"/1m)
- 965014: SPC cable (80"/2m)
- 02ADD930: Terminal block connecting cable
- 02ADN460: AC adapter
- 02ZAA010: Power cable



EV Counter

SERIES 542 — For Multi-gage System

Function

GO/±NG judgment, GO/±NG signal output, MAX/MIN/TIR (runout) measurement, counting direction switching, mm/inch switching, calculation of sum, average, maximum, minimum and maximum difference between specified axes, and output-mode selection

Output

I/O: Normal operation output and GO/±NG signal (three steps), measurement data (BCD code), or 21-stage segment output (selectable) RS-232C: Various measurement data

External Control

I/O: Axis designation, preset, data hold, and error clear RS-232: Displayed value output command, MAX/MIN/TIR switching and peak value clear, zero set, preset value input, tolerance value input, error clear, and command to output calculated value between specified axes

RS Link

Up to 10 EV counters can be connected via a single RS-232 port. (daisy chain) EV and EH counters can be mixed (in which case a total of six counters can be connected).

Error display/output

Power-supply voltage error, overspeed error, overflow error, gage error, communication error, and tolerance setting error

Maximum input frequency

1.25MHz (differential square-wave): Max counting Speed : 5MHz

Power supply

Terminal block (M3 screws), DC +12 to +24V, 700mA (max.)

Optional Accessories

02ADB440: I/O output connector

02ADD400: D-EV (external display unit)

936937: RS link connector cable (40"/1m)

965014: RS link connector cable (80"/2m)

357651: AC adapter (must order 02ADD930 and 02AAA010)

02ADD930: Terminal connecting cable

02ADN460: AC adapter

02ZAA010: Power cable



FEATURES

- Up to six gages can be connected to one unit.
- Able to connect up to 10 EV counters to one personal computer using the RS link function to facilitate the configuration of a multi-point measurement system comprising a maximum of 60 gages.
- A range of output modes to choose from; I/O output for tolerance judgment and segment output, BCD data output and RS-232 output are available.
- Peak-hold measurements are possible for maximum value, minimum value, runout (TIR), etc.
- Able to calculate a sum, average, maximum, minimum, maximum difference, etc., between gages connected to the same unit.



542-063



542-064




542-067

SPECIFICATIONS


Model	EV-16P	EV-16Z	EV-16D
Order No.	542-063	542-067	542-064
Applicable input	Differential square-wave		Digimatic code (SPC)
Applicable gage	LGB (ex. 0.0001mm resolution), LGF, LGE, LG	LGF with origin point mark	LGD, LGD-M, LGS
Number of gage input	6		
Resolution (internal) - no display capability	.000005", .00005", .0005" / 0.0005mm, 0.001mm, 0.005mm, 0.01mm		.00005"* , .0005" / 0.001mm* , 0.01mm
Mass	910g	910g	830g

*: Will not be indicated when combined with a LG gage.

DIMENSIONS

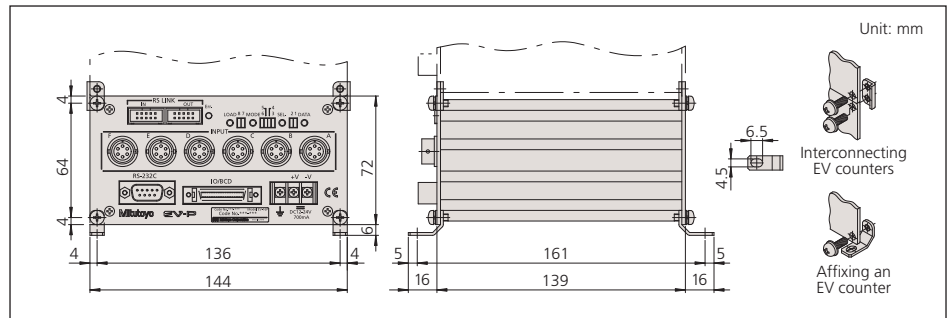

System Diagram

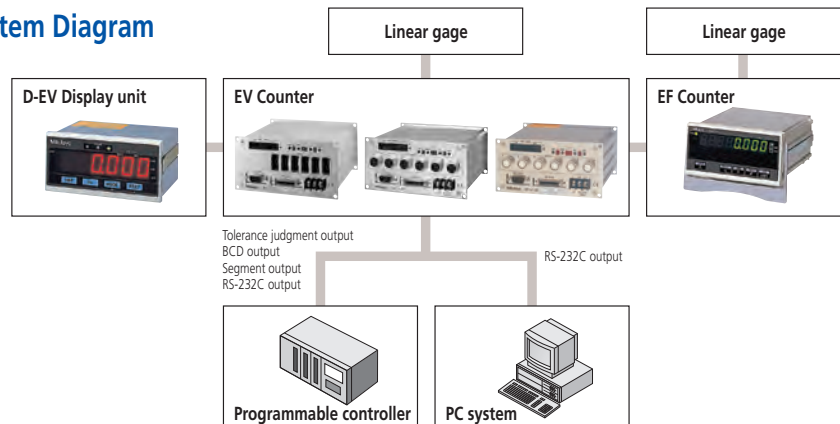

Mitutoyo

D-EV Display Unit

FEATURES

- Display unit for the EV counter.
- Using this display allows various settings for the EV counter without a personal computer or other equipment.
- Able to display each axis measurement value and GO/NG judgment result, total GO/NG judgment result for all axes, setting details, and errors.

SPECIFICATIONS


Model	D-EV
Order No.	02ADD400

- DIN compatible compact panel-mounting - cutout dimensions $45^{+0.8} \times 92^{+0.8}$
- The required power supply is DC +12 to +24V, 200mA (357651+02AAA010) at the terminal block (02ADD930).



02ADD400

DIMENSIONS AND MASS

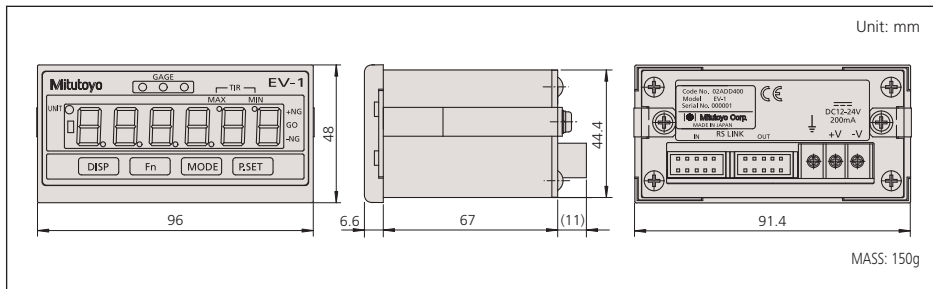

Unit: mm

MASS: 150g

SENSORPAK

This software facilitates the loading of measurement data from a linear gage counter with the RS-232C interface into user's personal computer.

FEATURES

- Maximum 60 channels of measuring points can be processed.
- Possible to perform arithmetical calculation and maximum width calculation using the measurement data.
- Possible to export the measurement data into MS-Excel.
- Diverse graphic functions (numeric value display, meter display, bar-graph display, overall judgment display)
- Frequency of data loading: Max. 9999 times (60ch) to 60000 times (6CH)

SPECIFICATIONS

Order No.	Description
54SAA622	Sensorpak



Mitutoyo Intelligent Computer Aided Technology

the standard in world metrology software

SENSOR



Technical Data

Number of connectable units: One display unit allows external display and setting for one EV counter.

Displayed digits: It uses a single sign plus six digits (EV counter operates on eight-digit data internally but displays only the last six digits).

LED display: Channel display (also for display of judgment result): 3 (three-color LED) Measurement mode display (current, maximum, minimum, and runout): 2 Status display: 1 (two-color)

Operating switches: 4

Switches and their functions: Channel switching, measurement mode switching (current value, maximum value, minimum value and runout), parameter setting, preset, and tolerance setting

Input/output: RS Link connectors: 1 in and 1 out.

Error display: Overspeed, gage error and others.

Power supply: Terminal block (M3 screws), DC +12 to +24V, 200mA

Optional Accessories

527428A: AC adapter (must order 02ADD930)

357651: AC adapter (must order 02ADD930 and 02AAA010)

02ADD930: Terminal connecting cable

02ADN460: AC adapter

02ZAA010: Power cable




02ADB440

02ADN460



02ZAA010

SENSORPAK



RS232C cable (option)

CPU: 2GH or faster
OS: Windows 2000 or XP
Memory: 256MB or more

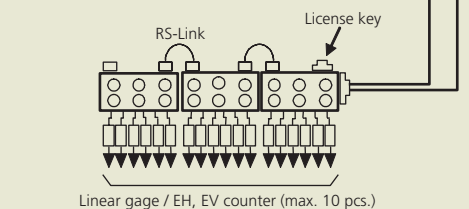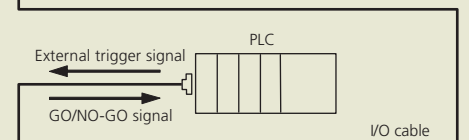

Litematic and Litematic Head

SERIES 318 — High-resolution Measuring Unit

Technical Data


Accuracy: Refer to the list of specifications.
(excluding quantizing error)
Resolution: Refer to the list of specifications.
Repeatability: $\sigma=0.05\mu\text{m}$
Display unit: 8 digits and 14mm character height
Stroke: 51.2mm (using standard contact point)
Measuring force: 0.01N: **318-221A**
0.15N: **318-222A**
1N: **318-223A**
0.01N: **318-226A**
0.15N: **318-227A**
1N: **318-228A**
Spindle feed speed: 2mm/s, 4mm/s, 8mm/s
Length standard: Photoelectric linear encoder
Contact point: $\phi 3\text{mm}$ carbide ball
Power supply: 85 - 264V AC

Optional Accessories


936937: SPC cable (1mm)
965014: SPC cable (2mm)
957460: 300x250mm granite stand with bracket for Litematic Head
101118: Contact point, Shell
120066: Contact point, $\phi 0.45\text{mm}$ needle (carbide)
120059: Contact point, $\phi 7.0\text{mm}$ spherical (carbide)
120060: Contact point, $\phi 10.5\text{mm}$ spherical (carbide)
937179T: Foot switch
264-504-5A: Digimatic Mini-processor DP-1VR
264-012-10: Input tool (for USB port)
02ADM260-2: SENSORPAK (data capture software w/ I/O cable)



* Digimatic output is to six significant figures.

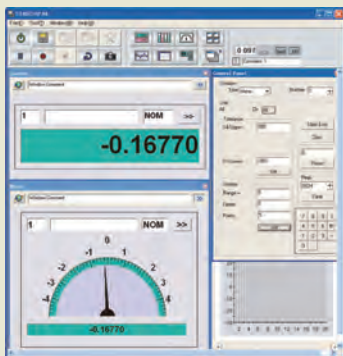

Applications

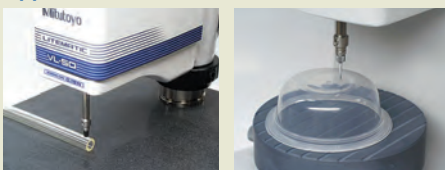

FEATURES

- The Litematic is designed for measuring easily-deformed workpieces and high-precision parts such as pin gages, thin-wall bearings, plastic parts, and springs.
- Extra-low measuring force of 0.01N (1gf).
- Super Litematic employs a unique Laser Holscale as the length standard, ensuring excellent measuring accuracy and repeatability.
- Ceramic anvil is free from corrosion and easy to maintain (Litematic).
- The measuring unit can be mounted onto fixtures or an optional stand to allow great flexibility of use (Litematic Head).
- Includes SPC output.



318-221A
Litematic



318-226A
Litematic Head

Shown with optional granite stand


SPECIFICATIONS

Range	Order No.	Resolution	Accuracy (at 20°C±1°C)**	Remarks
0 - 50mm	318-221A	0.01μm, 0.1μm, 1μm, 0.5μinch, 5μinch, 50μinch switchable	(0.5+L/100)μm L=Measured length (mm)	1 piece unit w/ $\phi 100\text{mm}$ grooved ceramic anvil
	318-222A			
	318-223A			
	318-226A			
	318-227A			
	318-228A			Separate Type

DIMENSIONS



Unit: mm

Litematic VL-50-B
318-221A
318-222A
318-223A

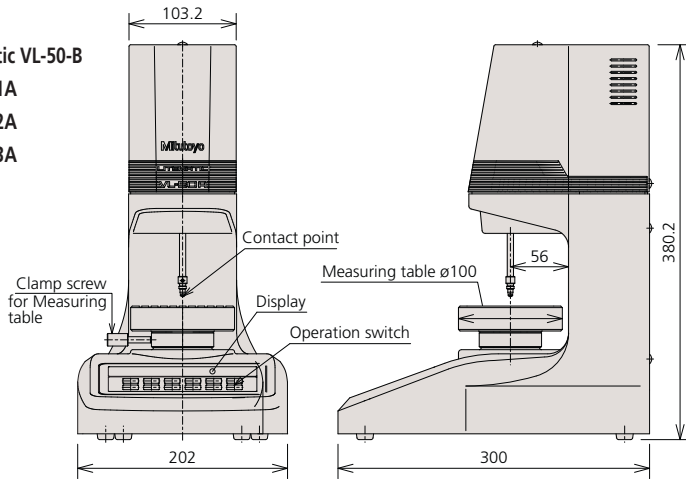


Interchangeable contact points

Unit: mm



Order No.	Measuring force
101118	0.02N



Order No.	Measuring force
120066	0.01N




Order.No.	Measuring force	D	d	SR
120059	0.03N	$\phi 7.5$	$\phi 6.5$	7
120060	0.06N	$\phi 10.5$	$\phi 9.5$	10

Litematic Head VL-50S-B

318-2226A
318-2227A
318-2228A

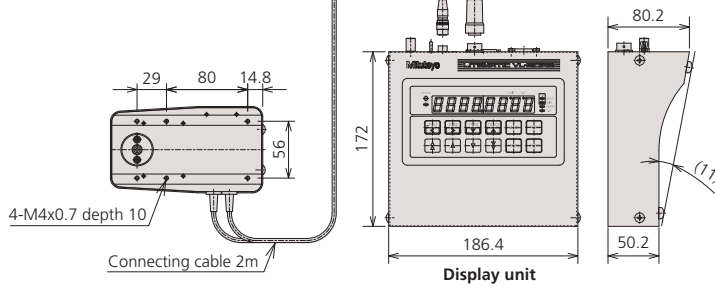

Optional stand for VL-50S-B: 957460

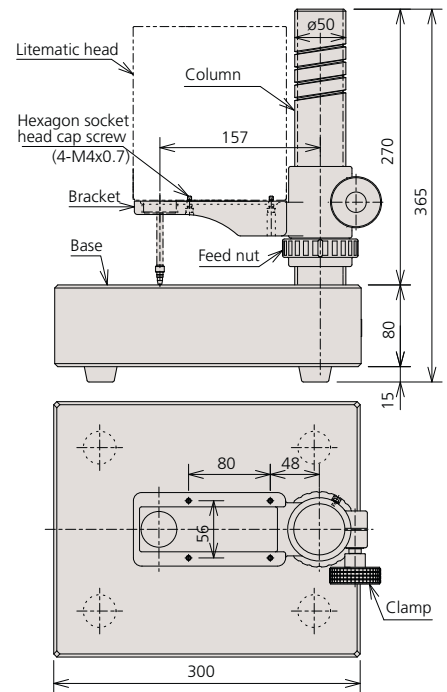



Laser Scan Micrometer Selection Guide

MEASURING UNITS

Appearance	Model	Laser Classification	Measuring range	Resolution (Selectable)
	LSM-902*	Visible (650nm), IEC Class 2/ FDA Class II	0.1 - 25mm (.004" - 1.0")	0.01μm - 10μm (.000001" - .0005")
	LSM-500S	Visible (650nm), IEC Class 2/ FDA Class II	0.005 - 2mm (.0002" - .08")	0.01μm - 10μm (.000001" - .0005")
	LSM-501S	Visible (650nm), IEC Class 2/ FDA Class II	0.05 - 10mm (.002" - .4")	0.01μm - 10μm (.000001" - .0005")
	LSM-503S	Visible (650nm), IEC Class 2/ FDA Class II	0.3 - 30mm (.012" - 1.18")	0.02μm - 100μm (.000001" - .005")
	LSM-506S	Visible (650nm), IEC Class 2/ FDA Class II	1 - 60mm (.04" - 2.36")	0.05μm - 100μm (.000002" - .005")
	LSM-512S	Visible (650nm), IEC Class 2/ FDA Class II	1 - 120mm (.04" - 4.72")	0.1μm - 100μm (.000005" - .005")
	LSM-516S	Visible (650nm), IEC Class 2/ FDA Class II	1 - 160mm (.04" - 6.30")	0.1μm - 100μm (.000005" - .005")
 With display unit	LSM-9506 Measuring unit - display unit one-piece structure for bench- top use only	Visible (650nm), IEC Class 2/ FDA Class II	0.5 - 60mm (.02" - 2.36")	0.05μm - 100μm (.000002" - .005")


DISPLAY UNITS

Appearance	Model	Type	Application	Interface units equipped
	LSM-6200 LSM-6900*	Multi-function type	Bench-top use	<ul style="list-style-type: none"> • RS-232C • I/O • Analog output
	LSM-5100**	Compact type (Low cost)	Assembly/ bench-top use (DIN size)	<ul style="list-style-type: none"> • RS-232C • I/O • Analog output


*LSM-902 and LSM-6900 are factory-set package.

**When connecting with the LSM-500S series, the scanning speed becomes 1600 scans/sec.


Laser Scan Micrometer




Enamel wire (Coated wire)
Cable
Spring wire
Tungsten wire
Pressure hose




Pins located in parallel




Gap of rollers




Rubber roller
Roller bearing
Motor shaft
Reference edge




*Using offset function



Optical fiber
Glass tube
*Only segment Nos. 1 and 2 can be used.




Tape
Belt
Bracket cable




Blade
*Using offset function

Dual-Unit Measurement:


By using an optional dual-type add on unit (02AGP150), one display unit can process the measurement data from two measuring units. e.g.) Two measurements with a single display unit



e.g.) XY measurement with a display unit $[X-Y \text{ or } (X + Y)/2]$



e.g.) Two laser units used to measure large diameter workpieces



Dual-Program Measurement:

Two measurement programs with different conditions are set, and can be performed at the same time. e.g.) Measurement of two dimensions



PROG. 0 (segment No. 2 is ON.) and PROG. 5 (segment No. 4 is ON.)



This LSM conforms to the US CDRH regulations in 21 CFR 1040.

Laser Scan Micrometer LSM-9506

SERIES 544 — Bench Top Type Non-contact Measuring System



LSM-9506

SPECIFICATIONS


Model	LSM-9506	
Order No.	544-116-1A	
Measuring range	.02 - 2.36" (0.5 - 60mm)	
Measuring area	.02 x 2.36" (5 x 60mm) (*1)	
Scanning Rate	1600/sec	
Resolution	.00002 to .005" (0.00005 to 0.1mm) [Selectable]	
Repeatability	± .00003" (±0.6μm) (±2 σ measuring rate: 0.32s)	
Accuracy	Linearity (*2) ± .0001" (±2.5μm) The optical axis direction ± .0001" (±2.5μm) The scanning direction ±(.00008+L/10000)" [L:inch] (*3) ±(2.0+L/10)μm [L:mm] (*3)	
Laser type	Visible semiconductor laser Wavelengths: 670nm Scanning speed: 8900"/s (226m/s)	
Display	Fluorescent display 16-digit+11-digit, guidance LEDs	Offset Setting and Mastering Reference Value Setting
Measuring function	Segment designation: 1 to 7 (1 to 3 for Transparent) 10 Program storage (PROG. 0 to PROG. 9) 255 Edge Designations can be detected Multi Limit GO/±NG Tolerance Judgment (up to 7 intervals) Dual-Axis LED Display	Automatic Workpiece Detection Dual-Gage Calibration Inch/mm Conversion Abnormal Data Elimination Dual Program Measurement Statistical Processing Workpiece Position display Foot-switch Connector
Data output standard	RS-232C, I/O Analog Interface, SPC	
Power Supply	AC 100V - 240V ±10% 50/60Hz 40VA	
Power Cord	930966	
Power Switch	Key switch use	
Operating Environment	32~104°F(0~40°C), 35 - 85% RH (without condensation)	

Optional Accessories

- 02AGD170:** Calibration gage set for LSM-9506
- 02AGD600B:** Thermal printer (w/120V AC adapter)

(*1): The area given by [measuring range on the optical axis] x [Measuring range in the scanning direction].
 (*2): Specified at the center of the measurement region.
 (*3): L=Deviation between the center of workpiece and the optical axis. (See fig. 1)

DIMENSIONS AND MASS

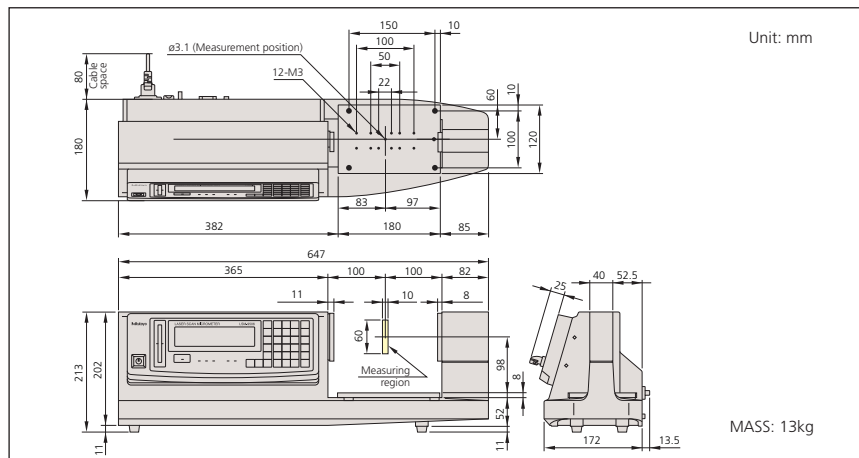

Laser Scan Micrometer LSM-902 / 6900

SERIES 544 — Ultra-high Accuracy Non-contact Measuring System



SPECIFICATIONS


LSM-902	
Measuring range	.004 - 1.0" (0.1 - 25mm)
Resolution	.000001 to .0005" (0.00001 to 0.01mm) [Selectable]
Repeatability* ¹	± .000002" (±0.05μm)* ²
Linearity* ¹	Whole range
	Small range
Positional error* ¹ * ⁵	± .000020" (±0.5μm)
Measuring region	± .6 x 1.0" (±1.5 x 25mm)* ⁶
Number of scans	800/sec
Laser wavelength	650nm [Visible LD], 1.5mW (peak)
Laser scanning speed	2240"/sec (56m/sec)
LSM-6900	
Display	Fluorescent display 16-digit + 11 digit, Guidance LEDs
Measuring function* ⁷	Segment designation
	Edge designation
	Averaging method
Scanning signal monitor connector	Provided as standard (with the plug)
Remote interlock connector	Provided as standard (with the plug)
Powerswitch	Key switch used
Built-in interface	RS-232C; Foot switch connector; I/O analog interface
Optional interface	DCU slot
	Expansion slot (1-slot)
Power supply	AC 100V - 240V±10%, 50/60Hz, 40VA

Optional Accessories

- 02AGD180: Calibration gage set for LSM-902/6900
- 02AGD270: Workstage
- 02AGD280: Adjustable workstage
- 02AGD600B: Thermal printer (w/120VAC adapter)

*¹ Accuracy inspection environment/Temperature 20°C±1°C, Humidity: 50%±10%.
 *² The repeatability is determined by the value for ±2σ- at the measurement interval of 1.28 sec.
 *³ Specified at the center of the measurement region.
 *⁴ ΔD: Diameter difference to master gage.
 *⁵ An error due to workpiece shift either in the optical axis direction or in the scanning direction.
 *⁶ The area given by [measuring range on the optical axis] x [measuring range in the scanning direction.]
 *⁷ The combination of functions is limited, details are described in the user's manual.

DIMENSIONS AND MASS

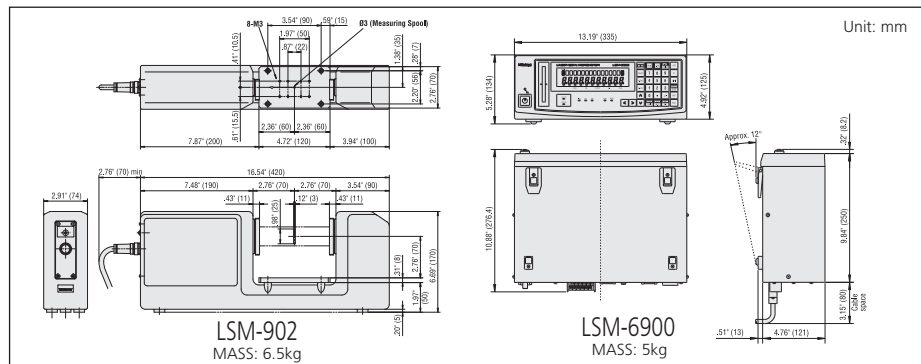

Laser Scan Micrometer LSM-500S

SERIES 544 — High Accuracy Non-contact Measuring System



544-532

Optional Accessories for LSM-500S

- 02AGD110:** Calibration gage set (ø0.1mm, ø2.0mm)
- 02AGD200:** Wire guiding pulley
- 02AGD220:** Air blow cover
- 957608:** Air cleaner for air blow cover
- 02AGN780A:** Extension signal cable 5m
- 02AGN780B:** Extension signal cable 10m
- 02AGN780C:** Extension signal cable 15m

SPECIFICATIONS

Model		LSM-500S
Order No.		544-532
Applicable display unit		LSM-6200
Laser Scanning Range	inch(mm)	Up to .49" (12.5mm) (Detecting regions are limited to about .4" (10mm) approx.)
Measuring range	inch(mm)	.0002 to .08" (0.005 to 2mm) .004 to .08" (0.1 to 2mm) [*1]
Resolution	inch(mm)	.00001 to .0005" (0.00001 to 0.01mm) [Selectable]
Repeatability [*2]	inch(μm)	±.0000012" (±0.03μm) [*3]
Linearity [*2]	inch(μm)	±.000012" (±0.3μm) [*4]
Positional error [*2][*5]	inch(μm)	±.000016" (±0.4μm)
Measuring region	inch(mm)	.04 x .08" (1 x 2mm) [Optical axis direction x Scanning direction]
Number of scans for averaging	scan	16 to 2048 [*6]
Laser classification		Class 2 (Max. Output: 1.3mW with a scanning laser, semiconductor laser; wavelength 650nm)
Number of laser scans	/sec	3200
Laser scanning rate	inch/sec (m/sec)	2992"/sec (76m/sec)
Protection level		IP64
Operation environment	Temperature	0°C to 40°C
	Humidity	35%RH to 85%RH [without condensation]
	Altitude	2000m or less
Storage environment	Temperature	-15°C to 55°C
	Humidity	35%RH to 85%RH [without condensation]

*[1]: Measuring range available when set to "No extra-fine wire measurement" or "Edge specification" in the basic setup mode.

*[2]: Environment for accuracy validation: 20°C ± 1°C temperature; 50% ± 10% humidity.


*[3]: The value of ±2σ with a 2mm-diameter gage has been measured for two minutes with a measurement interval of 0.32 seconds, where σ is the standard deviation.

*[4]: The value of measurements in the center of the measurement region.

*[5]: Error due to the positional shift of the workpiece in the optical axis direction or scanning direction.

*[6]: Averaging scans between 1 and 8 times can be made if "No extra-fine wire measurement" is specified in the basic setup mode. The measuring range, however, is limited to 0.1mm to 2mm in this case.

DIMENSIONS AND MASS

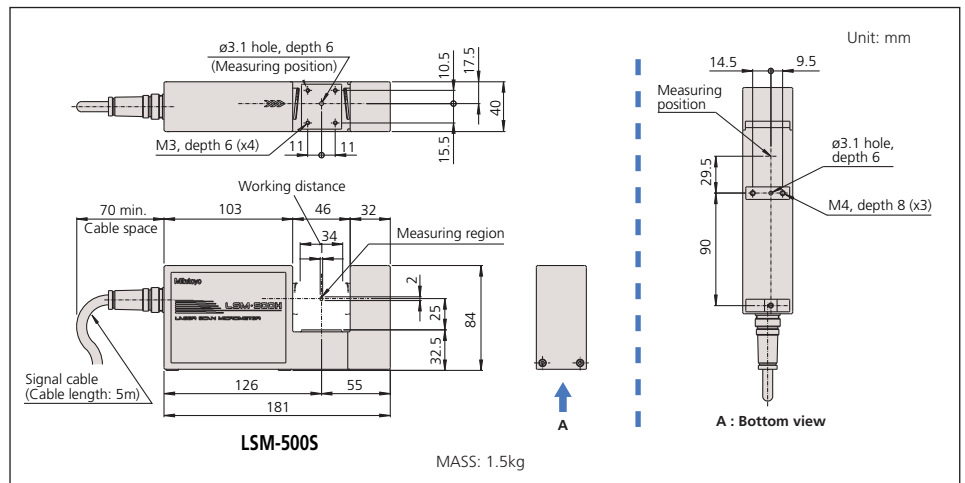

Laser Scan Micrometer LSM-501S

SERIES 544 — High Accuracy Non-contact Measuring System



544-534

SPECIFICATIONS

Model		LSM-501S
Order No.		544-534
Applicable display unit		LSM-6200
Laser Scanning Range	inch(mm)	Up to .74" (19mm)
Measuring range	inch(mm)	.002 to .4" (0.05 to 10mm)
Resolution	inch(mm)	.000001 to .0005" (0.00001 to 0.01mm) [Selectable]
Repeatability [*1]	inch(μm)	±.0000016" (±0.04μm) [*2]
Linearity [*1]	Whole range	inch(μm) ±.00002" (±0.5μm) [*3]
	Narrow measuring range	μm ±(0.3 + 0.1 ΔD) ———— [*3][*4] inch ±(.000012" + .000004" ΔD)
Positional error [*1][*5]	inch(μm)	±.00002" (±0.5μm)
Measuring region	inch(mm)	.08 × .4" (2 × 10mm) (Measuring region: .002 to .004" (0.05 to 0.1mm)) .16 × .4" (4 × 10mm) (Measuring region: .004 to .4" (0.1 to 10mm)) [Optical axis direction × Scanning direction]
Number of scans for averaging	scan	1 to 2048
Laser classification		Class 2 (Max. Output: 1.3mW with a scanning laser, semiconductor laser: wavelength 650nm)
Number of laser scans	/sec	3200
Laser scanning rate	inch/sec (m/sec)	4449"/sec (113m/sec)
Protection level		IP64
Distance between the laser emission unit and reception unit	inch(mm)	Standard 2.68" (68mm) Max. 3.93" (100mm) [*6]
Operation environment	Temperature	0°C to 40°C
	Humidity	35%RH to 85%RH [without condensation]
	Altitude	2000m or less
Storage environment	Temperature	-15°C to 55°C
	Humidity	35%RH to 85%RH [without condensation]

[*1] Environment for accuracy validation: 20°C ± 1°C temperature; 50% ± 10% humidity.

[*2] A value of ±2 with a 10mm-diameter gage has been measured for two minutes with a measurement interval of 0.32 seconds, where σ is the standard deviation.

[*3] The value of measurements in the center of the measurement region.

[*4] ΔD is the difference in diameter of the workpiece and the master gage.


[*5] Error due to the positional shift of workpiece in optical axis direction or scanning direction.

[*6] The distance between the laser emission unit and reception unit other than the standard, may affect the accuracy.

Optional Accessories for LSM-501S

- 02AGD120:** Calibration gage set (ø0.1mm, ø10mm)
 - 02AGD210:** Wire guiding pulley
 - 02AGD400:** Adjustable workstage
 - 02AGD440:** Center support*
 - 02AGD450:** Adjustable V-block*
 - 02AGD230:** Air blow cover
 - 957608:** Air cleaner for air blow cover
 - 02AGC150A:** Extension relay cable 1m
 - 02AGN780A:** Extension signal cable 5m
 - 02AGN780B:** Extension signal cable 10m
 - 02AGN780C:** Extension signal cable 15m
- *Use with an adjustable workstage.

DIMENSIONS AND MASS

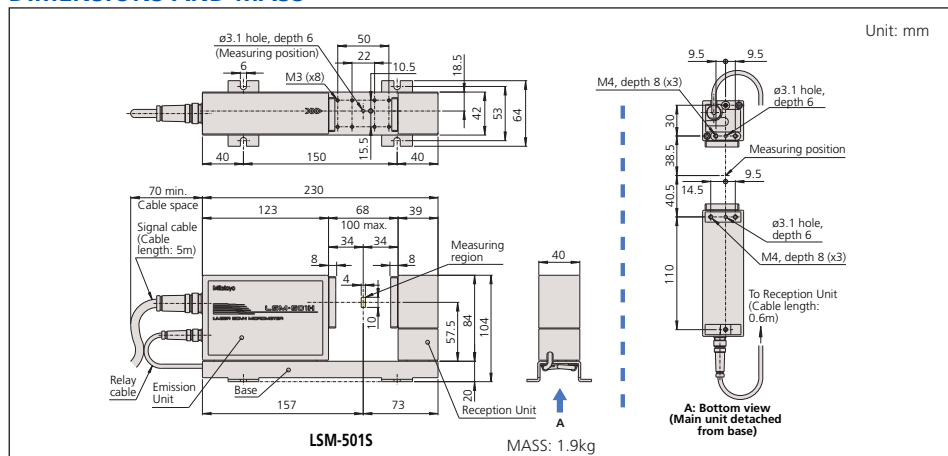

Laser Scan Micrometer LSM-503S

SERIES 544 — High Accuracy Non-contact Measuring System



SPECIFICATIONS


Model		LSM-503S	
Order No.		544-536	
Applicable display unit		LSM-6200	
Laser Scanning Range	inch(mm)	Up to 1.3" (34mm)	
Measuring range	inch(mm)	.012 to 1.18" (0.3 to 30mm)	
Resolution	inch(mm)	.000001 to .005" (0.00002 to 0.1mm) [Selectable]	
Repeatability [*1]	inch(μm)	±.0000044" (±0.11μm) [*2]	
Linearity [*1]	Whole range	inch(μm)	±.00004" (±1.0μm) [*3]
	Narrow measuring range	μm	±(0.6 + 0.1 ΔD) [3][*4]
	inch	±(.000024" + .000004" ΔD)	
Positional error [*1][*5]	inch(μm)	±.00006" (±1.5μm)	
Measuring region	inch(mm)	.08 x .4" (2 x 10mm) (Measuring region: .002 to .004" (0.05 to 0.1mm))	
		.16 x .4" (4 x 10mm) (Measuring region: .004 to .4" (0.1 to 10mm))	
		[Optical axis direction x Scanning direction]	
Number of scans for averaging	scan	1 to 2048	
Laser classification		Class 2 (Max. Output: 1.3mW with a scanning laser, semiconductor laser: wavelength 650nm)	
Number of laser scans	/sec	3200	
Laser scanning rate	inch (m/sec)	4449"/sec (113m/sec)	
Protection level		IP64	
Distance between the laser emission unit and reception unit	inch(mm)	Standard 5.12" (130mm)	
		Max. 13" (350mm) [*6]	
Operation environment	Temperature	0°C to 40°C	
	Humidity	35%RH to 85%RH [without condensation]	
	Altitude	2000m or less	
Storage environment	Temperature	-15°C to 55°C	
	Humidity	35%RH to 85%RH [without condensation]	

Optional Accessories for LSM-503S

- 02AGD130: Calibration gage set (ø1mm, ø30mm)
 - 02AGD490: Adjustable workstage
 - 02AGD440: Center support*
 - 02AGD450: Adjustable V-block*
 - 02AGD240: Air blow cover
 - 957608: Air cleaner for air blow cover
 - 02AGC150A: Extension relay cable 1m
 - 02AGC150B: Extension relay cable 3m
 - 02AGC150C: Extension relay cable 5m
 - 02AGN780A: Extension signal cable 5m
 - 02AGN780B: Extension signal cable 10m
 - 02AGN780C: Extension signal cable 15m
 - 02AGN780D: Extension signal cable 20m
- *Use with an adjustable workstage.

- *[1] Environment for accuracy validation: 20°C ± 1°C temperature; 50% ± 10% humidity.
- *[2] A value of ±2 with a 10mm-diameter gage has been measured for two minutes with a measurement interval of 0.32 seconds, where σ is the standard deviation.
- *[3] The value of measurements in the center of the measurement region.
- *[4] ΔD is the difference in diameter of the workpiece and the master gage.
- *[5] Error due to the positional shift of workpiece in optical axis direction or scanning direction.
- *[6] The distance between the laser emission unit and reception unit other than the standard, may affect the accuracy.

DIMENSIONS AND MASS

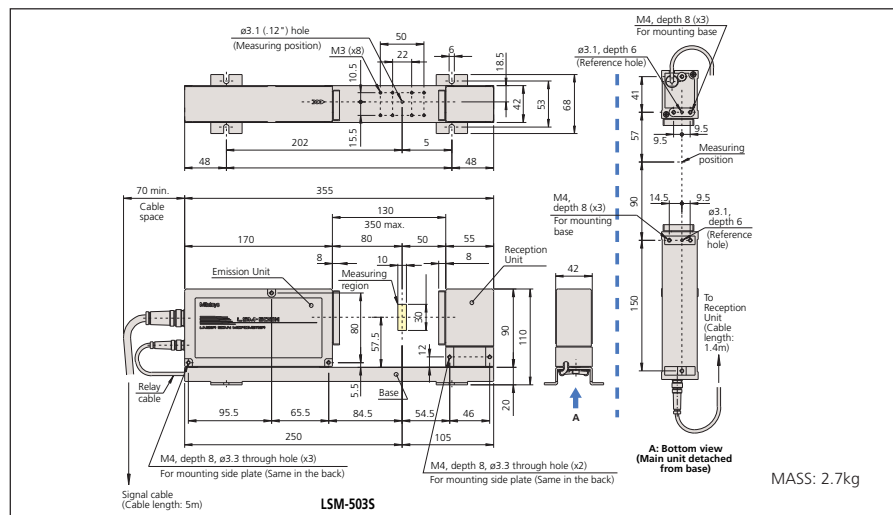

Laser Scan Micrometer LSM-506S

SERIES 544 — High Accuracy Non-contact Measuring System



SPECIFICATIONS

Model		LSM-506S	
Order No.		544-538	
Applicable display unit		LSM-6200	
Laser Scanning Range	inch(mm)	Up to 2.6" (66mm)	
Measuring range	inch(mm)	.04 to 2.36" (1 to 60mm)	
Resolution	inch(mm)	.000002 to .005" (0.00005 to 0.1mm) [Selectable]	
Repeatability [*1]	inch(μm)	±.000014" (±0.36μm) [*2]	
Linearity [*1]	Whole range	inch(μm)	±.00012" (±3.0μm) [*3]
	Narrow measuring range	μm	±(1.5 + 0.5 ΔD) [3][*4]
	inch	±(.00012" + .00002" ΔD)	
Positional error [*1][*5]	inch(μm)	±.00016" (±4.0μm)	
Measuring region	inch(mm)	.8 x 2.36" (20 x 60) [Optical axis direction × Scanning direction]	
Number of scans for averaging	scan	1 to 2048	
Laser classification		Class 2 (Max. Output: 1.3mW with a scanning laser, semiconductor laser: wavelength 650nm)	
Number of laser scans	/sec	3200	
Laser scanning rate	inch/sec (m/sec)	17795"/sec (452m/sec)	
Protection level		IP64	
Distance between the laser emission unit and reception unit	inch(mm)	Standard 10.75" (273mm) Max. 27" (700mm) [*6]	
Operation environment	Temperature	0°C to 40°C	
	Humidity	35%RH to 85%RH [without condensation]	
	Altitude	2000m or less	
Storage environment	Temperature	-15°C to 55°C	
	Humidity	35%RH to 85%RH [without condensation]	

[*1] Environment for accuracy validation: 20°C ± 1°C temperature; 50% ± 10% humidity.

[*2] A value of ±2σ with a 60mm-diameter gage has been measured for two minutes with a measurement interval of 0.32 seconds, where σ is the standard deviation.

[*3] The value of measurements in the center of the measurement region.

[*4] ΔD is the difference in diameter of the workpiece and the master gage.

[*5] Error due to the positional shift of workpiece in optical axis direction or scanning direction.


[*6] The distance between the laser emission unit and reception unit other than the standard, may affect the accuracy.

Optional Accessories for LSM-506S

- 02AGD140:** Calibration gage set (ø1mm, ø60mm)
- 02AGD520:** Adjustable workstage
- 02AGD580:** Center support*
- 02AGD590:** Adjustable V-block*
- 02AGD250:** Air blow cover
- 957608:** Air cleaner for air blow cover
- 02AGC150A:** Extension relay cable 1m
- 02AGC150B:** Extension relay cable 3m
- 02AGC150C:** Extension relay cable 5m
- 02AGN780A:** Extension signal cable 5m
- 02AGN780B:** Extension signal cable 10m
- 02AGN780C:** Extension signal cable 15m
- 02AGN780D:** Extension signal cable 20m

*Use with an adjustable workstage.

DIMENSIONS AND MASS

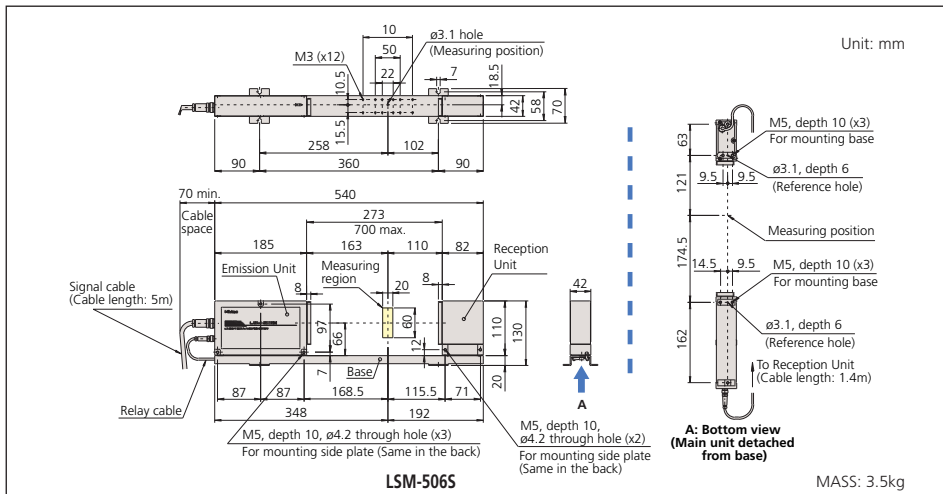

Laser Scan Micrometer LSM-512S

SERIES 544 — High Accuracy Non-contact Measuring System



544-540

Optional Accessories for LSM-512S

- 02AGD150:** Calibration gage set (ø20mm, ø120mm)
- 02AGD260:** Air blow cover
- 957608:** Air cleaner for air blow cover
- 02AGC150A:** Extension relay cable 1m
- 02AGC150B:** Extension relay cable 3m
- 02AGC150C:** Extension relay cable 5m
- 02AGN780A:** Extension signal cable 5m
- 02AGN780B:** Extension signal cable 10m
- 02AGN780C:** Extension signal cable 15m
- 02AGN780D:** Extension signal cable 20m

SPECIFICATIONS

Model		LSM-512S	
Order No.		544-540	
Applicable display unit		LSM-6200	
Laser Scanning Range	inch(mm)	Up to 5.0" (126mm)	
Measuring range	inch(mm)	.04 to 4.72" (1 to 120mm)	
Resolution	inch(mm)	.00005 to .005" (0.0001 to 0.1mm) [Selectable]	
Repeatability [*1]	inch(μm)	±.000033" (±0.85μm) [*2]	
Linearity [*1]	Whole range	inch(μm)	±.00024" (±6.0μm) [*3]
	Narrow measuring range	μm	±(4.0 + 0.5 ΔD) ————— [*3][*4]
	inch	±(.00016" + .00002" ΔD)	
Positional error [*1][*5]	inch(μm)	±.0003" (±8.0μm)	
Measuring region	inch(mm)	1.2 x 4.72" (30 x 120) [Optical axis direction x Scanning direction]	
Number of scans for averaging	scan	1 to 2048	
Laser classification		Class 2 (Max. Output: 1.3mW with a scanning laser, semiconductor laser: wavelength 650nm)	
Number of laser scans	/sec	3200	
Laser scanning rate	inch/sec (m/sec)	35590"/sec (904m/sec)	
Protection level		IP64	
Distance between the laser emission unit and reception unit	inch(mm)	Standard 12.64" (321mm)	
		Max. 27" (700mm) [*6]	
Operation environment	Temperature	0°C to 40°C	
	Humidity	35%RH to 85%RH [without condensation]	
	Altitude	2000m or less	
Storage environment	Temperature	-15°C to 55°C	
	Humidity	35%RH to 85%RH [without condensation]	

*[1] Environment for accuracy validation: 20°C ± 1°C temperature; 50% ± 10% humidity.

*[2] A value of ±2σ with a 120mm-diameter gage has been measured for two minutes with a measurement interval of 0.32 seconds, where σ is the standard deviation.


*[3] The value of measurements in the center of the measurement region.

*[4] ΔD is the difference in diameter of the workpiece and the master gage.

*[5] Error due to the positional shift of workpiece in optical axis direction or scanning direction.

*[6] The distance between the laser emission unit and reception unit other than the standard, may affect the accuracy.

DIMENSIONS AND MASS

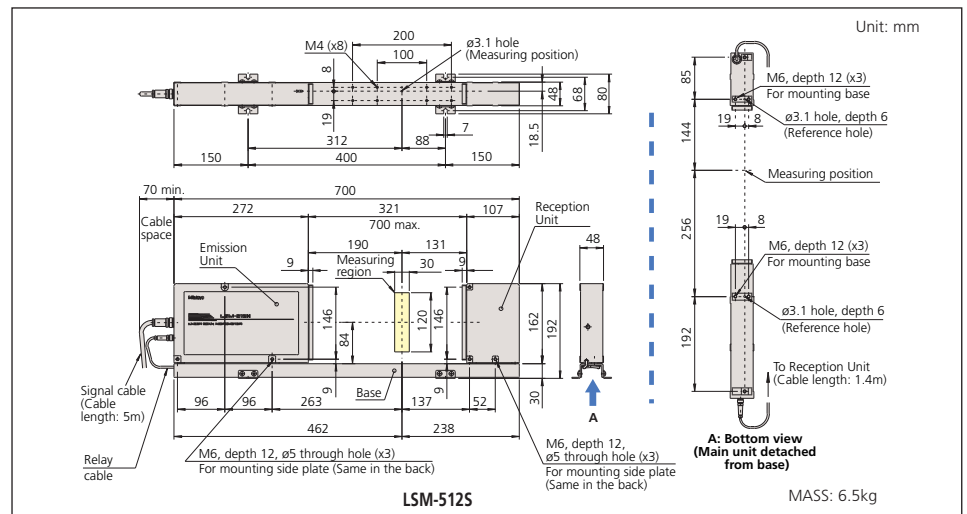

Laser Scan Micrometer LSM-516S

SERIES 544 — High Accuracy Non-contact Measuring System



SPECIFICATIONS

Model		LSM-516S	
Order No.		544-542	
Applicable display unit		LSM-6200	
Laser Scanning Range	inch(mm)	Up to 6.7" (170mm)	
Measuring range	inch(mm)	.04 to 6.3" (1 to 160mm)	
Resolution	inch(mm)	.000005 to .005" (0.0001 to 0.1mm) [Selectable]	
Repeatability [*1]	inch(μm)	±.000055" (±1.4μm) [*2]	
Linearity [*1]	Whole range	inch(μm)	±.00028" (±7.0μm) [*3]
	Narrow measuring range	μm	±(4.0 + 2.0 ΔD) [3][*4]
	inch	±(.00016" + .000079" ΔD)	
Positional error [*1][*5]	inch(μm)	±.0003" (±8.0μm)	
Measuring region	inch(mm)	1.57 x 6.3" (40 x 160) [Optical axis direction x Scanning direction]	
Number of scans for averaging	scan	1 to 2048	
Laser classification		Class 2 (Max. Output: 1.3mW with a scanning laser, semiconductor laser: wavelength 650nm)	
Number of laser scans	/sec	3200	
Laser scanning rate	inch/sec (m/sec)	47480"/sec (1206m/sec)	
Protection level		IP64	
Distance between the laser emission unit and reception unit	inch(mm)	Standard 15.74" (400mm) Max. 32.72" (800mm) [*6]	
Operation environment	Temperature	0°C to 40°C	
	Humidity	35%RH to 85%RH [without condensation]	
	Altitude	2000m or less	
Storage environment	Temperature	-15°C to 55°C	
	Humidity	35%RH to 85%RH [without condensation]	

[*1] Environment for accuracy validation: 20°C ± 1°C temperature; 50% ± 10% humidity.

[*2] A value of ±2σ with a 160mm-diameter gage has been measured for two minutes with a measurement interval of 0.32 seconds, where σ is the standard deviation.


[*3] The value of measurements in the center of the measurement region.

[*4] ΔD is the difference in diameter of the workpiece and the master gage.

[*5] Error due to the positional shift of workpiece in optical axis direction or scanning direction.

[*6] The distance between the laser emission unit and reception unit other than the standard, may affect the accuracy.

DIMENSIONS AND MASS

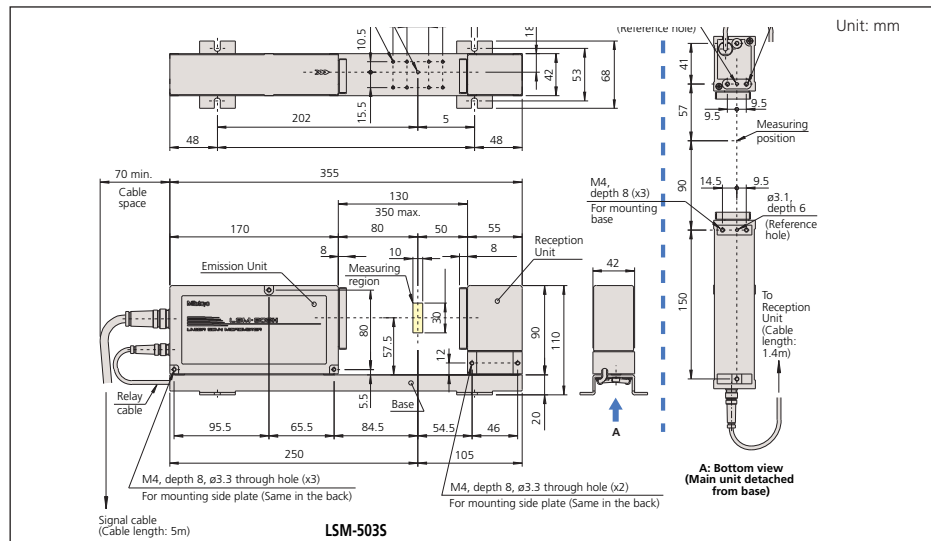

Optional Accessories for LSM-516S

002AGM300: Calibration gage set (ø20mm, ø160mm)

02AGC150A: Extension relay cable 1m

02AGC150B: Extension relay cable 3m

02AGC150C: Extension relay cable 5m

02AGN780A: Extension signal cable 5m

02AGN780B: Extension signal cable 10m

02AGN780C: Extension signal cable 15m

02AGN780D: Extension signal cable 20m

LSM-5200 Display Unit

SERIES 544 — Compact Display Unit for Real-time Multi-channel Measurement

Technical Data

Main display: 9-digit LED
 Interface units equipped: RS-232C, Analog I/O, Foot switch
 Power supply: +24V DC±10%, 1A

Function of Display Unit

Zero-setting, presetting, GO/±NG judgment, Offset value setting, Sample measurement, Statistical calculation, Data output, Workpiece position display, mm/inch switching, Dual-gage calibration, Transparent object measurement, Automatic measurement, Abnormal data eliminating

FEATURES


- Panel-mount type (with dimensions conforming to DIN standards) allows easy system integration.
- Capable of calculating mean, maximum, minimum, and range (maximum - minimum).
- Either the segment measurement (7 segments max.) or edge measurement (1 to 255 edges) can be selected.
- The RS-232C interface and the I/O and analog interface are provided as standard.

- The arithmetical average or moving average can be selected.
- GO/±NG judgment function.



544-047

DIMENSIONS

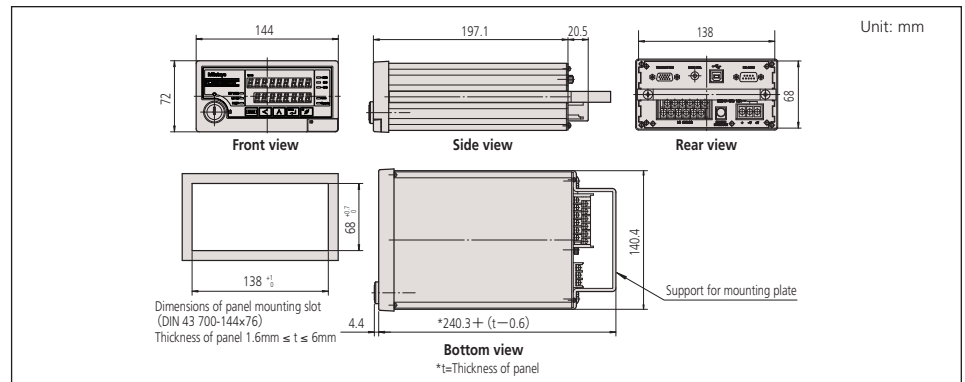

Technical Data


Main display: 16-digit fluorescent tube
 Interface units equipped: RS-232C, Analog I/O, Foot switch
 Power supply: 100 - 240V AC±10%, 40VA, 50/60Hz

Function of Display Unit

Zero-setting, Presetting, GO/±NG judgment, Multi-limit judgment, Offset value setting, Sample measurement, Statistical calculation, Group judgment, Data output, Workpiece position display, mm/inch switching, Dual-gage calibration, Transparent object measurement, Dual-unit measurement (optional), Automatic measurement, Abnormal data eliminating

QUICKTOOL

QUICKTOOL is a free software program that makes programming the LSM-6200 quick and easy. Please contact your Mitutoyo office for more information.

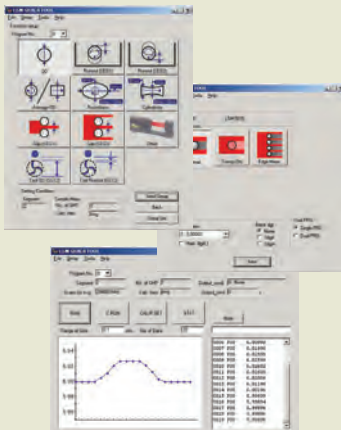

LSM-6200 Display Unit

SERIES 544 — Standard Display Unit for Laser Scan Micrometer

FEATURES

- With a dual-display design setup values can be continuously monitored. Also, two measurement value items can be displayed on the sub-display with the simultaneous measurement function.
- Either the segment measurement (7 segments max.) or edge measurement (1 to 255 edges) can be selected.

- The RS-232C interface and the I/O and analog interface are provided as standard.
- A statistical calculation function and abnormal data eliminating function are provided.




544-072A (Inch/Metric)

SPECIFICATIONS






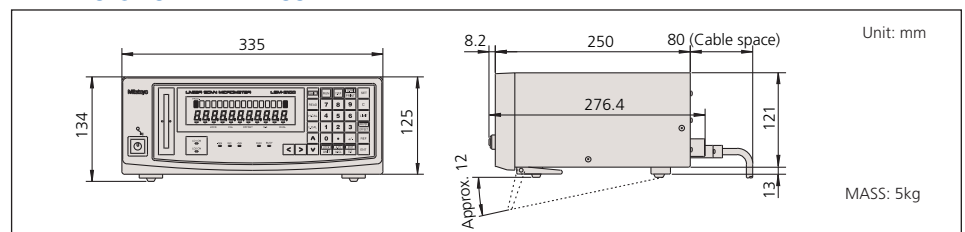


Model	LSM-6200
Order No.	544-072A

DIMENSIONS AND MASS

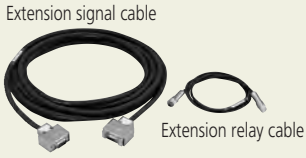

Mitutoyo

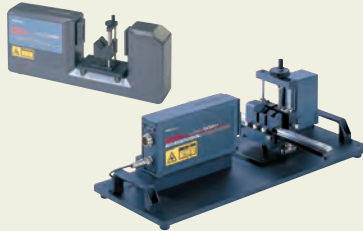Optional Accessories for LSM

Appearance	Order No.	Description	Application
	02AGD110 02AGD120 02AGD180 02AGD130 02AGD140 02AGD150 02AGM300 02AGD170	Calibration gage set Calibration gage set Calibration gage set Calibration gage set Calibration gage set Calibration gage set Calibration gage set Calibration gage set	LSM-500S LSM-501S LSM-902 LSM-503S LSM-506S LSM-512S LSM-516S LSM-9506
	02AGP150	Dual-type add-on unit	LSM-6200
	02AGC840 02AGC880 02AGC910 02AGC940	Digimatic (SPC) codeout unit 2nd I/O & analog interface unit BCD interface unit GP-IB interface unit	LSM-6200/6900 LSM-6200/6900 LSM-6200/6900 LSM-6200/6900
	02AGN780A 02AGN780B 02AGN780C 02AGN780D 02AGC150A 02AGC150B 02AGC150C	Extension signal cable (5m) Extension signal cable (10m) Extension signal cable (15m) Extension signal cable (20m) Extension relay cable (1m) Extension relay cable (3m) Extension relay cable (5m)	Any model of LSM* Any model of LSM* Any model of LSM* Any model of LSM* Any model of LSM** Any model of LSM** Any model of LSM**
	936937	SPC cable (1m)	LSM-6200/6900/9506
	937179T	Footswitch	LSM-6200/6900/9506
	02AGD270 02AGD400 02AGD280 02AGD490 02AGD520 02AGD370 02AGD680 02AGD440 02AGD580 02AGD450 02AGD590	Work stage Adjustable workstage Adjustable workstage Adjustable workstage Adjustable workstage Adjustable workstage Adjustable workstage Center support Center support Adjustable V-block Adjustable V-block	LSM-501S/503S/902 LSM-501S LSM-902 LSM-503S LSM-506S LSM-9506 LSM-9506 LSM-501S/503S/902 LSM-506S/9506 LSM-501S/503S/902 LSM-506S/9506
	02AGD200 02AGD210	Wire guiding pulley Wire guiding pulley	LSM-500S LSM-501S
	02AGD220 02AGD230 02AGD240 02AGD250 02AGD260 957608	Air blow cover Air blow cover Air blow cover Air blow cover Air blow cover Air cleaner	LSM-500S LSM-501S LSM-503S LSM-506S LSM-512S Any model of LSM
	02AGD600B	Thermal printer (120V AC)	Any model of LSM

* Except for LSM-902
** Except LSM-500S/902

Laser Scan Micrometer

Application Example

- Drill / End mill (Odd-number teeth)
outer-diameter standard function at
LSM-6200 Display Unit

