



NEW WAY SPINDLE BEARINGS – T-SERIES

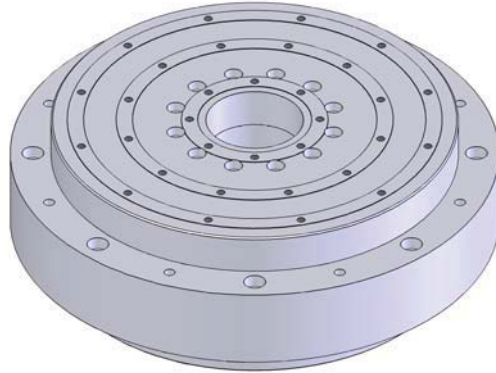

DIMENSIONS

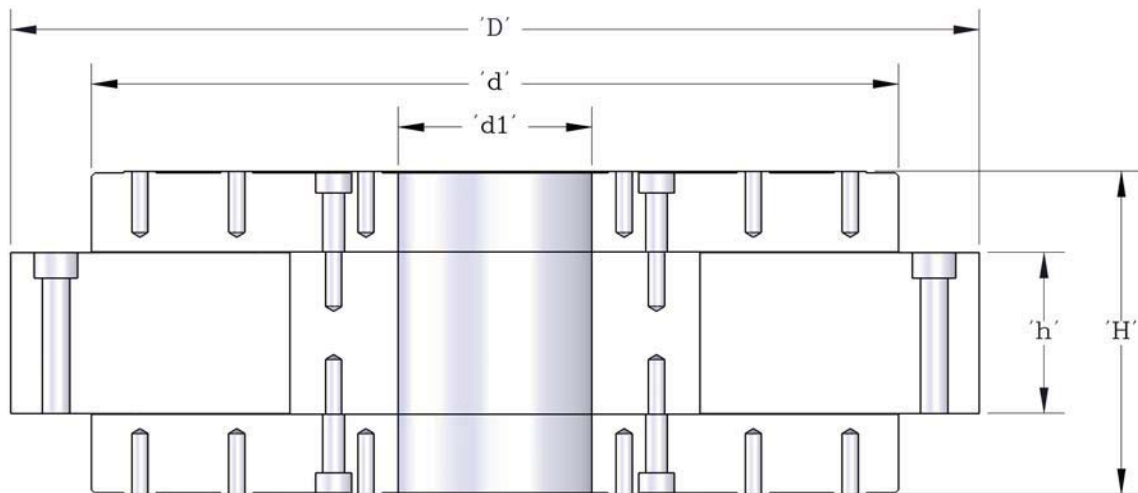

PART NUMBER	DIMENSIONS					IDEAL LOAD		AXIAL AND RADIAL ERROR MOTION (uM)	MAX. SPEED (RPM)
	'D' (MM)	'd' (MM)	d1' (MM)	'H' (MM)	'h' (MM)	AXIAL (N)	RADIAL (N)		
SS- 50	100	50	12	20	10	91	48	0.1	21739
SS- 75	125	75	18	30	15	286	117	0.1	13274
SS- 100	150	100	24	40	20	585	216	0.1	9554
SS- 150	200	150	36	60	30	1495	513	0.1	6048
SS- 250	300	250	60	100	50	4562	1493	0.2	3460
SS- 375	435	375	90	150	75	10735	3457	0.4	2242
SS- 500	560	500	120	200	100	19508	6232	0.6	1657
SS- 750	810	750	180	275	150	44852	14217	0.8	1090