


Sunnex SM Anti-vibration mount


Facts


THE PROPERTY OF THE PARTY OF TH

- Withstands loads up to 3400 kg per machine mount
- Square pressure plate made from special grade cast iron that rests on an integrated nitrile rubber damping pad
- Can be combined with a wide variety of levelling bolts




Sunnex SM comprises a square cast iron pressure plate that rests on a Sunnex SP 714 pad that withstand most types of grease, acid, oil and cooling emulsion normally used in industry. Sunnex SM can be combined with a wide variety of galvanized levelling bolts of different lengths (see the table on the right).






Model	Load area per mount daN (kg)	L mm	B mm	H mm	Part no.
SM 61	275–575	83	83	26	46002
SM 62	600-1500	123	123	28	46004
SM 63	900-2400	148	148	30	46006
SM 64	1200-3400	173	173	32	46008

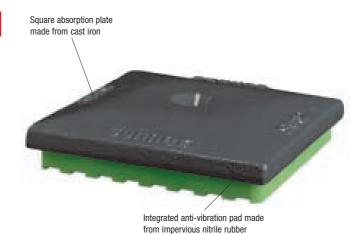

Application areas

- Injection moulding machines
- Engineering machinery



L mm	Levelling bolt	NV1 -© mm	NV2 -© mm	Part no.
120	M12 x 1,25	9	19	19013
150	M12 x 1,25	9	19	19014
210	M16 x 1,50	12	24	19020
250	M20 x 1,50	15	30	19025
300	M24 x 1,50	17	36	19029