



# Linear Actuators



*Linear Motion. Optimized.™*

**Thomson -**  
*Linear Motion. Optimized.*

Often the ideal design solution is not about finding the fastest, sturdiest, most accurate or even the least expensive option. Rather, the ideal solution is the optimal balance of performance, life and cost.

Thomson is best positioned to help you most quickly configure the optimal linear motion solution for your application.

- Thomson invented anti-friction linear bearing technology. We own the broadest standard product offering of mechanical motion technologies in the industry.
- Modified versions of standard product are routine. White sheet design solutions available across our entire portfolio.
- Choose Thomson and gain access to over 70 years of global application experience in diverse industries including packaging, factory automation, material handling, medical, clean energy, printing, automotive, machine tool, aerospace and defense.
- As part of Danaher Motion, we are financially strong and unique in our ability to bring together control, drive, motor, power transmission and precision linear motion technologies.

Thomson is the name you can trust for quality, innovation, on-time delivery, controlled costs, and reduced risk.

In addition to the information contained in this document, a wealth of product and application information is available online at [www.thomsonlinear.com](http://www.thomsonlinear.com). Also online are downloadable 3D models, software tools, our distributor locator and global contact information for Thomson. For immediate assistance in North America contact us at 1-540-633-3549 or email us at [Thomson@danahermotion.com](mailto:Thomson@danahermotion.com).

Talk to us early in the design process to see how Thomson can help identify the optimal balance of performance, life and cost for your next application. And, call us or any of our 2000+ distribution partners around the world for fast delivery of replacement parts.

**The Danaher Business System -**  
Building sustainable competitive advantage into your business

The Danaher Business System (DBS) was established to increase the value we bring to customers. It is a mature and successful set of tools we use daily to continually improve manufacturing operations and product development processes. DBS is based on the principles of Kaizen which continuously and aggressively eliminate waste in every aspect of our business. DBS focuses the entire organization on achieving breakthrough results that create competitive advantages in quality, delivery and performance – advantages that are passed on to you. Through these advantages Thomson is able to provide you faster times to market as well as unsurpassed product selection, service, reliability and productivity.

**Local Support Around the Globe**

Application Centers Global Manufacturing Operations Global Design & Engineering Centers



# Introduction

## Table of Contents

<b>Introduction</b> .....	<b>3</b>	<b>Actuator Controls</b> .....	<b>42</b>
Company Introduction.....	4	DPDT switch .....	43
Product Introduction .....	5	Control MCS-2041 .....	44
The Benefits of Electrification .....	6 - 7	Control MCS-2051 .....	45
Actuator Applications .....	8	Electrak Pro Limit Switch Option Programming Unit ..	46
Selection Procedure .....	9		
<b>Performance Overview</b> .....	<b>10</b>	<b>Accessories and Spare Parts</b> .....	<b>47</b>
Standard Actuator Range.....	10 - 11	Mounting Components.....	47 - 49
Non-driven and Rotary Actuators .....	12	Electrical Components .....	50
Legacy Actuators.....	13	Spare Parts .....	51- 52
<b>Electrak® Actuators</b> .....	<b>14</b>	<b>Ordering Keys</b> .....	<b>53</b>
Electrak 1.....	14 - 15	Electrak DC-actuators.....	53 - 54
Electrak 1SP.....	16 - 17	Electrak AC-actuators.....	55
Electrak 050.....	18 - 19	Non-driven and Rotary Actuators .....	56
Electrak 2.....	20 - 21		
Electrak PPA-DC .....	22 - 23	<b>Glossary</b> .....	<b>57</b>
Electrak 10.....	24 - 25	A - Du .....	57
Electrak Pro .....	26 - 27	Dy - Lo .....	58
Electrak PPA-AC .....	28 - 29	M - P .....	59
Electrak 5.....	30 - 31	R - W .....	60
Electrak 205.....	32 - 33		
<b>Electrak® Non-driven Actuators</b> .....	<b>34</b>	<b>Application Data Form</b> .....	<b>61</b>
Electrak PPA-M.....	34 - 35	Worksheet.....	61
		Drawing/notes.....	62
<b>Rotary Actuators</b> .....	<b>36</b>		
DGB .....	36 - 37		
<b>Electrical Wiring Diagrams</b> .....	<b>38</b>		
DC-actuators .....	38 - 39		
AC-actuators .....	40 - 41		

# Introduction

## Company Introduction

The history of the Thomson Electrak® actuator goes back to the development of ball screw actuators 40 years ago in Marengo, IL, USA. The first generation of general purpose actuators were developed for control of accessory drives on garden tractors and farm equipment. Since that simple beginning, actuators are now used in all types of equipment to automate a process, remove people from dangerous situations, provide remote control or make difficult, tedious manual jobs easier.

The linear actuators in this catalog represent proven design concepts found in the entire Electrak series. From light load 050s to the high performance Electrak Pro series capable of handling loads up to 1000 pounds, Thomson offers features unavailable anywhere else.









### The world's most versatile actuator selection

Thomson combined the clevis to clevis mount Electrak series, and the trunnion mount Electrak PPA units, to provide the most versatile selection of linear actuators available. Our actuator team has solved over 10000 tough application challenges with even tougher actuators. We

built our reputation in the mobile off highway market in extremely demanding operating conditions. And if you can't find the actuator to meet your application, call us for a cost effective actuator built to your needs. Thomson builds more custom actuators than anyone.

### You can count on Thomson

Thomson linear actuators – rugged, reliable remote linear motion control with the push of a button. You can count on Thomson for worldwide sales, service, application support and local availability. Please visit [www.danahermotion.com](http://www.danahermotion.com) for more information.

1967	1969	1974	1982	1984	1987	1988	1991
The first generation of actuators for use in garden tractors and farm equipment is released.	First line of ball screw driven actuators with right angle AC and DC motors is released.	First line of actuators with parallel motors and both acme and ball screw drive is released.	The "Tiger" line actuators are released for OEMs.	Electrak 1, 2, 5, 10 and 100 are released for distribution.	Electrak 205 and the first line of MCS controls are released.	Electrak 1SP with feedback potentiometer is released.	The first lifting columns, DMD and DMA, are released.
							

# Introduction

## Product Introduction

Thomson actuators are easy to mount and operate, require no maintenance, don't leak hydraulic fluid, are easy to incorporate into an automated process and once installed they will work reliably under the toughest conditions year after year.

Actuators offer advantages over mechanical and hydraulic systems in many applications. They are self-contained, rugged, and durable, making them ideal anywhere you want to lift, lower, push, pull, rotate or position a load.

### Compact design

With their compact size, actuators can be located in confined areas. An actuator with a 4 inch stroke length can produce 1500 pounds of force from a 12 inch package. Electrak 1 and 050 series actuators fit small areas with package lengths as short as 6 inches.

### Rugged and reliable

All Thomson actuators incorporate strong, high quality components to assure trouble-free service. Rugged spur, worm or helical gearing, aircraft quality lubricants and high performance motors provide the maximum life and value. The actuators are gasketed and sealed throughout for protection in wet, dirty and oily environments and are ideal for use on outdoor equipment. The rod style actuators have stainless steel or aluminum extension tubes to resist corrosion.

### Maintenance-free

All adjustments and lubrication are made at the factory and no maintenance is required or recommended.

Consistent, repeatable performance is provided for the entire lifetime of the actuator.

### Bidirectional








Thomson actuators can push and pull loads ranging from one pound to 3/4 ton, and can extend up to 36 inches. With the Thomson series of actuator controls, you can create an actuator control system to meet your particular motion control requirements.

### Safe operation

Motors used on Electrak actuators utilize thermal switches in their windings or Electronic Load Monitoring to shut the actuator off in case of overheating. A standard overload clutch or Electronic Load Monitoring will stop the motion if the load is too great or at the end of a stroke. All linear actuators will hold their loads with power removed.

### Versatile

Stroke lengths of 1 to 36 inches are available and speeds are as high as two inches per second. Actuators are easy to apply, quick to install and usually only requiring two wires for operation. A wide variety of options and controls makes it easy to find the perfect actuator for your application. And if you have special needs, cost effective custom solutions are our speciality.

1992	1994	1998	1999	2000	2004	2006
A patent for a load lock device is granted.	Electrak 1LL is released.	Electrak 150 with two patents is released. AC control line is released.	Electrak 050 with patented design and the first rotary actuators are released.	The first LM80 rodless actuator is released.	The triple profile lifting column TC16 and the "sweeper" actuator are released.	The Electrak Pro actuator line and the DCG control line are released.
						

# Introduction

## The Benefits of Electrification

Electrification is converting manual, hydraulic and pneumatic operations to electromechanical motion. Substantially improved machine performance and cost advantages can be gained through electrification.

### Reduce costs

- Electric actuation components cost less than comparable hydraulic and pneumatic systems.
- One electric linear actuator is faster and easier to install than the multiple hydraulic and pneumatic components required to achieve the same function.
- Electric actuators feature quick and predictable system tuning when compared to the headaches of configuring hydraulic systems and their components which contend with power variation, temperature variation, and non-linear performance profiles.
- Compare zero maintenance electric actuators against the fluid replacement, leak repairs and other routine maintenance needed to support hydraulic systems.
- Eliminate the environmental problems and costs associated with hydraulic fluid leaks and fluid disposal.

### Boost productivity and efficiency

- Improve control over critical machine operations with:
  - Multiple digital and analog feedback options
  - Fixed and programmable limit switches for “teach and repeat” positions
  - Low voltage switching options that can interface directly with programmable PC/PLC controllers
  - Pulse width modulation for variable speed control
- Superior accuracy and repeatability
- Link and automate simultaneous processes
- Reduce down time with:
  - Zero maintenance
  - Longer component life
  - Redundancy through manual override
- Improve safety and reduce costs by removing people from danger with convenient remote control

### Great opportunities for electric conversion

#### Making jobs easier

- Raising and lowering a deck on a mower, paver or floor scrubber.
- Shifting manual transmission.
- Lifting wheelchairs into a vehicle.
- Opening and closing doors on buses or vans.

#### Automating a process

- Moving twine across a round bale of hay for consistent wrap.
- Varying the chute opening on a salt/sand spreader based on speed for consistent application.
- Lift and lower pantographs on electrical trains and trams.

#### Providing remote control

- Throttle control from the rear of garbage trucks.
- Positioning the discharge spout on a large chipper, snowblower or combine.
- Opening a chute on a salt/sand spreader.
- Positioning of solar energy panels and wind power plant turbines.
- Opening/closing the engine hatch on boats.
- Positioning boat, handicap vehicle seats.
- Belt tensioning.

#### Removing people from danger

- Sliding a cover over the stairs in a recreational vehicle.
- Throttle control for a tree stump grinder to keep the operator away from moving parts or flying debris.
- Medical waste/refuse compacting.

#### Replacing hydraulics or pneumatics


- Power steering.
- Dump beds on ATVs.
- Positioning mower decks on golf course equipment.



# Introduction

## The Benefits of Electrification

Replacing hydraulic or pneumatic cylinders with electrical linear actuators means a simpler and smaller installation, easier control, lower energy costs, higher accuracy, less maintenance, less noise and a cleaner, healthier environment.

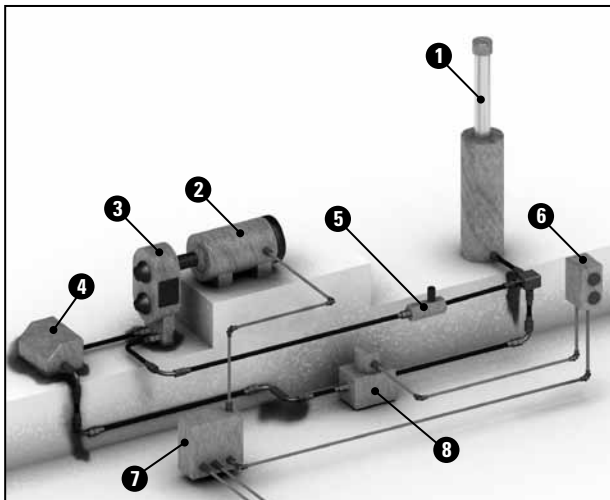


You can design, purchase and install all these components or you can select and install an actuator and switch.

### Single acting, uni-directional hydraulic cylinder system

1. Hydraulic cylinder
2. Electric pump motor
3. Hydraulic pump
4. Hydraulic oil reservoir
5. Check valve
6. Operator push button box
7. Relay cabinet
8. Unloading valve

This single acting, uni-directional hydraulic cylinder system is one of the simplest hydraulic solutions. This system only allows consistent performance in one direction. In order to get consistent performance in both directions a bi-directional system would be required which is even more complex and costly.

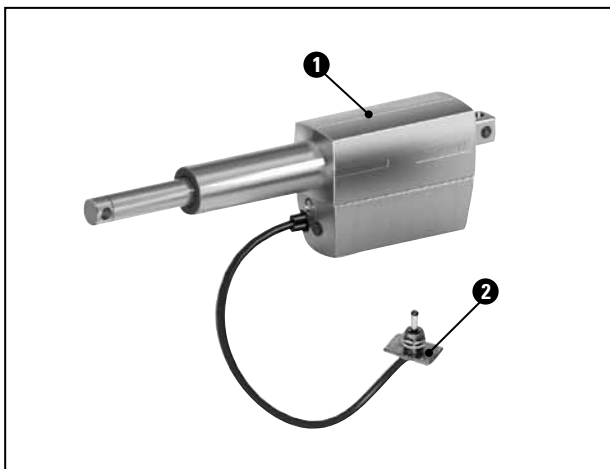

Plug and play type of connections, simple installation and no need for any set up or adjustments ensures accurate, clean and trouble free operation within the hour.

### Electric linear actuator system

1. Linear actuator
2. DPDT switch

This simple electrical actuator system will ensure consistent operation in both directions. It will also give you added features such as electronic load monitoring, end of stroke limit switches, mid stroke protection and manual override operation in case of power failure. Optional features such as analog or digital position feedback, adjustable end of stroke limit switches, end of stroke indication outputs and signal following capability are also available. Another advantage is that a system like this is easy to integrate with other control systems normally found in industrial systems or vehicles such as PLC's, micro-controllers, computers or simple relay based systems.



# Introduction

## Actuator Applications

Thomson Electrak actuators can be found in the most diverse applications, ranging from agricultural to industrial, ventilation and medical equipment. Anywhere you want to lift, lower, push, pull, rotate or position a load - only your imagination will set the limit.

### Mobile-off-highway

Actuators are widely used in agricultural, construction, mining, forestry, road work and railway equipment for the control of seats, hoods, doors, covers, balers, pantographs, sprayer booms, throttles and much more.

### Turf and garden

Actuators can be found on riding lawn mowers, golf carts, garden tractors, cleaning machines, sky lifts and other utility vehicles.

### Industrial equipment

Actuators are used on conveyor belts, for adjustable work tables/platforms and in the opening and closing of hatches, doors and locks. They are also common in machines for dispensing, cutting, packaging, labeling, scanning or printing.

### Health and fitness

Actuators are commonly used in patient lifts/beds, handicap adapted vehicles and wheel chairs to position patients or equipment. Other applications include hospital devices, examination chairs/tables and work out/gym apparatus.

### Office, domestic and entertainment equipment

At home, in the office and in the entertainment business actuators are used in automatic doors, lifts, garage doors, gates, satellite dishes, beds, reclining chairs, adjustable office desks, arcade games, vending machines, theatre/TV/movie props and theme park attractions.

### Marine

On boats, ships and oil rigs actuators are used in seats, hatches, fire doors, rescue equipment, valves and throttles.

### Ventilation and process control

Actuators are used for valve control in ventilation and process equipment.





# Introduction

## Selection Procedure

Thomson actuators have been divided into good, better and best groups to help you select the appropriate actuator for your application. By using the simple selection procedure described below and the Performance Overview on the next few pages, the process will be even easier.

### Good

These actuators are the lowest cost solution, provide capable, reliable performance and have some flexibility of options and configurations. If you just need a basic actuator, this is the best choice.



### Better

These actuators have more flexibility in options, configurations and modifications. They have passed the test of time in the toughest agriculture and construction applications. Choose from this group if you need a rugged, heavy duty actuator customized to your application.



### Best

These robust and strong actuators are the market leaders with state of the art technology and flexibility. They are smaller, lighter and have a shorter retracted length than other actuators on the market. If you need electronic load monitoring, programmable limit switches, digital feedback or signal following, this is the group for you.



### Selection procedure

#### Step 1 - Determine Voltage

DC actuators can be operated by battery, a rectifier or an actuator control with 115/230 Vac input. AC actuators are either 115 or 230 Vac.

#### Step 2 - Determine Load/Speed

Select the actuator which has the load and speed rating that suits your application.

#### Step 3 - Select Stroke Length

Choose the desired stroke length from either the Performance Overview pages or the individual product pages.

#### Step 4 - Verify Design Considerations

Do you need a very short retracted length, adjustable, fixed or programmable limit switches, electronic load monitoring, digital or analog feedback, low voltage power switching, manual override, signal following, clevis mounting, tube mounting or trunnion mounting?

#### Step 5 - Select Control

The controls in the catalog are designed for use with Electrak actuators and range from a simple switch to a control with membrane switches and feedback display or with a hand pendant.

### On-line selection software







On [www.danahermotion.com/linear\\_actuator\\_advisor](http://www.danahermotion.com/linear_actuator_advisor) you can select an actuator by using the actuator product advisor. This easy to use software lets you play with all the parameters and will give you all the relevant data and the correct ordering information for your choice.

### Can't find what you are looking for?

If you are an OEM customer and can't find exactly what you need, contact one of our application engineers at 540-633-3400 for a custom solution.

# Performance Overview






## Standard Actuator Range

	ELECTRAK					
	1	1SP	050	2	PPA-DC	10
						
<b>Product availability</b>						
North America / Europe / Asia <sup>1</sup>	•/•/•	•/•/•	•/•/•	•/ /	•/•/•	•/•/•
<b>General performance</b>						
Product group rating	good	good	better	better	good	better
Input voltage - Vdc / Vac [V]	12, 24 /	12, 24 /	12, 24, 36/	12 /	12, 24, 36, 90 <sup>3</sup> /	12, 24, 36/
Maximum dynamic load [lbf]	75	75	112	250	1500	1500
Maximum speed [in/sec]	3.0	3.0	1.9	1.2	1.3	2.4
Maximum stroke length [in]	6	6	8	24	36	24
Restraining torque [lbf-in]	20	0	0	65	200	100
Protection class	IP66	IP66	IP66 Q-IP51	IP66	IP54	IP66
<b>Features</b>						
Mounting configuration	clevis	clevis	clevis	clevis	trunnion	clevis
Screw type - acme / worm / ball	•/ /	•/ /	/•/	•/ /	/ /•	• <sup>2</sup> / •
Overload clutch			•	•	•	•
Motor overload protection	•	•	•	•	•	•
End of stroke limit switches	•		•			
Potentiometer feedback		•				
Electronic load monitoring						
Dynamic braking			• <sup>7</sup>			
Manual override						
<b>Optional features</b>						
End of stroke limit switches				• <sup>3</sup>	•	• <sup>3</sup>
Potentiometer feedback			•	•	•	•
Encoder feedback					•	
Programmable limit switches						
End of stroke indication outputs						
Low current power switching						
Signal follower input						
Manual override				•	• <sup>3</sup>	•
<b>More information</b>						
See page <sup>1</sup>	14	16	18	20	22	24
<b>Actuator Controls</b>						
Recommended control	DPDT Switch	DPDT Switch	DPDT Switch	DPDT Switch	DPDT Switch	DPDT Switch

<sup>1</sup> Products not available in this region are not further described in this catalog. Contact customer support for more information.

<sup>2</sup> Not available in North America.



Please visit [www.danahermotion.com/product-selector](http://www.danahermotion.com/product-selector) to access free product selectors for models shown here as well as products not listed in this catalog.

	Pro	PPA-AC	5	205	OTHER
					
	•/•/•	•/•/•	•/•/•	•/ /	<p>On the next pages you can find information on the following type of actuators:</p> <ul style="list-style-type: none"> <li>• Non-driven</li> <li>• Rotary</li> <li>• Legacy</li> <li>• Custom</li> </ul>
	best	good	better	better	
	12, 24 /	/ 115, 230	/ 115 <sup>3</sup> , 230, 400 <sup>2</sup>	/ 115, 230	
	1000	1500	1500	1500	
	2.0	0.6	2.1	2.1	
	12	36	24	24	
	150 / 0 <sup>6</sup>	200	100	100	
	IP66	IP22	IP55	IP55	
	clevis	trunnion	clevis	clevis/tube	
	•/ /•	/ /•	• <sup>2</sup> / /•	/ /•	
		•	•		
	•	•	•	•	
				•	
				•	
	•				
	•				
	•				
		•	• <sup>3</sup>		
	•	•	•		
	•	•			
	•				
	•				
	•				
		• <sup>3</sup>	•		
	26	28	30	32	
	DPDT Switch	DPDT Switch	MCS-2041	MCS-2051	

<sup>3</sup> Not available in Europe. <sup>4</sup> For horizontal operation only. <sup>5</sup> For vertical operation only. <sup>6</sup> Without / with anti-rotation option. <sup>7</sup> At end of stroke only.

# Performance Overview

## Non-driven and Rotary Actuators






	PPA-M	FA14
		
<b>Product availability</b>		
North America / Europe / Asia <sup>1</sup>	• / • / •	/ • / •
<b>General performance</b>		
Product group rating	good	best
Max. input torque [lbf-in]	80	15.9
Max. input speed [rpm]	100	3000
Maximum dynamic load [lbf]	1500	1500
Maximum speed [in/sec]	0.33	1.45
Maximum stroke length [in]	36	23.6
Restraining torque [lbf-in]	200	0
<b>Standard features</b>		
Mounting configuration	trunnion	clevis/trunnion
Screw type - acme / worm / ball	/ / •	• / / •
Overload clutch		•
<b>Optional features</b>		
Manual override		•
Protective bellows	•	
External magnetic position sensors		•
<b>More information</b>		
See page <sup>1</sup>	34	-

<sup>1</sup>Products not available in this region are not further described in this catalog. Contact customer support for more information.

	ROTARY
	DGB
	
<b>Product availability</b>	
North America / Europe / Asia	• / • / •
<b>General performance</b>	
Product group rating	better
Input voltage - Vdc / Vac [V]	12, 24, 36 /
Maximum torque [lbf-in]	100
Maximum speed [rpm]	200
Maximum duty cycle [%]	25
Protection class	IP56
<b>Standard features</b>	
Mounting configuration	clevis/tapped holes
Overload clutch	•
Motor overload protection	•
<b>Optional features</b>	
Dual output shafts	•
Manual override	•
<b>More information</b>	
See page	36

# Performance Overview

## Legacy Actuators

	ELECTRAK LEGACY ACTUATORS				
	1LL	150	100	LA14	LA24
					
<b>Product availability</b>					
North America / Europe / Asia	• / /	• / • / •	• / /	/ • / •	/ • / •
<b>General performance</b>					
Product group rating	good	better	better	better	better
Input voltage - Vdc / Vac [V]	12, 24 /	12, 24, 36 / 115 <sup>1</sup>	24 /	12, 24, 36 /	/ 230, 400
Maximum dynamic load [lbf]	75	450	1500	1500	1500
Maximum speed [in/sec]	3.0	2.8	1.9	2.4	2.4
Maximum stroke length [in]	6	16	24	23.6	23.6
Restraining torque [lbf-in]	0	0	100	0	0
Protection class	IP65	IP56	IP65	IP65	IP45
<b>Standard features</b>					
Mounting configuration	clevis	clevis	tube	clevis/trunnion	clevis/trunnion
Screw type - acme / worm / ball	• / /	/ • /	/ / •	• / / •	• / / •
Overload clutch				•	•
Motor overload protection		•	•	•	•
Potentiometer feedback			•		
Fixed end of stroke limit switches	•				
Adjustable end of stroke limit switches			•		
Internally restrained	•	•		•	•
<b>Optional features</b>					
Adjustable end of stroke limit switches		•			
Potentiometer feedback		•		•	•
Manual override				•	•
External magnetic position sensors				•	•

<sup>1</sup> Not available in Europe.

### About Legacy Actuators

The legacy products will not be further described in this catalog. We recommend you choose one of the products on the preceding pages, especially when designing new equipment. However, the legacy actuators can still be purchased and we fully support them. Please contact customer support if you need more information.

### About Custom Actuators

The actuators you see on these pages are some of the building blocks we use to create cost effective custom actuators for OEMs. If you can't find the actuator that meets your needs, call us at 540-633-3400. Thomson is the industry leader in custom actuator design.



# Electrak 1

12 and 24 Vdc - load up to 75 lbf



» Ordering Key - see page 53

» Glossary - see page 57

» Electric Wiring Diagram - see page 38

## Standard Features and Benefits

- Very compact and lightweight
- Integrated end of stroke limit switches
- Corrosion resistant housing
- Self-locking acme screw drive system
- Maintenance free
- Ideal for replacement of comparable size pneumatic and hydraulic cylinders

## General Specifications

Parameter	Electrak 1
Screw type	acme
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	no, self-locking
End of stroke protection	end of stroke limit switches
Mid stroke protection	no
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric Pack-Con male 8911773 with terminal 6294511. Mating connector: 8911772 with terminal 8911639 (p/n 9300-448-001)
Certificates	CE optional*
Options	none

\* Contact customer support

## Performance Specifications


Parameter		Electrak 1
Maximum load, dynamic / static	[lbf]	25 / 300
S •• -09A4		75 / 300
S •• -17A8		
Speed, at no load / at maximum load	[in/sec]	3.00 / 2.10
S •• -09A4		1.00 / 0.65
S •• -17A8		
Available input voltages	[Vdc]	12, 24
Standard stroke lengths	[in]	2, 4, 6
Operating temperature limits	[°F]	-15 – +150
Full load duty cycle @ 77 °F	[%]	25
End play, maximum	[in]	0.036
Restraining torque	[lbf-in]	20
Lead cross section	[AWG]	18
Lead length	[in]	4.5
Protection class		IP66

## Compatible Controls

Control model	See page
DPDT switch	43

# Electrak 1

12 and 24 Vdc - load up to 75 lbf

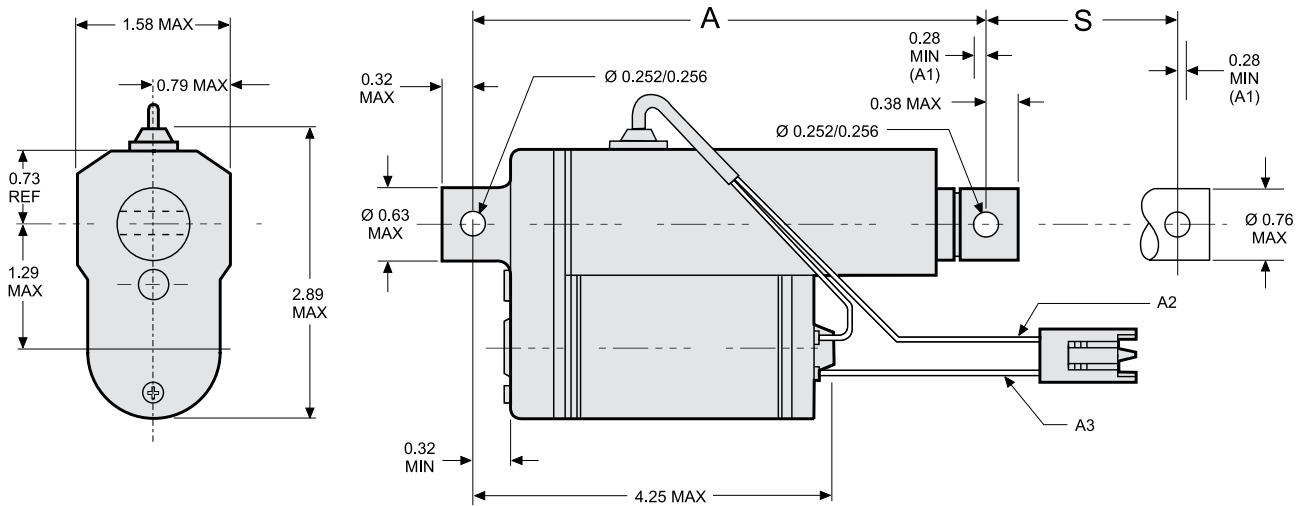


S: stroke  
 A: retracted length  
 A1: installation must include at least this much coast beyond limit switch shut off

Ordering stroke	[inch]	2	4	6
Actual stroke (S)	[inch]	1.8	3.8	5.8
Retracted length (A)	[inch]	6.3	8.3	10.3
Weight	[lb]	1.2	1.4	1.5

## Performance Diagrams


Life vs. Load

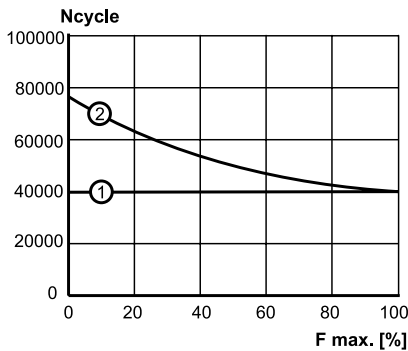

Ncycle: life in number of cycles  
 (one cycle = extend and retract)  
 F max: percent of maximum rated load

- 1: all models using the internal limit switches for end of stroke
- 2: all models when end of stroke is controlled externally


Duty Cycle vs. Load

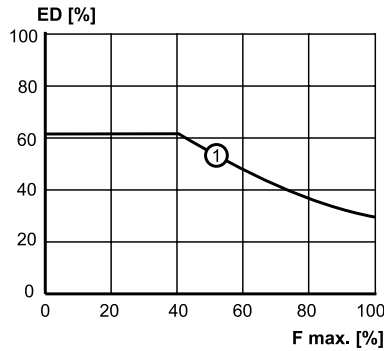

ED: duty cycle in percent at 77° F  
 F max: percent of maximum rated load

- 1: all models

Speed and Current vs. Load

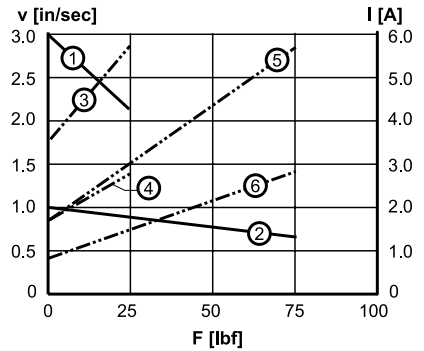

V: speed I: current F: load

- 1: speed 25 lbf
- 2: speed 75 lbf
- 3: current 25 lbf, 12 Vdc
- 4: current 25 lbf, 24 Vdc
- 5: current 75 lbf, 12 Vdc
- 6: current 75 lbf, 24 Vdc

# Electrak 1SP

12 and 24 Vdc - load up to 75 lbf



## Standard Features and Benefits

- Very compact and lightweight
- Potentiometer feedback
- Corrosion resistant housing
- Self-locking acme screw drive system
- Maintenance free
- Internally restrained extension tube
- Ideal for replacement of comparable size pneumatic and hydraulic cylinders

## General Specifications

Parameter	Electrak 1SP
Screw type	acme
Internally restrained	yes
Manual override	no
Dynamic braking	no
Holding brake	no, self-locking
End of stroke protection	no
Mid stroke protection	no
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric Pack-Con male 8911773 with terminal 6294511. Mating connector: 8911772 with terminal 8911639 (p/n 9300-448-001)
Certificates	CE optional*
Options	none

\* Contact customer support

» Ordering Key - see page 53

» Glossary - see page 57

» Electric Wiring Diagram - see page 38

## Performance Specifications

Parameter		Electrak 1SP
Maximum load, dynamic / static	[lbf]	25 / 300
SP •• -09A4		75 / 300
SP •• -17A8		
Speed, at no load / at maximum load	[in/sec]	3.00 / 2.10
SP •• -09A4		1.00 / 0.65
SP •• -17A8		
Available input voltages	[Vdc]	12, 24
Standard stroke lengths	[in]	2, 4, 6
Operating temperature limits	[°F]	-15 – +150
Full load duty cycle @ 77 °F	[%]	25
End play, maximum	[in]	0.036
Restraining torque	[lbf-in]	0
Lead cross section	[AWG]	18
Lead length	[in]	4.5
Protection class		IP66
Potentiometer	[kOhm]	10**


\*\* See table on page 17 for resistance change per inch.

## Compatible Controls

Control model	See page
DPDT switch	43

# Electrak 1SP


12 and 24 Vdc - load up to 75 lbf

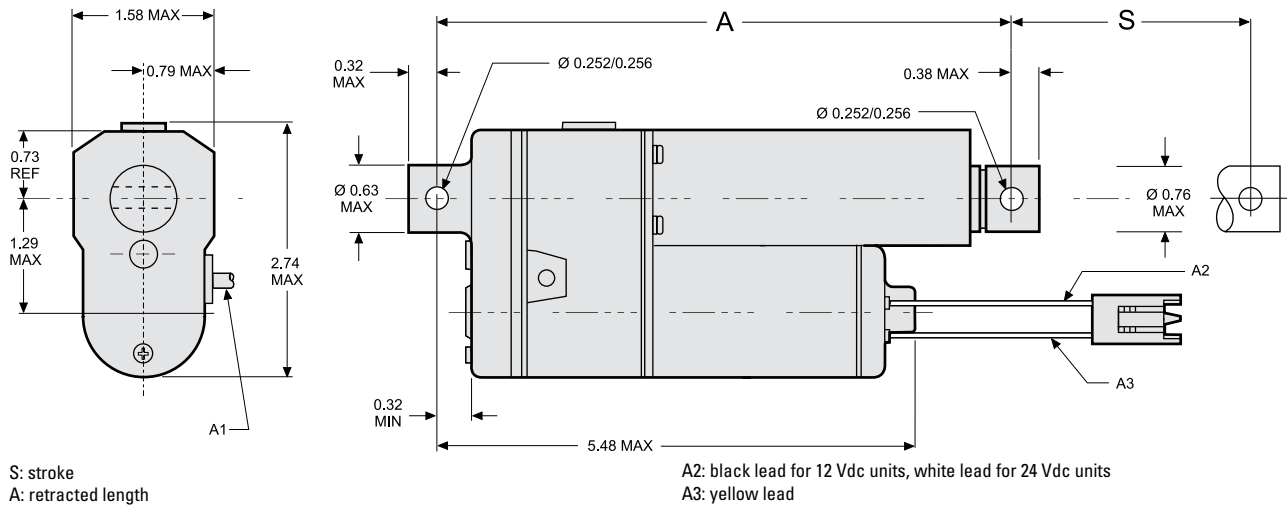

Ordering stroke	[inch]	2	4	6
Actual stroke (S)	[inch]	2.3	4.5	6.8
Retracted length (A)	[inch]	7.8	10.0	12.2
Weight	[lb]	1.2	1.4	1.5
Potentiometer resistance change	[ohm/in]	2400	1200	800

## Performance Diagrams


Life vs. Load

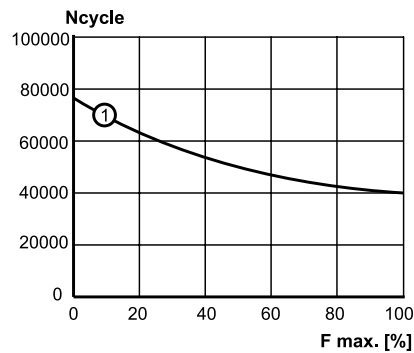

Ncycle: life in number of cycles  
 (one cycle = extend and retract)  
 F max: percent of maximum rated load

1: all models when end of stroke is controlled externally


Duty Cycle vs. Load

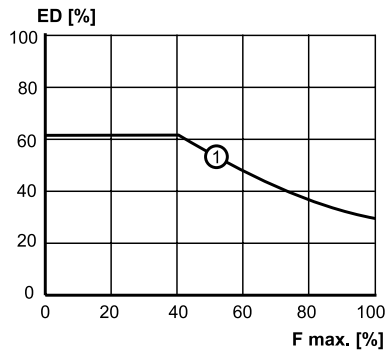

ED: duty cycle in percent at 77° F  
 F max: percent of maximum rated load

1: all models

Speed and Current vs. Load

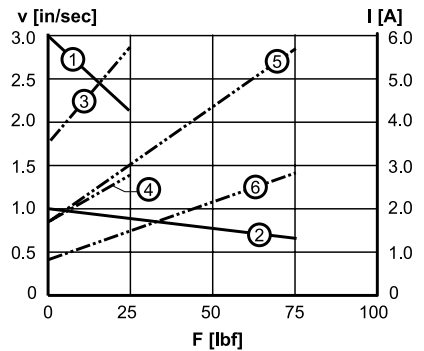

V: speed I: current F: load

- 1: speed 25 lbf
- 2: speed 75 lbf
- 3: current 25 lbf, 12 Vdc
- 4: current 25 lbf, 24 Vdc
- 5: current 75 lbf, 12 Vdc
- 6: current 75 lbf, 24 Vdc

# Electrak 050

12, 24 and 36 Vdc - load up to 112 lbf



## Standard Features and Benefits

- Designed for office or medical applications
- Small, quiet and lightweight
- Very short retracted length
- Low cost
- Durable and corrosion free plastic housing
- Color molded into the plastic, no painting required
- End of stroke limit switches with dynamic braking
- Maintenance free
- Internally restrained extension tube
- Estimated life is minimum 40000 cycles
- Q-version for noise sensitive applications (24 Vdc only)

## General Specifications

Parameter	Electrak 050
Screw type	worm
Internally restrained	yes
Manual override	no
Dynamic braking	yes, at end of stroke
Holding brake	no, self-locking
End of stroke protection	internal limit switches
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric Pack-Con male 8911773 with terminal 6294511 Mating connector: 8911772 with terminal 12040508
Certificates	CE optional* Non pot versions are RoHS compliant
Options	<ul style="list-style-type: none"> <li>• potentiometer 10 kOhm**</li> <li>• cross holes rotated 90°</li> <li>• white housing</li> </ul>

\* Contact customer support

\*\* See performance specification table for resistance change per inch of travel.

» Ordering Key - see page 53

» Glossary - see page 57

» Electric Wiring Diagram - see page 38

## Performance Specifications

Parameter		Electrak 050
Maximum load, dynamic / static	[lbf]	112 / 224
DE ••• 17W41		60 / 120
DE ••• 17W42		30 / 60
DE ••• 17W44		
Speed, at no load / at maximum load	[in/sec]	0.48 / 0.37
DE •• - 17W41		0.95 / 0.72
DE •• - 17W42		1.90 / 1.45
DE •• - 17W44		0.36 / 0.30
DE24Q17W41		0.70 / 0.55
DE24Q17W42		1.50 / 1.20
DE24Q17W44		
Available input voltages	[Vdc]	12, 24, 36
Standard stroke lengths	[in]	2, 4, 6, 8
Operating temperature limits	[°F]	-30 – +180
Full load duty cycle @ 70 °F	[%]	25
End play, maximum	[in]	0.06
Restraining torque	[lbf-in]	0
Lead cross section	[AWG]	18
Lead length	[in]	6
Protection class		
standard version		IP66
Q-version		IP51
Potentiometer resistance change	[ohm/in]	560
DE ••• 17W41		556
DE ••• 17W42		540
DE ••• 17W44		


## Compatible Controls

Control model	See page
DPDT switch	43



# Electrak 050

12, 24 and 36 Vdc - load up to 112 lbf

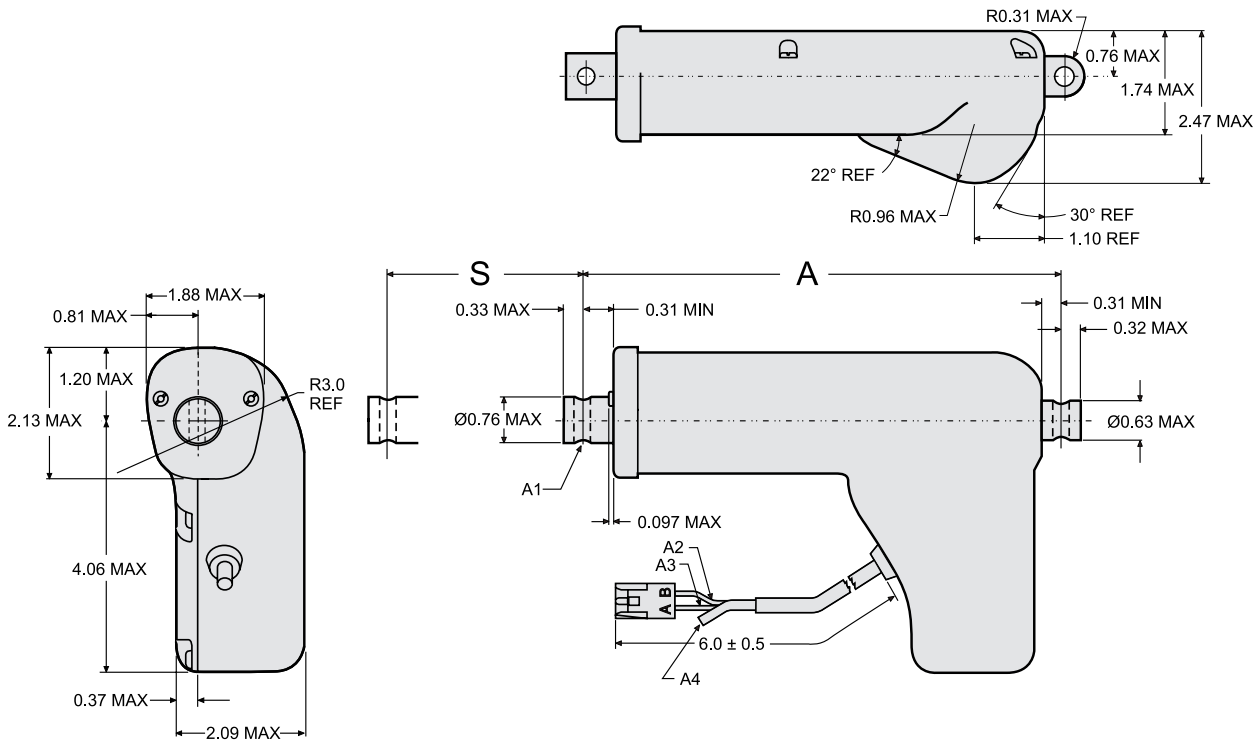


S: stroke  
 A: retracted length  
 A1: Ø 0.254 ± 0.003 mounting cross holes (2 ×) in standard position

A2: red lead  
 A3: yellow lead  
 A4: vent tube Ø 0.125 inch


Stroke (S)	[inch]	2	4	6	8
Retracted length (A)	[inch]	5.5	7.5	9.5	11.5
Retracted length, with potentiometer (A)	[inch]	6.75	8.75	10.75	—
Weight	[lb]	1.4	1.6	1.8	2.0
Weight with potentiometer	[lb]	1.6	1.8	2.0	—

## Performance Diagrams

050, standard version  
 Speed and Current vs. Load

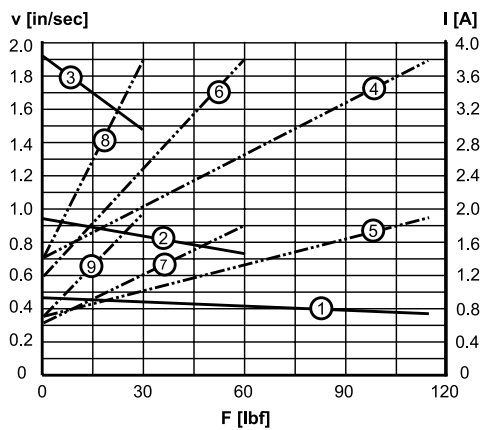

050, Q-version  
 Speed and Current vs. Load

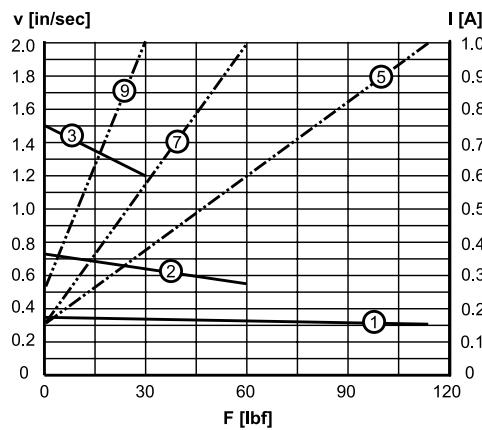

V: speed I: current F: load

- 1: speed 112 lbf
- 2: speed 60 lbf
- 3: speed 30 lbf
- 4: current 12 Vdc, 112 lbf \*
- 5: current 24 Vdc, 112 lbf
- 6: current 12 Vdc, 60 lbf \*
- 7: current 24 Vdc, 60 lbf
- 8: current 12 Vdc, 30 lbf \*
- 9: current 24 Vdc, 30 lbf

\* 12 Vdc not possible for Q-version.

# Electrak 2

12 Vdc - load up to 250 lbf



» Ordering Key - see page 53

» Glossary - see page 57

» Electric Wiring Diagram - see page 38

## Standard Features and Benefits

- Economical and robust actuator for medium loads
- Stainless steel extension tube
- Self-locking acme screw drive system
- Overload clutch for mid and end of stroke protection
- Motor with thermal switch
- Maintenance free

## General Specifications

Parameter	Electrak 2
Screw type	acme
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake	no, self-locking
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric 56 series 2984883 with terminal 2962987. Mating connector: 2973781 with terminal 2962573 (p/n 9100-448-001)
Certificates	CE optional*
Options	<ul style="list-style-type: none"> <li>• potentiometer*</li> <li>• manual override*</li> <li>• limit switches*</li> </ul>

\* Contact customer support

## Performance Specifications

Parameter		Electrak 2
Maximum load, dynamic / static	[lbf]	250 / 1000
Speed, at no load / at maximum load	[in/sec]	
D12-10A5 (high speed)		1.20 / 1.00
D12-20A5 (standard speed)		0.61 / 0.55
Available input voltages	[Vdc]	12
Standard stroke lengths	[in]	4, 8, 12, 18*, 24*
Operating temperature limits	[°F]	-15 – +150
Full load duty cycle @ 77 °F	[%]	25
End play, maximum	[in]	0.08
Restraining torque	[lbf-in]	65
Lead cross section	[AWG]	14
Lead length	[in]	7.5
Protection class		IP66


\* Contact customer support

## Compatible Controls

Control model	See page
DPDT switch	43

# Electrak 2

12 Vdc - load up to 250 lbf

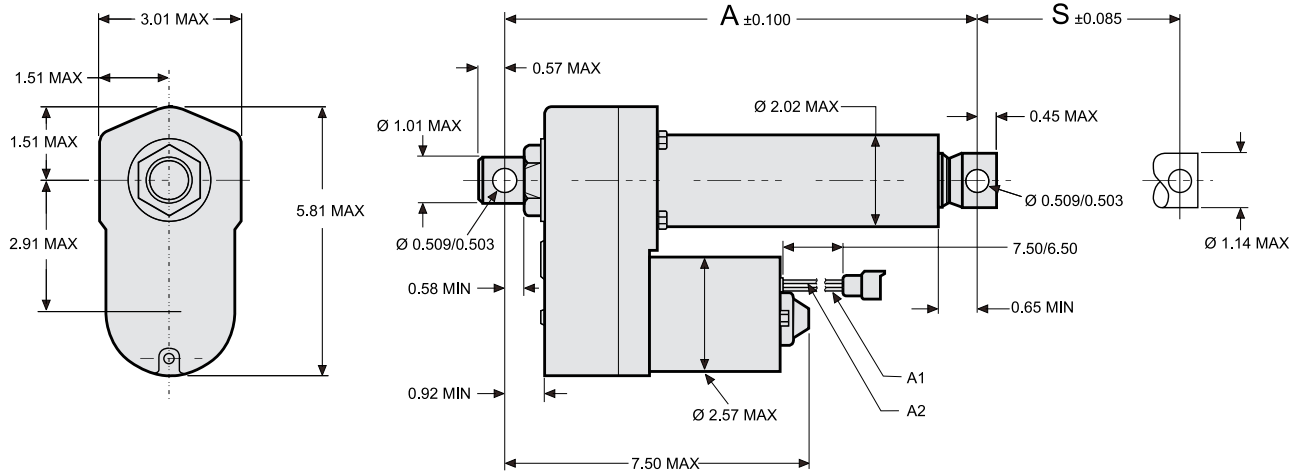


S: stroke  
 A: retracted length  
 A1: yellow lead  
 A2: red lead

Stroke (S)	[inch]	4	8	12
Retracted length (A)	[inch]	10.3	14.3	18.3
Weight	[lb]	10.0	10.7	11.4


## Performance Diagrams

Life vs. Load

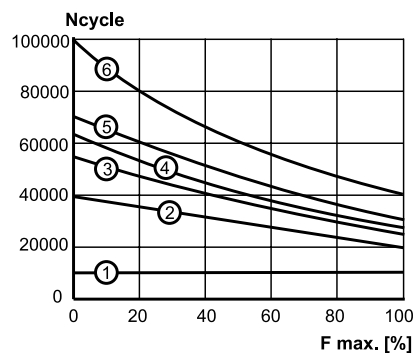


Ncycle: life in number of cycles  
 (one cycle = extend and retract)  
 F max: percent of maximum rated load  
 1: all models using the clutch at the end of stroke  
 2: standard speed model, 12 inch stroke  
 3: standard speed model, 8 inch stroke  
 4: high speed model, 12 inch stroke  
 5: high speed model, 8 inch stroke and  
 standard speed model, 4 inch stroke  
 6: high speed model, 4 inch stroke

Duty Cycle vs. Load

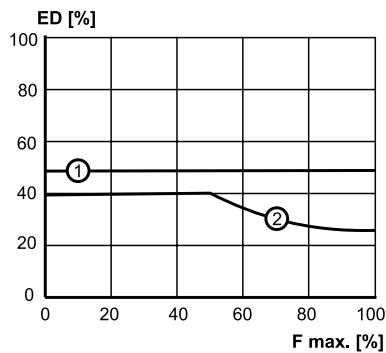

ED: duty cycle in percent at 77° F  
 F max: percent of maximum rated load  
 1: standard speed model  
 2: high speed model

Speed and Current vs. Load

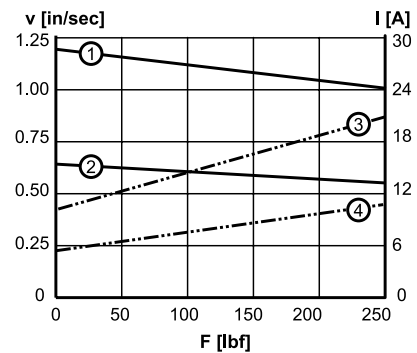

V: speed I: current F: load  
 1: speed high speed model  
 2: speed standard speed model  
 3: current high speed model  
 4: current standard speed model

# Electrak PPA-DC

12, 24, 36 and 90 Vdc - load up to 1500 lbf

» Ordering Key - see page 54

» Glossary - see page 57

» Electric Wiring Diagram - see page 39



## Standard Features and Benefits

- Strong and versatile heavy duty actuator
- High duty cycle
- Highly efficient ball screw drive system
- Overload clutch for mid and end of stroke protection
- Stroke lengths up to 36 inch
- Four different input voltages to choose from
- Motor with thermal switch
- Maintenance free
- Large range of options

## General Specifications

Parameter	Electrak PPA-DC
Screw type	ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake	yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads
Motor connector	no
Certificates	CE optional*
Options	<ul style="list-style-type: none"> <li>• end of stroke limit switches</li> <li>• potentiometer</li> <li>• encoder</li> <li>• protective bellows</li> <li>• manual override*</li> </ul>

\* Contact customer support

## Performance Specifications


Parameter	PPA-DC
Maximum load, dynamic / static PPA •• -18B65 PPA •• -58B65	[lbf] 750 / 3000 1500 / 3000
Speed, at no load / at maximum load PPA12(24)-18B65 PPA12(24)-58B65 PPA90-18B65 PPA90-58B65	[in/sec] 1.26 / 1.10 0.49 / 0.37 0.80 / 0.63 0.17 / 0.17
Available input voltages	[Vdc] 12, 24, 36, 90
Standard stroke lengths	[in] 4, 8, 12, 18, 24, 36
Operating temperature limits	[°F] -15 – +150
Full load duty cycle @ 77 °F	[%] 30
End play, maximum	[in] 0.040
Restraining torque PPA •• -18B65 PPA •• -58B65	[lbf-in] 100 200
Lead cross section	[AWG] 14
Lead length	[in] 16.5
Protection class	IP54

## Compatible Controls

Control model	See page
DPDT switch	43

# Electrak PPA-DC

12, 24, 36 and 90 Vdc - load up to 1500 lbf

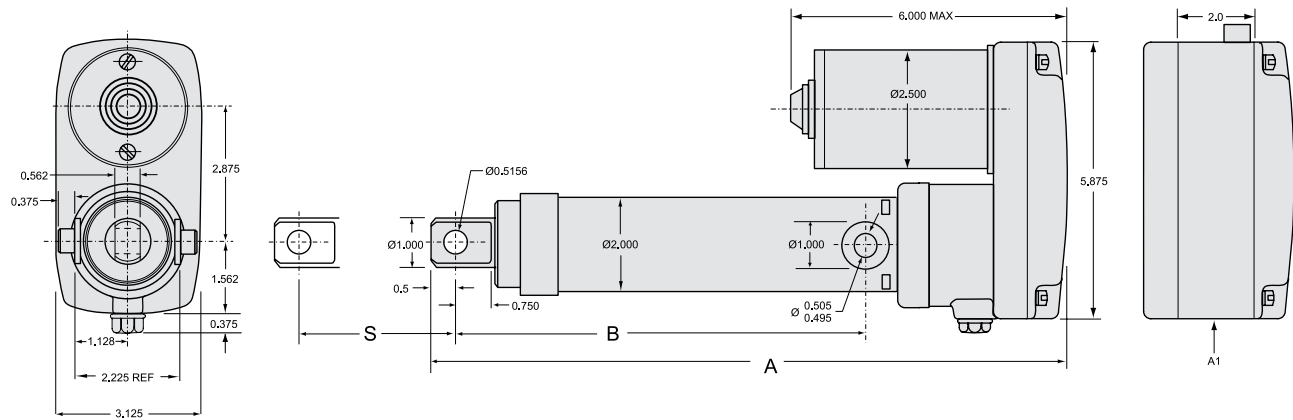

S: stroke  
A: retracted length

B: retracted length to trunnions  
A1: housing dimensions for limit switch, encoder or potentiometer options


Stroke (S)	[inch]	4	8	12	18	24	36
Retracted length (A) without options	[inch]	13.7	17.7	21.7	29.7	35.7	47.7
Retracted length (A) with limit switch, encoder or potentiometer	[inch]	15.7	19.7	23.7	31.7	37.7	49.7
Retracted length to trunnions (B)	[inch]	8.8	12.8	16.8	24.8	30.8	42.8
Weight	[lb]	10	11.6	13.3	15.9	18.5	23.8
Add on weight for limit switch, encoder or potentiometer	[lb]	1.7	1.7	1.7	1.7	1.7	1.7

## Performance Diagrams

### Speed and Current vs. Load

12, 24 and 36 Vdc models

90 Vdc model

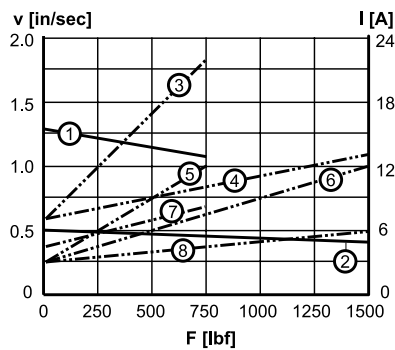

Contact the factory for 90VDC applications.

V: speed I: current F: load

- 1: speed 750 lbf
- 2: speed 1500 lbf
- 3: current 750 lbf, 12 Vdc
- 4: current 1500 lbf, 12 Vdc
- 5: current 750 lbf, 24 Vdc
- 6: current 1500 lbf, 24 Vdc
- 7: current 750 lbf, 36 Vdc
- 8: current 1500 lbf, 36 Vdc



# Electrak 10

12, 24 and 36 Vdc - load up to 1500 lbf



» Ordering Key - see page 54

» Glossary - see page 57

» Electric Wiring Diagram - see page 38

## Standard Features and Benefits

- Robust, strong and reliable
- Withstands very harsh environments
- Stainless steel extension tube
- Highly efficient ball screw drive system
- Overload clutch for mid and end of stroke protection
- Motor with thermal switch
- Maintenance free

## General Specifications

Parameter	Electrak 10
Screw type	ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake	yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric 56 series 2984883 with terminal 2962987. Mating connector: 2973781 with terminal 2962573 (p/n 9100-448-001)
Certificates	CE optional*
Options	<ul style="list-style-type: none"> <li>• potentiometer*</li> <li>• manual override*</li> <li>• limit switches*</li> </ul>

\* Contact customer support

## Performance Specifications

Parameter		Electrak 10
Maximum load, dynamic / static	[lbf]	
D •• -05B5		500 / 3000
D •• -10(20)B5		1000 / 3000
Contact customer support		1500 / 3000
Speed, at no load / at maximum load	[in/sec]	
D •• -05B5		2.40 / 1.40
D •• -10B5 (high speed)		1.30 / 0.80
D •• -20B5 (standard speed)		0.60 / 0.45
Available input voltages	[Vdc]	12, 24, 36
Standard stroke lengths	[in]	4, 8, 12, 18*, 24*
Operating temperature limits	[°F]	-15 – +150
Full load duty cycle @ 77 °F	[%]	25
End play, maximum	[in]	0.04
Restraining torque	[lbf-in]	100
Lead cross section	[AWG]	14
Lead length	[in]	7.5
Protection class		IP66


\* Contact customer support

## Compatible Controls

Control model	See page
DPDT switch	43

# Electrak 10

12, 24 and 36 Vdc - load up to 1500 lbf

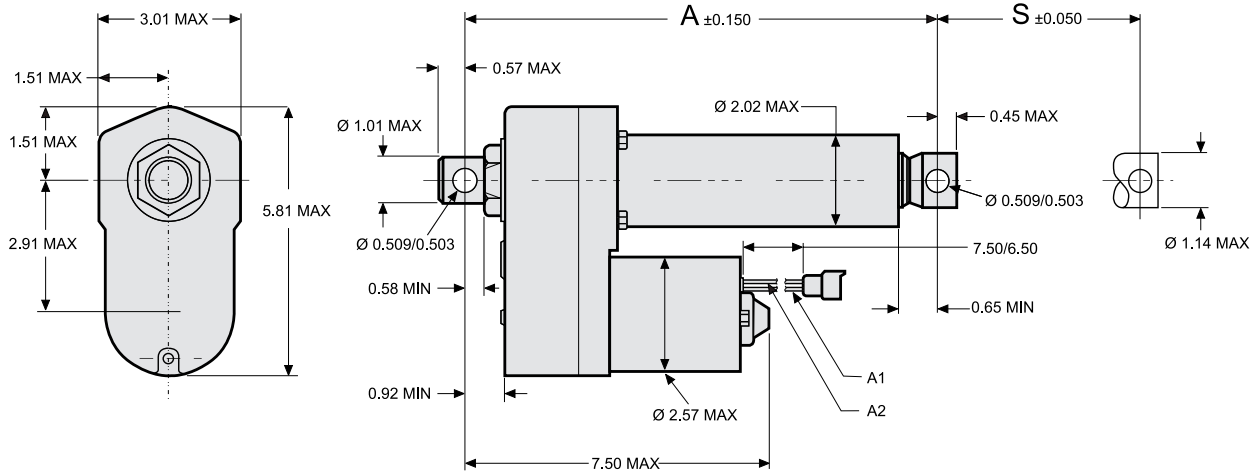


S: stroke  
 A: retracted length  
 A1: yellow lead  
 A2: red lead

Stroke (S)	[inch]	4	8	12
Retracted length (A)	[inch]	11.9	15.9	19.9
Weight	[lb]	11.3	12.0	12.7

## Performance Diagrams


Life vs. Load

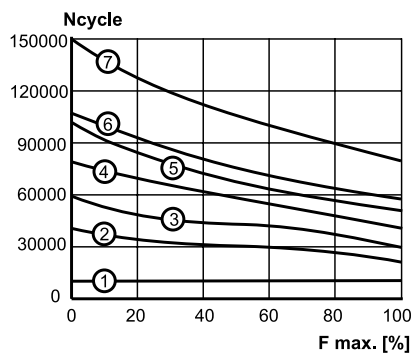

Ncycle: life in number of cycles  
 (one cycle = extend and retract)  
 F max: percent of maximum rated load

- 1: all models using the clutch at the end of stroke
- 2: 1000 lbf, 12 inch stroke
- 3: 1000 lbf, 8 inch stroke
- 4: 500 lbf, 12 inch stroke
- 5: 1000 lbf, 4 inch stroke
- 6: 500 lbf, 8 inch stroke
- 7: 500 lbf, 4 inch stroke


Duty Cycle vs. Load

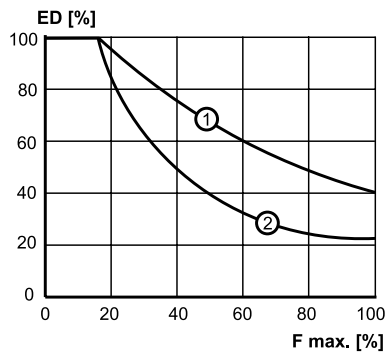

ED: duty cycle in percent at 77° F  
 F max: percent of maximum rated load

- 1: 1000 lbf, standard speed
- 2: 500 lbf

Speed and Current vs. Load

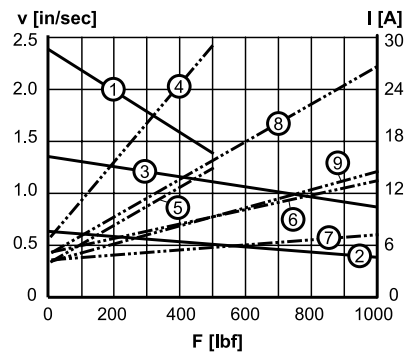

V: speed I: current F: load

- 1: speed 500 lbf
- 2: speed 1000 lbf, standard speed
- 3: speed 1000 lbf, high speed
- 4: current 500 lbf, 12 Vdc
- 5: current 500 lbf, 24 Vdc
- 6: current 1000 lbf, 12 Vdc, standard speed
- 7: current 1000 lbf, 24 Vdc, standard speed
- 8: current 1000 lbf, 12 Vdc, high speed
- 9: current 1000 lbf, 24 Vdc, high speed

# Electrak Pro

12 and 24 Vdc - load up to 1000 lbf



» Ordering Key - see page 54

» Glossary - see page 57

Electric Wiring Diagram - see page 38

## Standard Features and Benefits

- Designed for heavy duty operation, IP66 protection
- Optimized overall envelope with minimal retracted length
- Durable and corrosion resistant aluminum housing
- Cover tube and extension tube in stainless steel<sup>2/3</sup>
- Acme or ball screw models
- Maintenance free
- Electronic load monitoring (ELM)
- Manual override
- Wide range of options

## General Specifications

Parameter	Electrak Pro
Screw type	acme or ball
Internally restrained	no / yes <sup>1</sup>
Manual override	yes
Dynamic braking	yes*
Holding brake	
acme screw models	no, self-locking
ball screw models	yes
End of stroke protection	electronic load monitoring
Mid stroke protection	electronic load monitoring
Motor protection	electronic load monitoring
Motor connection	connector integrated in housing
Motor connector	Delphi Metri-Pack 280
Certificates	CE <sup>7</sup>
Options (all voltages) <sup>8</sup>	<ul style="list-style-type: none"> <li>• linear potentiometer<sup>1/2</sup></li> <li>• encoder<sup>7</sup></li> <li>• programmable end of stroke<sup>1/2</sup></li> <li>• end of stroke indication outputs<sup>1/2</sup></li> <li>• ELM trip indication output</li> <li>• IP67<sup>3</sup></li> <li>• black paint</li> <li>• low current power switching</li> <li>• signal follower input<sup>1/2</sup></li> </ul>

## Performance Specifications

Parameter		Electrak Pro
Maximum load, dynamic / static	[lbf]	
PR •• 02-2A65 (acme screw)		250 / 500
PR •• 05-4A65 (acme screw)		500 / 1000
PR •• 07-8A65 (acme screw)		750 / 1500
PR •• 05-2B65 (ball screw)		500 / 1000
PR •• 10-4B65 (ball screw)		1000 / 2000
Speed, at no load / at maximum load	[in/sec]	
PR •• 02-2A65 (acme screw)		2.00 / 1.70
PR •• 05-4A65 (acme screw)		1.10 / 0.90
PR •• 07-8A65 (acme screw)		0.56 / 0.49
PR •• 05-2B65 (ball screw)		2.00 / 1.50
PR •• 10-4B65 (ball screw)		1.00 / 0.80
Available input voltages <sup>6</sup>	[Vdc]	12, 24
Standard stroke lengths <sup>4</sup>	[in]	2, 4, 6, 8, 12
Operating temperature limits	[°F]	-40 – +185
Full load duty cycle @ 77 °F	[%]	25
End play, maximum	[in]	0.04
Restraining torque	[lbf-in]	150 / 0 <sup>1</sup>
Protection class		IP66

## Compatible Controls<sup>7</sup>

Control model	See page
DPDT switch	43

<sup>1</sup> Anti-rotation option. When the anti-rotation option is being used, the front adapter cross hole can't be freely rotated. Instead the front cross hole must be ordered in standard position (shown in the drawing) or rotated 90°.

<sup>2</sup> Control options with linear potentiometer (options "L", "P", "R" and "K") requires an aluminum cover tube. Also the anti-rotation option requires an aluminum cover tube. Anti-rotation is required for ball screw units with above options, but optional for acme screw units. Note that a programming unit is necessary for the programmable limit switch option, see page 48.

<sup>3</sup> IP67 requires the mating connector be installed and the factory sealing, including the manual override cover, must not be compromised.

<sup>4</sup> Consult customer support for longer stroke lengths.

<sup>5</sup> Consult customer support for encoder output data.

<sup>6</sup> Electrak Pro requires, besides the correct input voltage, at least a 600 W power supply or an automotive/marine battery to function properly.


<sup>7</sup> Contact customer support for CE compliant models.

<sup>8</sup> For more information about the different options, contact customer support or download the installation manual at [www.danahermotion.com/electrakpro](http://www.danahermotion.com/electrakpro).

\* Dynamic braking when ELM is tripped, or with the following options: signal following, programmable limits, low level switching.

# Electrak Pro

12 and 24 Vdc - load up to 1000 lbf

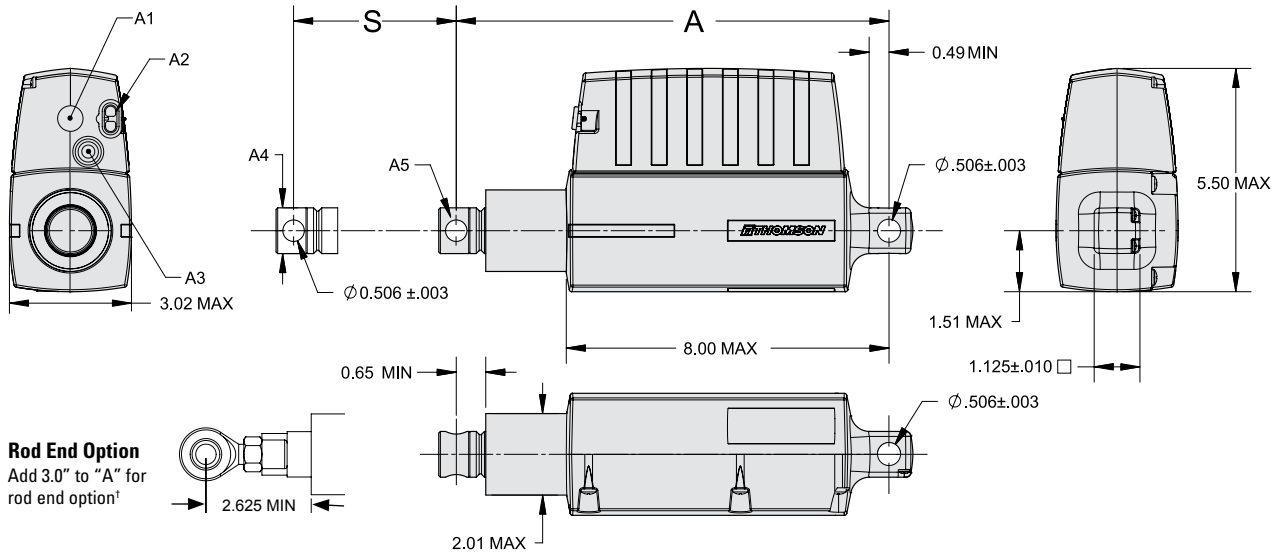

S: stroke  
 A: retracted length, add 3.0 inches for rod end option  
 A1: manual override cover (manual override requires 5 mm or 3/16 hexagon key to operate)  
 A2: motor connector


A3: knock out plug for signal wire exit  
 A4: adapter / extension tube diam. for 250 - 1000 lbf models = 1.125  $\pm$  0.005 in.  
 A5: plated steel front adapter cross hole shown in standard position  
 †: Dependant on how far customer threads in the rod end. 2.8" minimum

Stroke (S)	[inch]	2	4	6	8	12
Retracted length, acme screw models (A)	[inch]	9.46	10.2	12.2	14.2	18.2
Retracted length, ball screw models (A)	[inch]	9.46	11.46	13.46	15.46	19.46
Weight, acme screw models	[lb]	6.6	6.7	7.2	7.6	8.5
Weight, ball screw models	[lb]	7.5	7.6	8.0	8.3	9.1
Potentiometer approx. resistance change*	[ohm/in]	1453	919	672	1060	744
Potentiometer total resistance	[kohm]	5	5	5	10	10

\* Potentiometer is optional.

## Performance Diagrams

Acme Screw Models  
 Speed and Current vs. Load

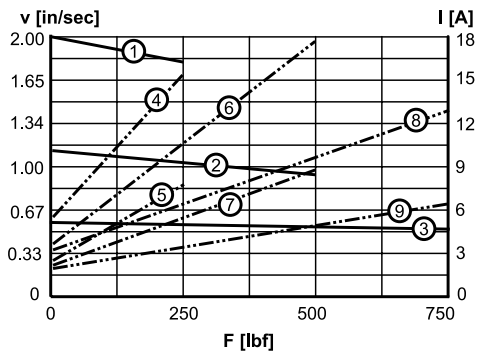


V: speed  
 I: current  
 F: load

1: speed 250 lbf  
 2: speed 500 lbf  
 3: speed 750 lbf

4: current 12 Vdc, 250 lbf  
 5: current 24 Vdc, 250 lbf  
 6: current 12 Vdc, 500 lbf  
 7: current 24 Vdc, 500 lbf  
 8: current 12 Vdc, 750 lbf  
 9: current 24 Vdc, 750 lbf

Ball Screw Models  
 Speed and Current vs. Load

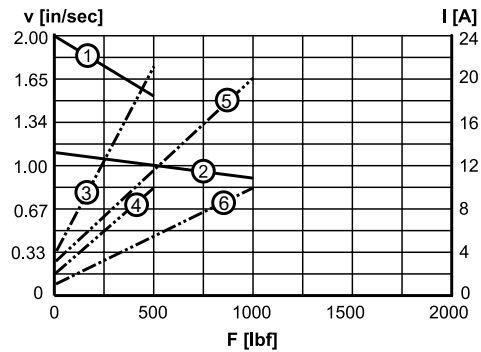

V: speed  
 I: current  
 F: load

1: speed 500 lbf  
 2: speed 1000 lbf

3: current 12 Vdc, 500 lbf  
 4: current 24 Vdc, 500 lbf  
 5: current 12 Vdc, 1000 lbf  
 6: current 24 Vdc, 1000 lbf

# Electrak PPA-AC

115 and 230 Vac - load up to 1500 lbf



## Standard Features and Benefits

- Strong and versatile heavy duty actuator
- High duty cycle
- Highly efficient ball screw drive system
- Overload clutch for mid and end of stroke protection
- Stroke lengths up to 36 inch
- Motor with thermal switch
- Integrated motor capacitor
- Maintenance free
- Large range of options

## General Specifications

Parameter	Electrak PPA-AC
Screw type	ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake	yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads
Motor connector	no
Certificates	CE optional*** RoHS compliant
Options	<ul style="list-style-type: none"> <li>• end of stroke limit switches</li> <li>• potentiometer</li> <li>• encoder</li> <li>• protective bellows</li> <li>• anti-coast brake *</li> <li>• electrical brake **</li> <li>• manual override***</li> </ul>

\* External capacitor, which is supplied with the actuator, is required to run actuators with anti-coast brake option. See page 50 for capacitor dimensions.

\*\* Only possible on 115 Vac models \*\*\* Contact customer support

» Ordering Key - see page 55

» Glossary - see page 57

» Electric Wiring Diagram - see page 40

## Performance Specifications

Parameter	PPA-AC
Maximum load, dynamic / static PPA •• -18B65 PPA •• -58B65	[lbf] 500 / 3000 1500 / 3000
Speed, at no load / at maximum load PPA11-18B65 PPA22-18B65 PPA •• -58B65	[in/sec] 0.63 / 0.60 0.55 / 0.50 0.17 / 0.17
Available input voltages Single phase	[Vac] 115, 230
Input frequency 1 × 115 Vac model 1 × 230 Vac model	[Hz] 50/60 50/60
Standard stroke lengths	[in] 4, 8, 12, 18, 24, 36
Operating temperature limits	[°F] -15 – +150
Full load duty cycle @ 77 °F	[%] 30
End play, maximum	[in] 0.040
Restraining torque PPA •• -18B65 PPA •• -58B65	[lbf-in] 100 200
Lead cross section	[AWG] 18
Lead length	[in] 19.5
Protection class	IP22


## Compatible Controls

Control model	See page
DPDT switch	43



# Electrak PPA-AC

115 and 230 Vac - load up to 1500 lbf

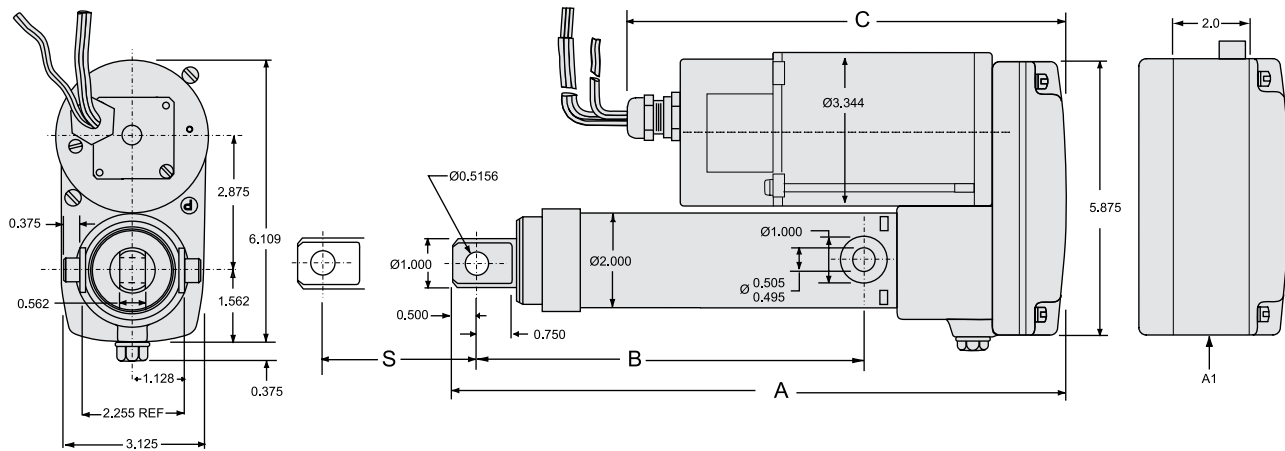


S: stroke  
 A: retracted length  
 B: retracted length to trunnions  
 C: motor length  
 A1: housing dimensions for limit switch, encoder or potentiometer options

<b>Stroke (S)</b>	[inch]	4	8	12	18	24	36
<b>Retracted length (A) without options</b>	[inch]	13.7	17.7	21.7	29.7	35.7	47.7
<b>Retracted length (A) with limit switch, encoder or potentiometer</b>	[inch]	15.7	19.7	23.7	31.7	37.7	49.7
<b>Retracted length (B)</b>	[inch]	8.8	12.8	16.8	24.8	30.8	42.8
<b>Motor length (C) without brake</b>	[inch]	9.5	9.5	9.5	9.5	9.5	9.5
<b>Motor length (C) with anti-coast brake</b>	[inch]	7.5	7.5	7.5	7.5	7.5	7.5
<b>Motor length (C) with electrical brake</b>	[inch]	11.0	11.0	11.0	11.0	11.0	11.0
<b>Weight</b>	[lb]	13.2	14.8	16.5	19.1	21.6	27.0
<b>Weight with electrical brake</b>	[lb]	14.6	16.2	17.9	20.5	23.0	28.4
<b>Add on weight for limit switch, encoder or potentiometer</b>	[lb]	1.7	1.7	1.7	1.7	1.7	1.7

## Performance Diagrams

### Speed and Current vs. Load

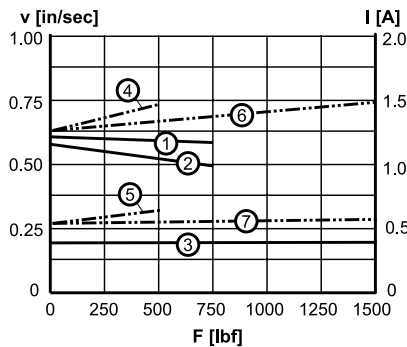

V: speed I: current F: load

- 1: speed 500 lbf, 115 Vac
- 2: speed 500 lbf, 230 Vac
- 3: speed 1500 lbf
- 4: current 500 lbf, 115 Vac
- 5: current 500 lbf, 230 Vac
- 6: current 1500 lbf, 115 Vac
- 7: current 1500 lbf, 230 Vac

# Electrak 5

115 and 230 Vac - load up to 1500 lbf



## Standard Features and Benefits

- Robust, strong and reliable
- Stainless steel extension tube
- Highly efficient ball screw drive system
- Overload clutch for mid and end of stroke protection
- Heavy duty motor with thermal switch
- Anti-coast brake for repeatable positioning
- Maintenance free

## General Specifications

Parameter	Electrak 5
Screw type	ball
Internally restrained	no
Manual override	no, optional
Dynamic braking	no
Holding brake	yes
End of stroke protection	overload clutch
Mid stroke protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads
Certificates	UL, CSA, CE optional*
Options	<ul style="list-style-type: none"> <li>• potentiometer*</li> <li>• manual override*</li> <li>• limit switches*</li> </ul>

\* Contact customer support

» Ordering Key - see page 55

» Glossary - see page 57

» Electric Wiring Diagram - see page 40

## Performance Specifications

Parameter	Electrak 5
Maximum load, dynamic / static [lbf]	
A •• -05B5	500 / 2500
A •• -10B5	1000 / 2500
Contact customer support	1500 / 2500
Speed, at no load / at maximum load [in/sec]	
A •• -05B5	2.10 / 1.70
A •• -10B5	1.10 / 1.00
Available input voltages** [Vac]	
Single phase	115, 230
Input frequency [Hz]	
1 × 120 Vac model	60
1 × 230 Vac model	50/60
Standard stroke lengths [in]	4, 8, 12, 18, 24
Operating temperature limits [°F]	-15 – +150
Full load duty cycle @ 77 °F [%]	25
Maximum on time [sec]	45
End play, maximum [in]	0.04
Restraining torque [lbf-in]	100
Lead cross section [AWG]	18
Cable length [in]	23
Protection class	IP55

\*\* Capacitor required to run the actuator. 115 Vac = 35 µF, p/n 9200-448-002, 230 Vac = 10 µF, p/n 9200-448-003.


## Compatible Controls

Control model	See page
DPDT switch	43
MCS-2041***	44

\*\*\* This control include a capacitor making an external capacitor redundant.

# Electrak 5

115 and 230 Vac - load up to 1500 lbf

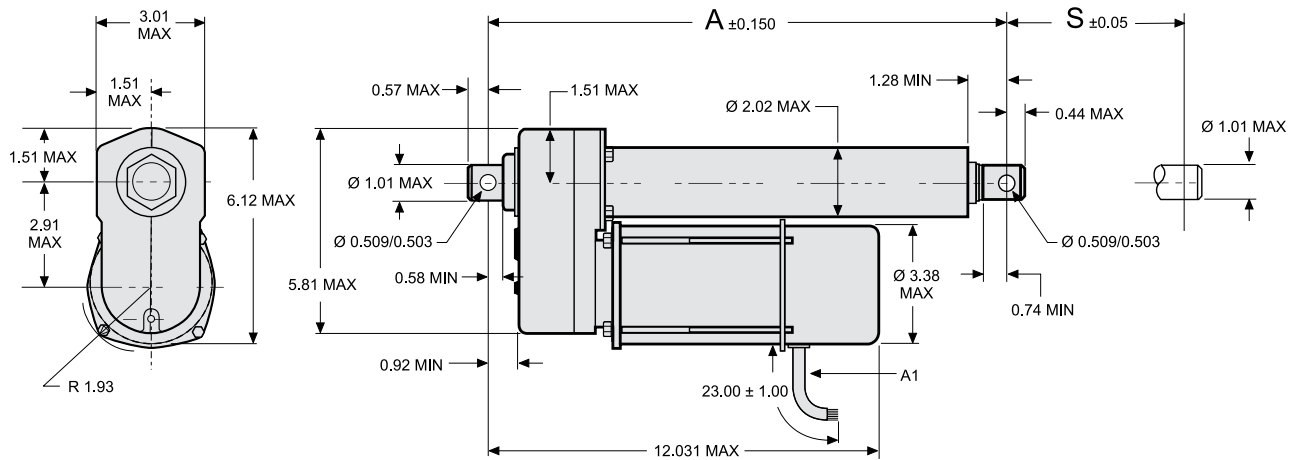


S: stroke  
A: retracted length  
A1: cable

Stroke (S)	[inch]	4	8	12	18	24
Retracted length (A)	[inch]	15.0	19.0	23.0	29.0	35.0
Weight	[lb]	14.4	15.2	16.1	17.3	18.6


## Performance Diagrams

Life vs. Load

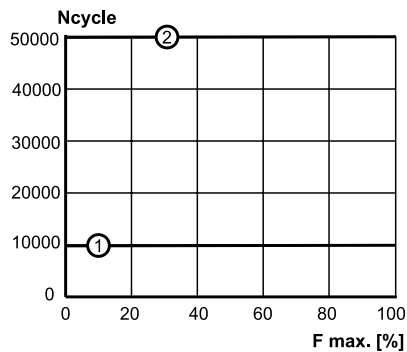


Ncycle: life in number of cycles  
(one cycle = extend and retract)  
F max: percent of maximum rated load  
1: all models using the clutch at the end of stroke  
2: all models using the anti-coast brake at the end of stroke only

Duty Cycle vs. Load

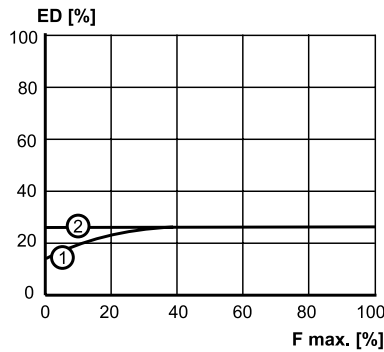

ED: duty cycle in percent at 77° F  
F max: percent of maximum rated load  
1: 50 Hz input frequency  
2: 60 Hz input frequency

Speed and Current vs. Load

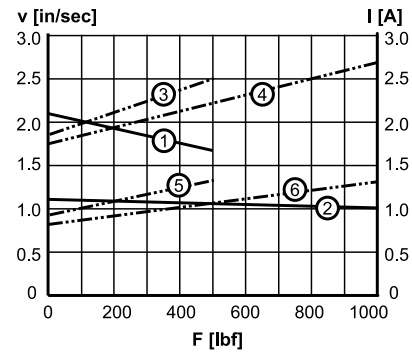

V: speed I: current F: load  
1: speed 500 lbf  
2: speed 1000 lbf  
3: current 500 lbf, 115 Vac  
4: current 1000 lbf, 115 Vac  
5: current 500 lbf, 230 Vac  
6: current 1000 lbf, 230 Vac

# Electrak 205

115 and 230 Vac - load up to 1500 lbf



## Standard Features and Benefits

- Robust, strong and reliable
- Stainless steel extension tube
- Highly efficient ball screw drive system
- Electrical brake for accurate positioning
- Motor with thermal switch
- Adjustable end of stroke limit switches
- Potentiometer
- Universal mounting clamp for tube mounting available
- Maintenance free

## General Specifications

Parameter	Electrak 205
Screw type	ball
Internally restrained	no
Manual override	no
Dynamic braking	no
Holding brake	yes
End of stroke protection	adjustable limit switches
Mid stroke protection	no
Motor protection	auto reset thermal switch
Motor connection	terminal strip in the housing
Cable entrance	1/2" NPT
Certificates	none
Options	none

## Performance Specifications

Parameter		Electrak 205
Maximum load, dynamic	[lbf]	
ALP •• -05		500
ALP •• -10		1000
Contact customer support		1500
Maximum load, static tension	[lbf]	
ALP •• -••		4000
Maximum load, static compression	[lbf]	
ALP •• -•• (stroke under 24 inch)		4000
ALP •• -•• (24 inch stroke)		2500
Speed, at no load / at maximum load	[in/sec]	
ALP •• -05		2.05 / 1.75
ALP •• -10		1.10 / 0.90
Available input voltages*	[Vac]	
Single phase		115, 230
Input frequency	[Hz]	
1 × 120 Vac model		60
1 × 230 Vac model		50/60
Standard stroke lengths	[in]	4, 8, 12, 18, 24
Operating temperature limits	[°F]	-15 – +150
Full load duty cycle @ 77 °F	[%]	25
End play, maximum	[in]	0.035
Restraining torque	[lbf-in]	100
Max. terminal strip lead cross section	[AWG]	14
Protection class		IP55
Potentiometer	[kOhm]	10
Potentiometer resistance change	[ohm/in]	385

\* Capacitor required to run the actuator. 115 Vac = 35 µF, p/n 9200-448-002,  
230 Vac = 10 µF, p/n 9200-448-003.  
Universal mounting kit. 9200-448-006

## Compatible Controls

Control model	See page
DPDT switch	43
MCS-2051**	45

\*\* This control include a capacitor making an external capacitor redundant.


» Ordering Key - see page 55

» Glossary - see page 57

» Electric Wiring Diagram - see page 41

# Electrak 205

115 and 230 Vac - load up to 1500 lbf

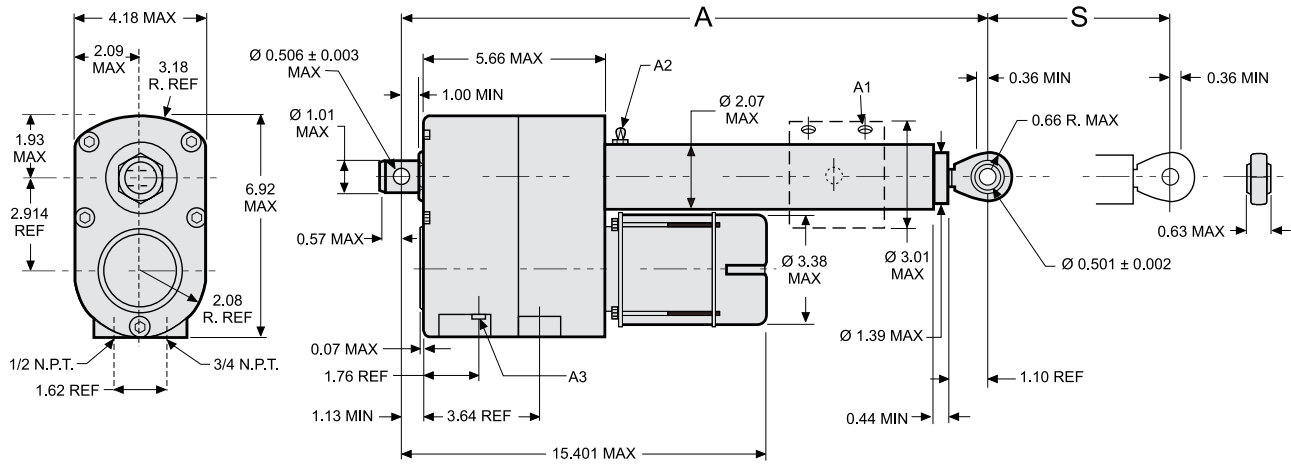


S: stroke  
 A: retracted length  
 A1: universal mounting clamp  
 A2: grease fitting  
 A3: limit switch adjustment

Stroke (S)	[inch]	4	8	12	18	24
Retracted length (A)	[inch]	22.2	26.2	30.2	36.2	42.2
Weight	[lb]	25.5	27.5	29.5	32.5	35.5

## Performance Diagrams


Life vs. Load

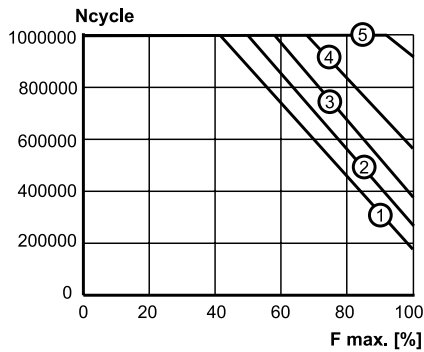

Ncycle: life in number of cycles  
 (one cycle = extend and retract)  
 F max: percent of maximum rated load


- 1: 1000 lbf, 24 inch stroke
- 2: 1000 lbf, 18 inch stroke
- 3: 1000 lbf, 12 inch stroke
- 4: 1000 lbf, 8 inch stroke
- 5: 1000 lbf, 4 inch stroke

Duty Cycle vs. Load

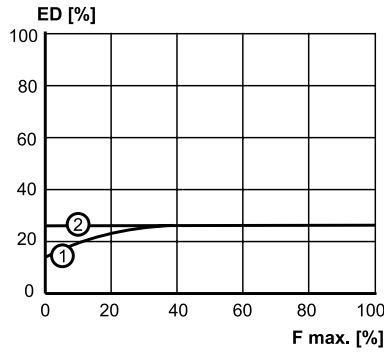

ED: duty cycle in percent at 77° F  
 F max: percent of maximum rated load  
 1: 50 Hz input frequency  
 2: 60 Hz input frequency

Speed and Current vs. Load

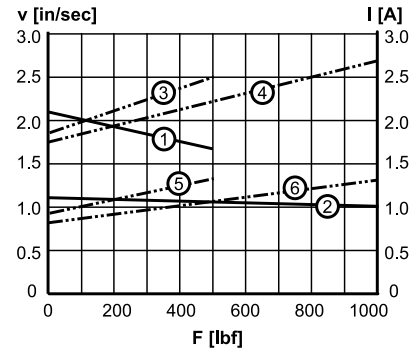

V: speed I: current F: load  
 1: speed 500 lbf  
 2: speed 1000 lbf  
 3: current 500 lbf, 115 Vac  
 4: current for 1000 lbf, 115 Vac  
 5: current 500 lbf, 230 Vac  
 6: current 1000 lbf, 230 Vac

# Electrak Non-driven Actuator PPA-M

» Ordering Key - see page 56

» Glossary - see page 57

Load up to 1500 lbf



## Standard Features and Benefits

- Actuator with double input shafts to which a customer supplied motor or/and an intermediate shaft can be mounted
- Can be operated manually
- Robust and versatile
- Withstands very harsh environments
- Highly efficient ball screw drive system
- Holding brake prevents back driving
- Trunnion to clevis mounting
- Maintenance free

## General Specifications

Parameter	Electrak PPA-M
Screw type	ball
Internally restrained	no
Manual override	no*
Holding brake	yes
End of stroke protection	no
Mid stroke protection	no
Certificates	–
Options	protective bellows


\* Either of the two input shafts can be used for manual operation if both shafts are not connected to a motor or an intermediate shaft.

## Performance Specifications

Parameter		PPA-M
Maximum load, dynamic / static	[lbf]	1500 / 3000
Maximum speed at max. load	[in/sec]	0.33
Maximum input torque	[lbf-in]	80
Maximum input speed	[rpm]	100
Standard stroke lengths	[in]	4, 8, 12, 18, 24, 36
Operating temperature limits	[°F]	-15 – +150
End play, maximum	[in]	0.04
Restraining torque	[lbf-in]	200

# Electrak Non-driven Actuator PPA-M

Load up to 1500 lbf

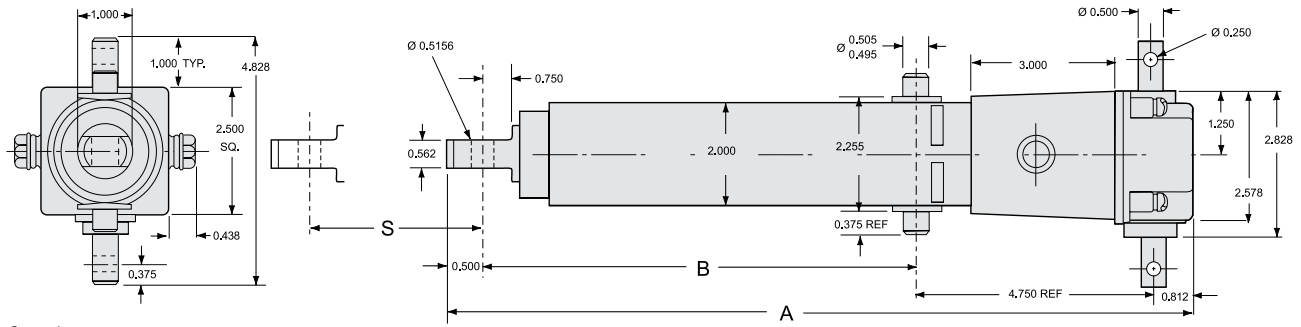


S: stroke  
 A: retracted length  
 B: retracted length to trunnions

Stroke (S)	[inch]	4	8	12	18	24	36
Retracted length (A)	[inch]	14.8	18.8	22.8	30.8	36.8	48.8
Retracted length to trunnions (B)	[inch]	8.8	12.8	16.8	24.8	30.8	42.8
Weight	[lb]	7.6	9.2	10.6	13.5	16.0	21.4


## Synchronous Operation

Two or more PPA-M actuators can easily be mechanically linked for synchronous operation. They can either be driven directly by motor (1) or by the PPA synchronous operation kit (2). Intermediate shafts, couplings and motors (white details) are supplied by the customer. For more information about the PPA synchronous operation kit, see Accessories and Spare Parts on page 49.

### 1. With motor

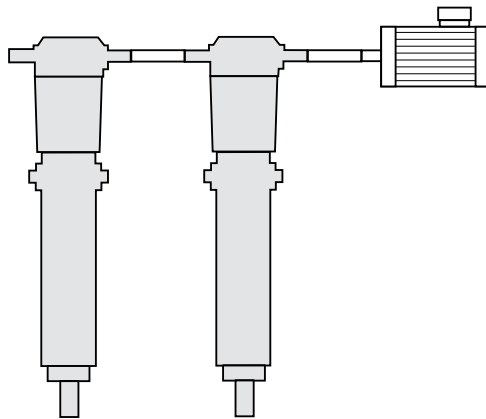

### 2. With PPA synchronous operation kit

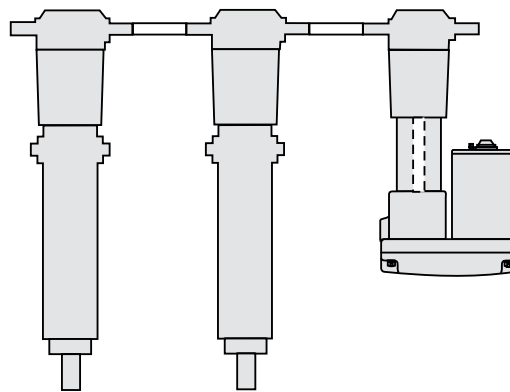

# Rotary Actuator DGB

12, 24 and 36 Vdc - load torque up to 100 lbf-in

» Ordering Key - see page 56

» Glossary - see page 57

» Electric Wiring Diagram - see page 38



## Standard Features and Benefits

- Rotary actuators for industrial and outdoor use
- Easy and fast clevis mounting
- Overload clutch
- Thermal protected motor
- Manual override or dual output shafts as option

## General Specifications

Parameter	DGB
Manual override	no
Dynamic braking	no
Holding brake	yes
Overload protection	overload clutch
Motor protection	auto reset thermal switch
Motor connection	flying leads and connector
Motor connector	Packard Electric 56 series 2984883 with terminal 2962987. Mating connector: 2973781 with terminal 2962573 (p/n 9100-448-001)
Certificates	CE optional*
Options	<ul style="list-style-type: none"> <li>• manual override</li> <li>• dual output shafts</li> <li>• other speeds*</li> </ul>

\* Contact customer support

## Performance Specifications

Parameter		DGB
Maximum load torque	[lbf-in]	100
Speed, at no load / at maximum load	[rpm]	200 / 80
D •• -21GB		140 / 75
D •• -30GB <sup>1</sup>		
Available input voltages	[Vdc]	12, 24, 36
Weight	[lb]	
D •• - •••• - XXCL		7.7
D •• - •••• - XXMO		7.7
D •• - •••• - XXDS		7.7
Operating temperature limits	[°F]	-15 – +150
Full load duty cycle @ 77 °F	[%]	25
Lead cross section	[AWG]	14
Lead length	[in]	7.0
Protection class		IP56

## Compatible Controls

Control model	See page
DPDT switch	43


<sup>1</sup> D •• -30GB is not available for 36 Vdc.




# Rotary Actuator DGB

12, 24 and 36 Vdc - load torque up to 100 lbf-in


D •• - 21GB-XXCL, D •• - 30GBXXCL (clevis mount)

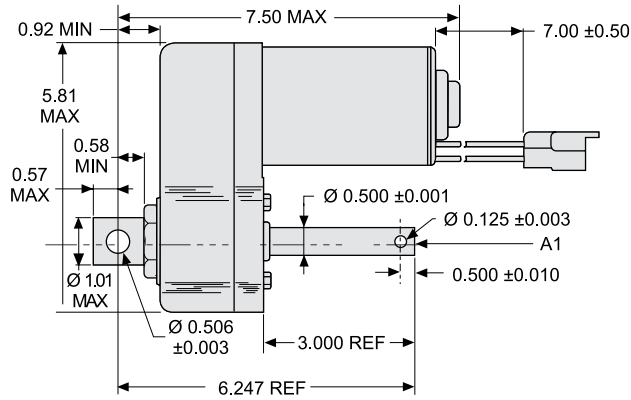

D •• - 21GBXXMO (manual override)

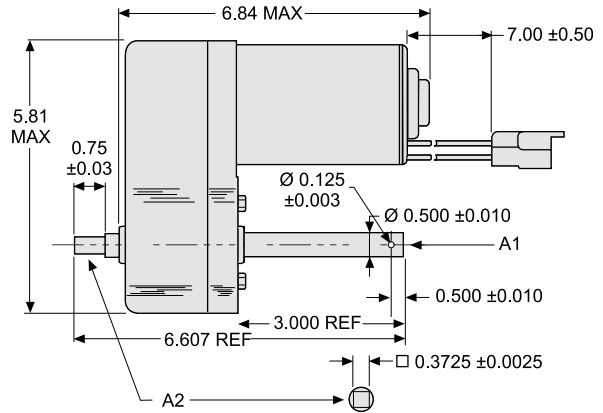


D •• - 21GB-XXDS (dual output shafts)

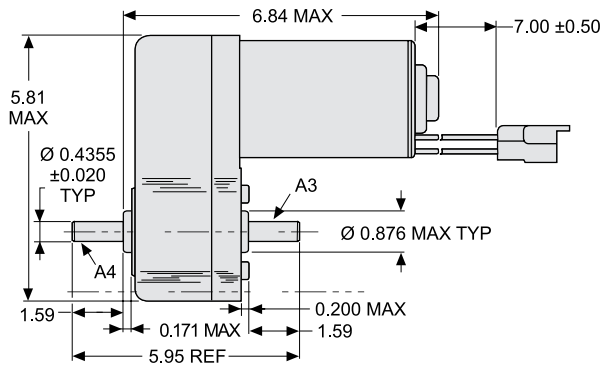

A1: output shaft  
A2: shaft for manual override  
A3: first output shaft  
A4: second output shaft

## Performance Diagrams

### Speed and Current vs. Load

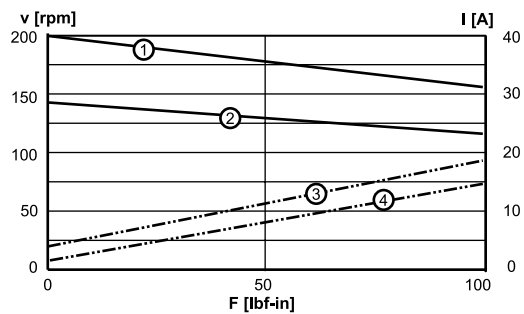

V: speed I: current F: load

- 1: speed D12-21GB
- 2: speed D12-30GB
- 3: current D12-21GB
- 4: current D12-30GB


Contact customer support for data on 24 and 36 Vdc models (D •• -30GB is not available for 36 Vdc).

www.thomsonlinear.com

# Electrical Wiring Diagrams


## DC-actuators

### Electrak 1, 2,10 and DGB

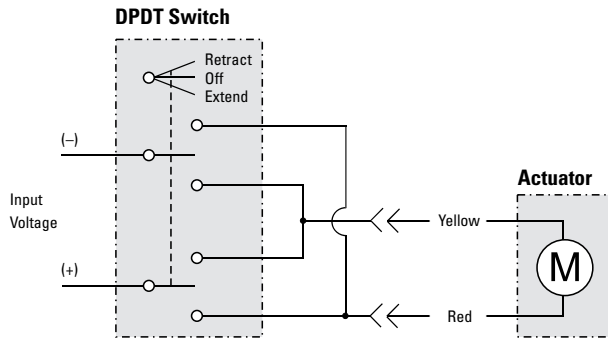


Connect the red lead to positive and yellow to negative to extend the actuator/rotate the output shaft in clockwise direction. Change polarity to retract the actuator/rotate the output shaft counterclockwise. Electrak 1 actuators should be protected from overload conditions by a customer provided fuse in the circuit (6 A for 12 Vdc and 3 A for 24 Vdc).

### Electrak 050

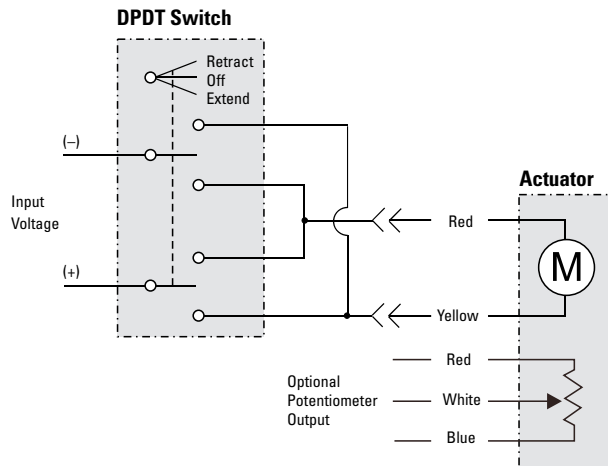


Connect the yellow lead to positive and red to negative to extend the actuator. Change polarity to retract the actuator. The potentiometer output has 0 ohm between white and red when the actuator is fully retracted.

### Electrak 1SP

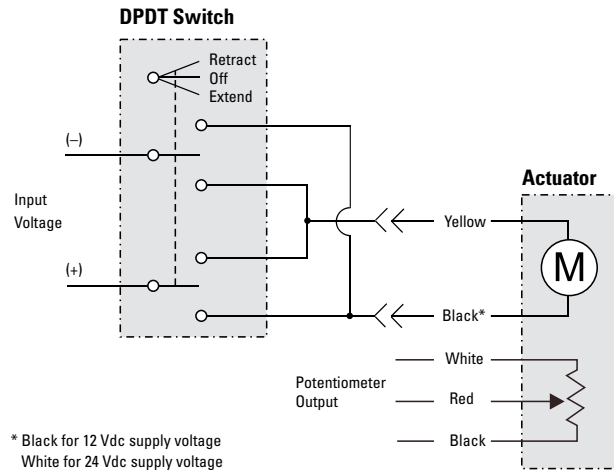

Connect the black or white\* lead to positive and yellow to negative to extend the actuator. Change polarity to retract the actuator. The potentiometer output has 0 ohm between white and red when the actuator is fully retracted. The actuator should be protected from overload conditions by a customer provided fuse in the circuit (6 A for 12 Vdc and 3 A for 24 Vdc).

### Electrak Pro

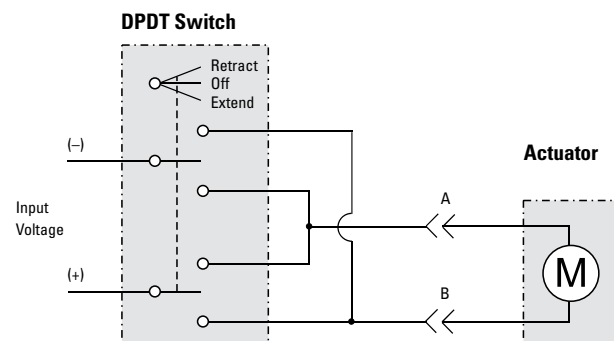


Connect pin B in the connector to positive and A to negative to extend the actuator. Change polarity to retract the actuator.

# Electrical Wiring Diagrams

## DC-actuators

### Electrak PPA-DC

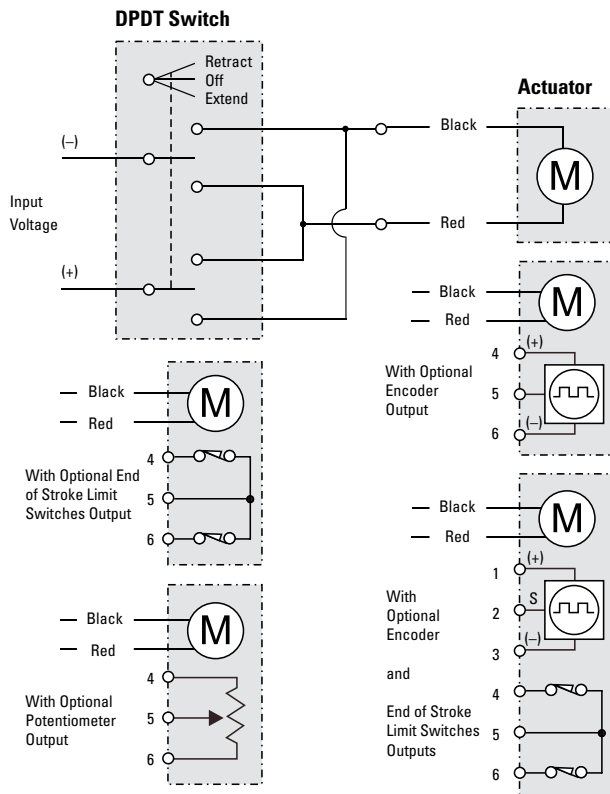


Connect the black lead to positive and red to negative to extend the actuator. Change polarity to retract the actuator. The encoder is supplied with 4.5 - 12 Vdc between terminals 4 or 1 and 6 or 3 and the pulse train signal is generated on terminal 5 or 2. The potentiometer output has 0 ohm between terminal 4 and 5 when the actuator is fully retracted.

# Electrical Wiring Diagrams


## AC-actuators

### Electrak PPA-AC

Without brake or with electrical brake (dotted wiring)

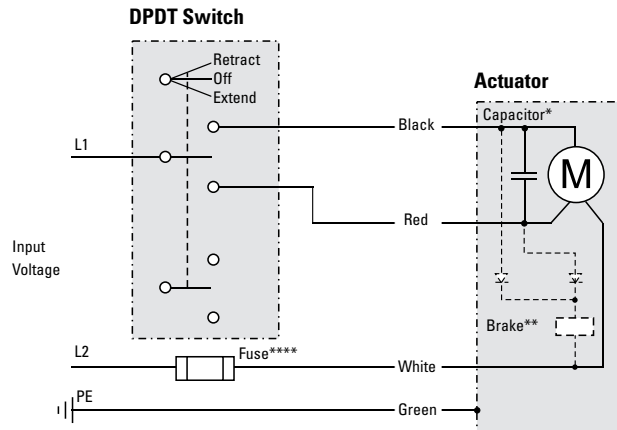


With anti coast brake

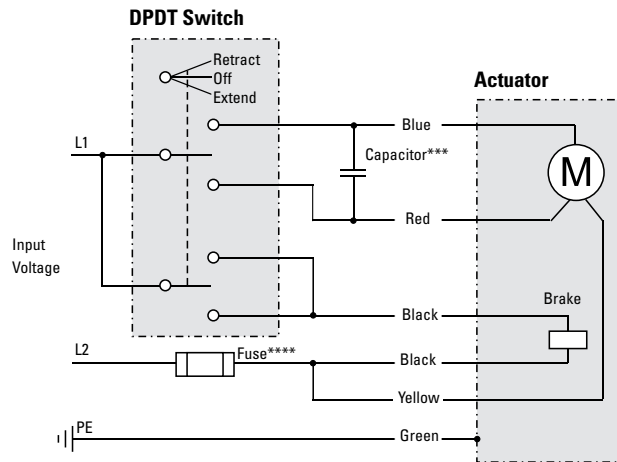

\* The actuator comes with prewired capacitor from factory.  
 \*\* Electrical brake only possible on 115 Vac models.  
 \*\*\* The capacitor is supplied with the actuator but needs to be fitted by the customer externally.  
 \*\*\*\* Supplied by customer.

For versions without brake or with electrical brake, connect the red lead to L1 and yellow to L2 to extend the actuator. Change L1 from red to black lead to retract the actuator. If the actuator is equipped with an electrical brake the internal wiring automatically lifts the brake when the motor is energized. For versions with anti coast brake, connect the red lead to L1 and yellow to L2 to extend the actuator. Change L1 from red to blue lead to retract the actuator. Release the anti-coast brake by connecting black leads to L1 and L2.

### Electrak 5

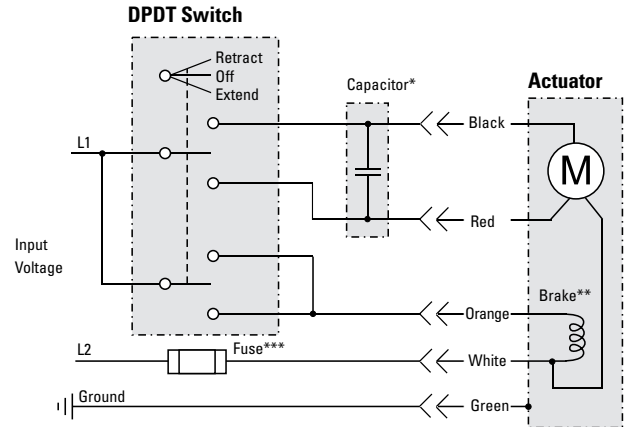


\* Capacitor required to run the actuator. 115 Vac = 35  $\mu$ F, p/n 9200-448-002, 230 Vac = 10  $\mu$ F, p/n 9200-448-003.  
 \*\* Anti coast brake.  
 \*\*\* Supplied by customer.

Connect the red lead to L1 and white to L2 to extend the actuator. Change L1 from red to black lead to retract the actuator. Release the anti coast brake by connecting orange lead to L1.

# Electrical Wiring Diagrams

## AC-actuators

### Electrak 205

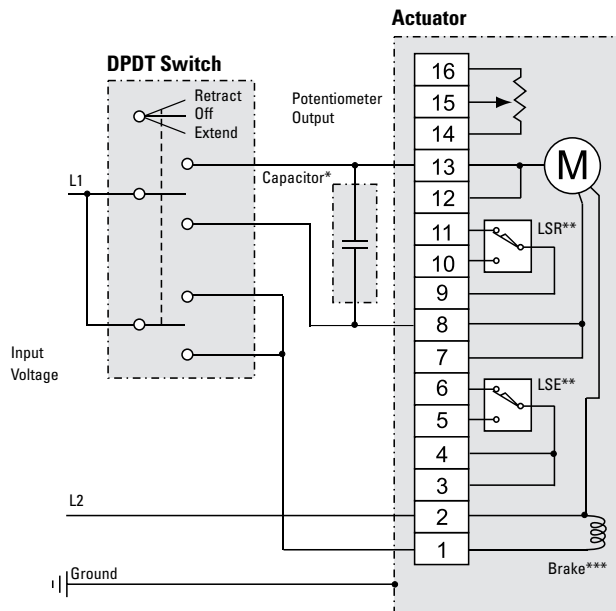

\* Capacitor required to run the actuator. 115 Vac = 35  $\mu$ F, p/n 9200-448-002,  
230 Vac = 10  $\mu$ F, p/n 9200-448-003.

\*\* LSR = end of stroke limit switch in retracted position,  
LSE = end of stroke limit switch in extended position.

\*\*\* Electrical brake.

The terminal strip is accessed by opening the rear cover of the actuator housing. Connect terminal 8 to L1 and terminal 2 to L2 to extend the actuator. Change L1 from terminal 8 to 13 to retract the actuator. Release the anti coast brake by connecting terminal 1 to L1. The potentiometer output is connected to terminals 14, 15 and 16.

# Actuator Controls

## General

Whether you plan to operate from a simple pushbutton or a programmable controller, Thomson controls can make your system easy to design, install and operate. Designed to drive actuators, the controls on the following pages are equipped either with easy to use terminal strips or plugs compatible with the actuators for ease of wiring. The controls have built in capacitors for AC models. Some of the controls have rocker switches and some touch sensitive membrane key pads while other have hand held pendants for operating the actuators. We also have other controls which may meet your particular needs. Contact customer service if you don't see the right control for your application.



# Actuator Controls

## Switches

### DPDT Switch



- Robust switch
- Double pole, double throw (DPDT)
- 15 A rating at 270 Vac
- Center “off”
- Two momentary contacts
- Wiring diagram on label


### Specifications

Parameter		DPDT Switch
Maximum voltage	[Vac]	270
Maximum current	[A]	15
Part number		830-8004-016


### Actuator Compatibility

Electrak 1, Electrak 1SP, Electrak 050, Electrak 2, Electrak PPA-DC, Electrak 10, Electrak Pro, Electrak PPA-AC, Electrak 5, Electrak 205, DGB

### Wiring Diagram



### Dimensions

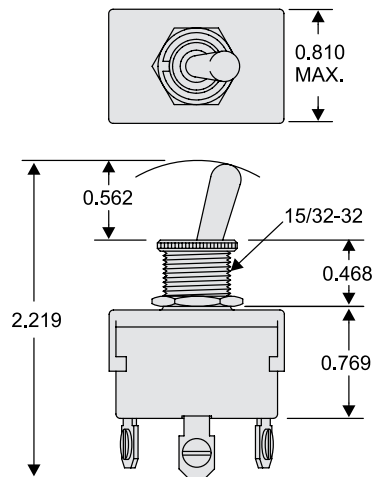

# Actuator Controls


## Electronic Controls

### Control MCS-2041



- Robust and compact metal enclosure with a front panel extend and retract rocker switch
- Prewired internal capacitor
- Fuse protects actuator in case of stalling caused by overload
- “Power On” light illuminates whenever power applied to the control
- Terminal strip for easy electrical connection
- The switch controls both the actuator motor and its anti coast brake to provide optimum performance

### Dimensions

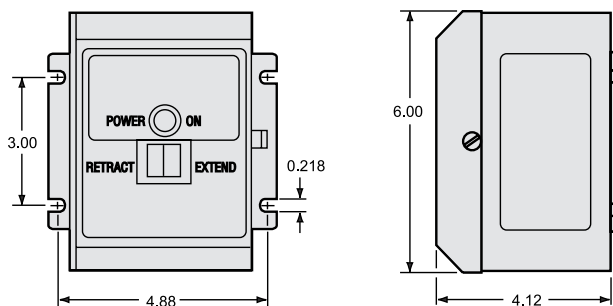


### Specifications

Parameter		MCS-2041
Input voltage	[Vac]	1 × 115
Input frequency	[Hz]	50/60
Output voltage	[Vac]	1 × 115
Maximum output current	[A]	15
Protection class		NEMA 1
Part number		6932-448-010

### Actuator Compatibility

Electrak 5

### Wiring Diagram

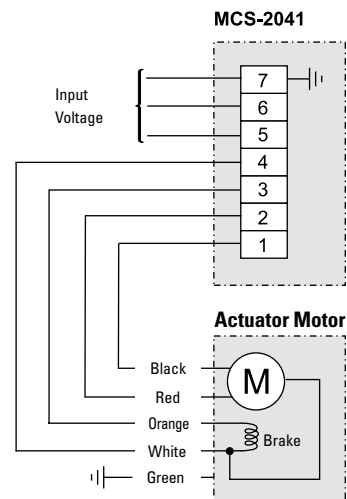



# Actuator Controls


## Electronic Controls

### Control MCS-2051



- Control designed to operate an Electrak 205 actuator
- Robust metal enclosure with front cover mounted membrane switches and LED indicator lights for extend, retract, jog, run and remote control
- Emergency stop/off pushbutton remains in position when activated
- LCD display shows the extension tube position
- Internal "Run" mode jumper which causes the actuator to reverse automatically upon reaching the extend end of stroke limit switch. Reverse motion continues until reaching the retract end of stroke limit switch
- The control provides an analog output signal for an external customer provided control/meter
- Inputs for external extend and retract switches
- Inputs for two external end of stroke limit switches
- Dynamic braking
- Terminal strip for easy electrical connection

### Dimensions

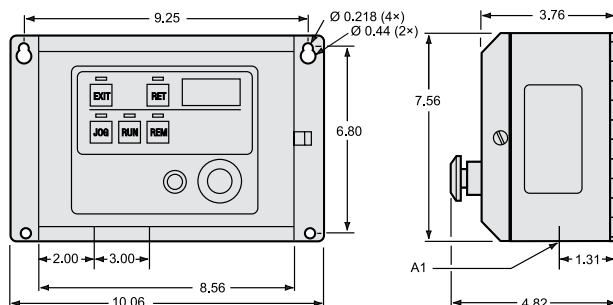

A1: Cable entrance, 1/2 inch standard conduit (2 x)


### Specifications

Parameter		MCS-2051
Input voltage	[Vac]	1 × 115
Input frequency	[Hz]	50/60
Output voltage	[Vac]	1 × 115
Maximum actuator output current	[A]	8
Analog output signal	[mA]	4 - 20
Protection class		NEMA1
Part number		6932-448-015

### Actuator Compatibility

Electrak 205

### Wiring Diagram

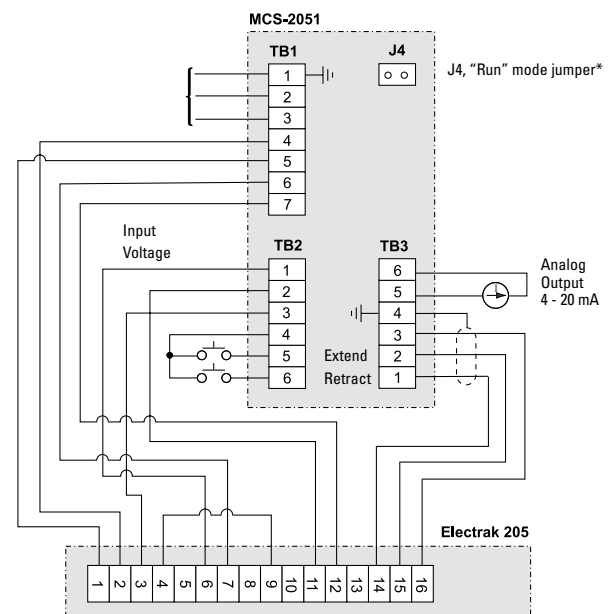

\* Inserting jumper J4 causes the actuator to reverse automatically upon reaching the extend end of stroke limit switch. Reverse motion continues until reaching the retract end of stroke limit switch.

# Actuator Controls

## Electronic Controls

### Electrak Pro Limit Switch Option Programming Unit




### Limit Switch Programming Unit


Designation	Part Number
Programming handset with cable	9200-101-051
Replacement programming handset only	278-9002
Replacement cable for actuators shipped before Sept 1,2010	954-9258
Replacement cable for actuators shipped after Sept 1,2010	954-9256

If an Electrak Pro actuator is equipped with the programmable limit switch option the programming unit is necessary to be able to program the limit switch positions. The unit is made of a plastic material.

#### 954-9258

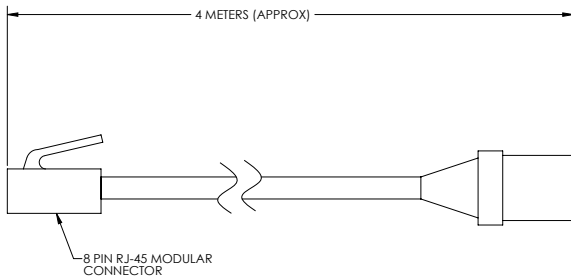

#### 954-9256

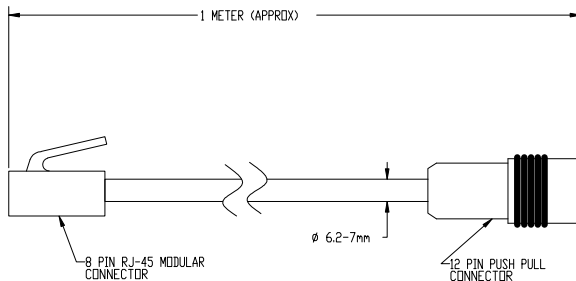

# Accessories and Spare Parts


## Mounting Components

### PPA Rear Clevis Mounting Kits


Designation	Compatible Actuators	Part Number
PPA rear clevis mounting kit for DC actuators	Electrak PPA-DC	7827320
PPA rear clevis mounting kit	Electrak PPA-DC, Electrak PPA-AC	7824295

The rear clevis mounting kits are attached to the tube of an Electrak PPA actuator allowing the actuator to be mounted clevis to clevis style. Note that one of the kits fits both PPA-DC and PPA-AC actuators while the other only fits PPA-DC actuators.

#### PPA Rear Clevis Mounting Kit

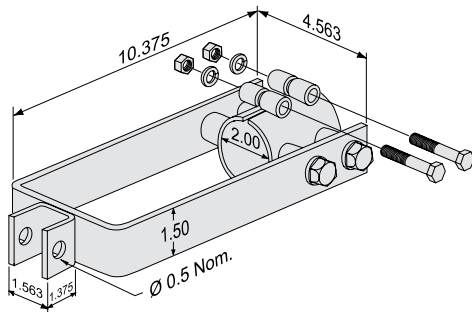

#### PPA Rear Clevis Mounting Kit for DC Actuators

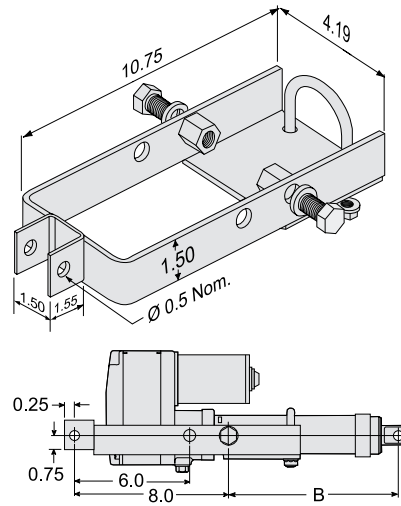

B: retracted length to trunnion, also see product pages.

# Accessories and Spare Parts


## Mounting Components

### Tube Mounting Kits


Designation	Compatible Actuators	Part Number
Electrak 205 tube mount	Electrak 205	9200-448-006
Electrak PPA tube mount - light duty 750 lbf	Electrak PPA-DC, Electrak PPA-AC	7822520
Electrak PPA tube mount - heavy duty 1500 lbf	Electrak PPA-DC, Electrak PPA-AC	7821783

The tube mounting kits work as a clamp that is mounted at any desired position along the actuator tube. Trunnion pins for the tube mount clamp are supplied and mounted by the customer.

#### Electrak 205 Tube Mount

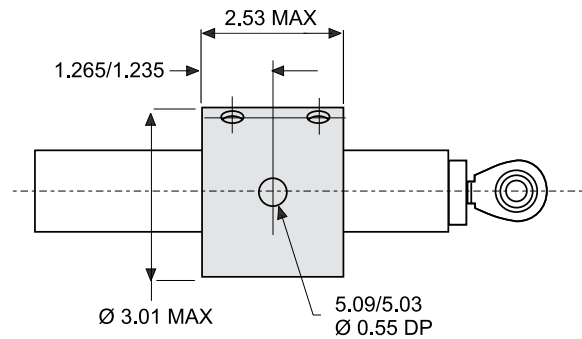


#### Electrak PPA Tube Mount - Light Duty 750 lbf

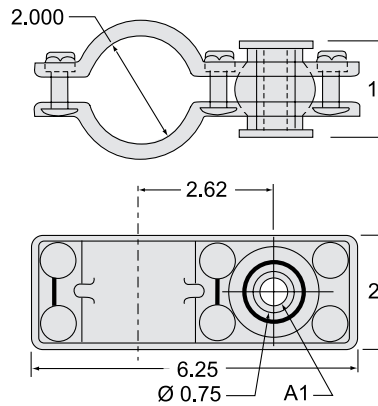

A1: hole diameter 0.50 with bushing.

#### Electrak PPA Tube Mount - Heavy Duty 1500 lbf

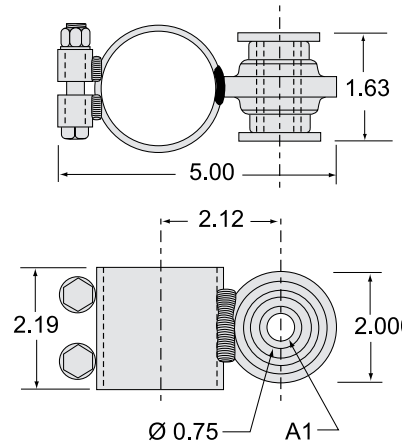

A1: hole diameter 0.50 with bushing.


# Accessories and Spare Parts

## Mounting Components

### Electrak PPA Synchronous Operation Kit

Designation	Part Number
PPA manual gearbox	5704305
PPA adapter	7820621
PPA drive tube kit	7825740
PPA motor-gearbox 12 Vdc, gear ratio 18:1	7820240
PPA motor-gearbox 12 Vdc, gear ratio 58:1	7820241
PPA motor-gearbox 24 Vdc, gear ratio 18:1	7830934
PPA motor-gearbox 24 Vdc, gear ratio 58:1	7830935
PPA motor-gearbox 36 Vdc, gear ratio 18:1	7821239
PPA motor-gearbox 36 Vdc, gear ratio 58:1	7821240
PPA motor-gearbox 90 Vdc, gear ratio 18:1	7820262
PPA motor-gearbox 90 Vdc, gear ratio 58:1	7820264
PPA motor-gearbox 115 Vac, gear ratio 18:1, anti coast brake	7825377
PPA motor-gearbox 115 Vac, gear ratio 58:1, anti coast brake	7825378
PPA motor-gearbox 115 Vac, gear ratio 18:1	7825379
PPA motor-gearbox 115 Vac, gear ratio 58:1	7825380
PPA motor-gearbox 115 Vac, gear ratio 18:1, electrical brake	7830123
PPA motor-gearbox 115 Vac, gear ratio 58:1, electrical brake	7829838
PPA motor-gearbox 230 Vac, gear ratio 18:1	7825811
PPA motor-gearbox 230 Vac, gear ratio 58:1	7825812
PPA motor-gearbox 230 Vac, gear ratio 18:1, electrical brake	7829371
PPA motor-gearbox 230 Vac, gear ratio 58:1, electrical brake	7829372

Synchronous operation can easily be obtained by using the Electrak PPA synchronous operation kit and one or several standard Electrak PPA-M actuators. The Electrak PPA synchronous operation kit consist of a manual gearbox, an adapter, a drive tube kit and motor gear-box with motor and gear ratio of customer choice. These components are ordered separately and assembled by the customer. The customer must also supply the shaft running in the drive tube kit (the drive tube can be cut to fit the application) between the adapter and the motor gear box and the shafts and couplings that are needed to connect the Electrak PPA synchronous operation kit and the Electrak PPA-M actuator(s).

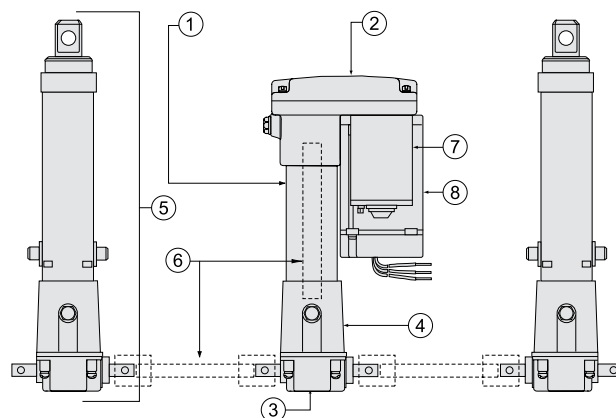

- |                          |                                     |
|--------------------------|-------------------------------------|
| 1: PPA drive tube kit    | 3: PPA manual gearbox               |
| • 1 × 26 inch drive tube | 4: PPA adapter                      |
| • 1 × screw              | 5: Standard Electrak PPA-M actuator |
| • 1 × lock washer        | 6: Customer supplied shafts         |
| • 2 × couplings          | 7: Size of DC motors                |
| 2: PPA motor-gearbox     | 8: Size of AC motors                |

# Accessories and Spare Parts

## Electrical Components

### Capacitor Kits


Designation	Figure	Compatible Actuators	Actuator Supply Voltage	Part Number
Capacitor kit	A	Electrak 5	115 Vac	9200-448-002
Capacitor kit	A	Electrak 5	230 Vac	9200-448-003
Capacitor kit *	B	Electrak PPA-AC	115 Vac	5704687
Capacitor kit *	C	Electrak PPA-AC	230 Vac	7825261

\* External capacitor only needed if the actuator has the anti-coast brake option, otherwise the capacitor is installed internally in the actuator.


All 230 and 115 Vac actuators require a capacitor to be wired between the windings to run. It is either mounted internally from factory (on Electrak PPA-AC actuators without brake option or with electrical brake option) or it needs to be mounted externally by the customer (on the rest of the 230 and 115 Vac actuators). Also see the Electrical Wiring Diagrams section.

A

Consult customer support for dimensions.

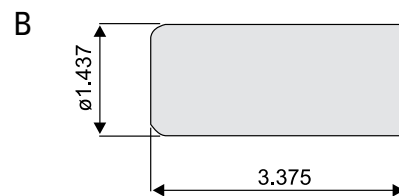

Note: screw terminal connection

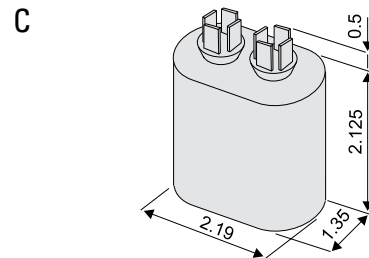

Note: cable clip connection

### Mating Connectors

Designation	Compatible Actuators	Part Number
Electrak 1 mating connector	Electrak 1, Electrak 1SP	9300-448-001
Electrak 050 mating connector	Electrak 050	9300-448-001
Electrak 2 mating connector	Electrak 2	9100-448-001
Electrak 10 mating connector	Electrak 10	9100-448-001
Electrak Pro mating connector	Electrak Pro	9200-101-042
Electrak Pro mating connector with 1 m pigtail	Electrak Pro	9200-101-043

Actuators with connectors are supplied with a mating connector. Extra mating connectors can be ordered by the part numbers listed above.

# Accessories and Spare Parts

## Spare Parts

Sealing Plugs		
Designation	Compatible Actuators	Part Number
Electrak 205 limit switch seal	Electrak 205	9200-680-002
Electrak Pro manual override seal	Electrak Pro	9200-680-001

A rubber plug covers the adjustment screws for the end of stroke limit switches on the Electrak 205 and for the manual override on the Electrak Pro. If this plug gets lost or broken it must be replaced to maintain the IP rating of the actuator.

# Accessories and Spare Parts

## Spare Parts

Electrak PPA Spare Parts	
Designation	Part Number
PPA motor-gearbox 12 Vdc, gear ratio 18:1	7820240
PPA motor-gearbox 12 Vdc, gear ratio 58:1	7820241
PPA motor-gearbox 24 Vdc, gear ratio 18:1	7830934
PPA motor-gearbox 24 Vdc, gear ratio 58:1	7830935
PPA motor-gearbox 36 Vdc, gear ratio 18:1	7821239
PPA motor-gearbox 36 Vdc, gear ratio 58:1	7821240
PPA motor-gearbox 90 Vdc, gear ratio 18:1	7830262
PPA motor-gearbox 90 Vdc, gear ratio 58:1	7830264
PPA motor-gearbox 115 Vac, gear ratio 18:1, anti coast brake	7825377
PPA motor-gearbox 115 Vac, gear ratio 58:1, anti coast brake	7825378
PPA motor-gearbox 115 Vac, gear ratio 18:1	7825379
PPA motor-gearbox 115 Vac, gear ratio 58:1	7825380
PPA motor-gearbox 115 Vac, gear ratio 18:1, electrical brake	7830123
PPA motor-gearbox 115 Vac, gear ratio 58:1, electrical brake	7829838
PPA motor-gearbox 230 Vac, gear ratio 18:1	7825811
PPA motor-gearbox 230 Vac, gear ratio 58:1	7825812
PPA motor-gearbox 230 Vac, gear ratio 18:1, electrical brake	7829371
PPA motor-gearbox 230 Vac, gear ratio 58:1, electrical brake	7829372
PPA actuator lift kit - 4 inch	7820146
PPA actuator lift kit - 6 inch	7827142
PPA actuator lift kit - 8 inch	7820950
PPA actuator lift kit - 12 inch	7820147
PPA actuator lift kit - 18 inch	7821066
PPA actuator lift kit - 24 inch	7821193
PPA actuator lift kit - 36 inch	7822047
PPA limit switch kit 12 Vdc, with housing	7823091
PPA limit switch kit 24 Vdc, 36 Vdc, 90 Vdc, 115 Vac, 230 Vac, with housing	7822519
PPA encoder kit with housing	7822048
PPA encoder kit without housing	7821764
PPA 10 kOhm potentiometer kit (only for ball screw driven units)	7821157
PPA 115 Vac capacitor kit	5704687
PPA 115 Vac capacitor kit - heavy duty	7825590
PPA 230 Vac capacitor kit	7825579



# Ordering Keys

## Electrak DC-actuators

Electrak 1		
1	2	3
S24 -	09A4 -	06
<b>1. Model and input voltage</b> S12 - = Electrak 1, 12 Vdc S24 - = Electrak 1, 24 Vdc	<b>2. Dynamic load capacity</b> 09A4 - = 25 lbf 17A8 - = 75 lbf	<b>3. Stroke</b> 02 = 2 inch 04 = 4 inch 06 = 6 inch

Electrak 1SP		
1	2	3
SP24 -	09A4 -	06
<b>1. Model and input voltage</b> SP12 - = Electrak 1SP, 12 Vdc SP24 - = Electrak 1SP, 24 Vdc	<b>2. Dynamic load capacity</b> 09A4 - = 25 lbf 17A8 - = 75 lbf	<b>3. Stroke</b> 02 = 2 inch 04 = 4 inch 06 = 6 inch

Electrak 050					
1	2	3	4	5	6
DE24 -	17W44 -	06	FN	HH	N
<b>1. Model and input voltage</b> DE12 - = Electrak 050, 12 Vdc DE24 - = Electrak 050, 24 Vdc DE36 - = Electrak 050, 36 Vdc DE24Q = Electrak 050, 24 Vdc, Q-version	<b>2. Dynamic load capacity</b> 17W41 - = 112 lbf 17W42 - = 60 lbf 17W44 - = 30 lbf	<b>3. Stroke</b> 02 = 2 inch 04 = 4 inch 06 = 6 inch 08 = 8 inch	<b>4. End of stroke limit switches and potentiometer</b> FN = limit switches and no potentiometer FP = limit switches and potentiometer <sup>1</sup>	<b>5. Rear and front mounting</b> HH = standard crosshole in both ends MH = crossholes rotated 90°	<b>6. Color</b> N = black housing W = white housing  <sup>1</sup> Not possible in combination with 8 inch stroke.

Electrak 2			
1	2	3	4
D12 -	20A5 -	12	D
<b>1. Input voltage</b> D12 - = 12 Vdc	<b>2. Dynamic load capacity and speed</b> 10A5 - = 250 lbf, high speed 20A5 - = 250 lbf, standard speed	<b>3. Stroke<sup>1</sup></b> 04 = 4 inch 08 = 8 inch 12 = 12 inch	<b>4. Shipment version<sup>2</sup></b> D = distributor version  <sup>1</sup> Contact customer service for other stroke lengths.  <sup>2</sup> Contact customer support for OEM version.


# Ordering Keys

## Electrak DC-actuators

Electrak PPA-DC					
1	2	3	4	5	6
PPA24 -	58B65 -	18	N -	LS	X
<b>1. Model and input voltage</b> PPA12 - = Electrak PPA-DC, 12 Vdc PPA24 - = Electrak PPA-DC, 24 Vdc PPA36 - = Electrak PPA-DC, 36 Vdc PPA90 - = Electrak PPA-DC, 90 Vdc  <b>2. Dynamic load capacity</b> 18B65 - = 750 lbf 58B65 - = 1500 lbf		<b>3. Stroke</b> 04 = 4 inch 08 = 8 inch 12 = 12 inch 18 = 18 inch 24 = 24 inch 36 = 36 inch  <b>4. Brake option</b> N - = no brake option		<b>5. Feedback option</b> XX = no feedback option LS = end of stroke limit switches PO = potentiometer <sup>1</sup> HS = encoder HL = encoder + end of stroke limit switches  <b>6. Bellows option</b> X = no bellows C = bellows  <sup>1</sup> Not available with limit switches.	

Electrak 10		
1	2	3
D12 -	20B5 -	04
<b>1. Input voltage</b> D12 - = 12 Vdc D24 - = 24 Vdc D36 - = 36 Vdc	<b>2. Dynamic load capacity and speed</b> 05B5 - = 500 lbf 10B5 - = 1000 lbf, high speed 20B5 - = 1000 lbf, standard speed	<b>3. Stroke</b> 04 = 4 inch 08 = 8 inch 12 = 12 inch

Electrak Pro						
1	2	3	4	5	6	7
PR24	10-4B65	-	04	R	S	S
<b>1. Model and input voltage</b> PR12 = Electrak Pro, 12 Vdc PR24 = Electrak Pro, 24 Vdc  <b>2. Dynamic load capacity and screw type</b> 02-2A65 = 250 lbf, acme 05-4A65 = 500 lbf, acme 07-8A65 = 750 lbf, acme 05-2B65 = 500 lbf, ball 10-4B65 = 1000 lbf, ball  <b>3. Protection class</b> - = IP66 (standard) E = IP67		<b>4. Stroke (S)<sup>1</sup></b> 02 = 2 inch 04 = 4 inch 06 = 6 inch 08 = 8 inch 12 = 12 inch  <b>5. Control PCB options</b> S = electronic load monitoring, ELM (standard) D = ELM + encoder L = ELM + linear potentiometer <sup>2</sup> P = ELM + programmable end of stroke <sup>2</sup> T = ELM + low level current switching R = ELM + end of stroke indication outputs <sup>2</sup> U = ELM + ELM trip indication output K = ELM + signal follower input <sup>2</sup>		<b>6. Front adapter and anti-rotation options</b> C = freely rotatable cross hole, no anti-rotation S = cross hole in standard position, anti-rotation <sup>3</sup> M = cross hole rotated 90°, anti-rotation <sup>3</sup> R = rod end, anti-rotation, shipped loose with locknut  <b>7. Finish</b> S = silver powder coat on housing (std) B = actuator painted black  <sup>1</sup> Contact customer service for different retracted lengths. <sup>2</sup> Ball screw units require anti-rotation, optional for acme screw units (specify S, M, C or R in pos. 6). <sup>3</sup> Definition of cross hole positions.		



# Ordering Keys

## Electrak AC-actuators

Electrak PPA-AC					
1	2	3	4	5	6
PPA22 -	18B65 -	18	SB	XX	C
<b>1. Model and input voltage</b> PPA11 - = Electrak PPA-AC, 1 × 115 Vac PPA22 - = Electrak PPA-AC, 1 × 230 Vac  <b>2. Dynamic load capacity</b> 18B65 - = 500 lbf 58B65 - = 1500 lbf		<b>3. Stroke</b> 04 = 4 inch 08 = 8 inch 12 = 12 inch 18 = 18 inch 24 = 24 inch 36 = 36 inch  <b>4. Brake option<sup>1</sup></b> N - = no brake option SB = anti coast brake EB = electrical brake <sup>2</sup>		<b>5. Feedback option</b> XX = no feedback option LS = end of stroke limit switches PO = potentiometer <sup>3</sup> HS = encoder HL = encoder + end of stroke limit switches  <b>6. Bellows option</b> X = no bellows C = bellows <sup>4</sup>  <sup>1</sup> See "Brake" in the Glossary section on page 74 for more information. <sup>2</sup> Only possible for 1 × 115 Vac models. <sup>3</sup> Not available with limit switches. <sup>4</sup> Only possible on 12 inch stroke or longer.	

Electrak 5			
1	2	3	4
A12 -	05B5 -	04	D
<b>1. Model and input voltage</b> A12 - = Electrak 5, 1 × 115 Vac A22 - = Electrak 5, 1 × 230 Vac	<b>2. Dynamic load capacity</b> 05B5 - = 500 lbf 10B5 - = 1000 lbf	<b>3. Stroke</b> 04 = 4 inch 08 = 8 inch 12 = 12 inch 18 = 18 inch 24 = 24 inch	<b>4. Shipment version<sup>1</sup></b> D = distributor version  <sup>1</sup> Leave position blank for OEM version.

Electrak 205			
1	2	3	4
ALP22 -	10B5 -	04	
<b>1. Model and input voltage</b> ALP12 - = Electrak 205, 1 × 115 Vac ALP22 - = Electrak 205, 1 × 230 Vac	<b>2. Dynamic load capacity</b> 05B5 - = 500 lbf 10B5 - = 1000 lbf	<b>3. Stroke</b> 04 = 4 inch 08 = 8 inch 12 = 12 inch 18 = 18 inch 24 = 24 inch	<b>4. Shipment version<sup>1</sup></b> D = distributor version  <sup>1</sup> Leave position blank for OEM version.

# Ordering Keys

## Non-driven and Rotary Actuators

Electrak PPA-M			
1	2	3	4
PPA00 -	01B65 -	24	N-XXX
<b>1. Model</b> PPA00 - = Electrak PPA-M	<b>2. Dynamic load capacity</b> 01B65 - = 1500 lbf	<b>3. Stroke</b> 04 = 4 inch 06 = 6 inch 08 = 8 inch 12 = 12 inch 18 = 18 inch 24 = 24 inch 36 = 36 inch	<b>4. Bellows option</b> N-XXX = no bellows N-XXC = bellows

DGB		
1	2	3
D36 -	21GB -	XXCL
<b>1. Input voltage</b> D12 - = 12 Vdc D24 - = 24 Vdc D36 - = 36 Vdc	<b>2. Load torque capacity and no load speed</b> 21GB - = 100 lbf-in, 200 rpm 30GB - = 100 lbf-in, 140 rpm <sup>1</sup>	<b>3. Version</b> XXCL = one output shaft + clevis mount XXMO = one output shaft + manual override XXDS = dual output shafts  <sup>1</sup> Not possible with 36 Vdc input voltage.

# Glossary

## A – Du

### Acme Screw

Acme screws withstand vibration and shock better than ball or worm screws and are used for applications with these characteristics. Also see “lead screw”.

### Actuator Housing

The actuator housing provides environmental protection for the internal components and may also be a structural member of the actuator.

### Adapters

The front and rear adapters are the connection points for mounting most Thomson actuators. The front adapter is usually a cross hole but optionally may be a tapped hole, threaded rod, or universal rod end. The rear adapter may be cast into the actuator housing or held in place with a nut.

### Adjustable End of Stroke Limit Switches

The adjustable end of stroke limit switches may be moved to positions inside the full stroke of the actuator and will shut off the actuator when it reaches the limit switch. Also see “end of stroke limit switches”.

### Anti Coast Brake/Electrical Brake

Depending on the load, AC ball screw actuators may coast to a stop when power is removed. This overrun is eliminated by an anti coast brake or an electrical brake. The anti coast brake (pawl type) will allow up to one revolution of the motor after power is removed. They are used on the Electrak 5 and PPA-AC with anti coast brake. An electrical brake (electrically released) operates much faster after power is removed and allow less coast than the pawl type. Electrak 205 and the PPA-AC with electrical brake use this type of brake. Also see “brake”.

### Anti Rotation Mechanism

A feature available on some actuators that resolves the restraining torque within the actuator. The extension tube will not rotate on actuators with this feature.

### Ball Screw

Ball screws are highly efficient and are used for high loads and speeds. Also see “lead screw”.

### Brake

Actuators using a acme or worm screw are inherently self-locking while ball screw driven actuators are not. To prevent ball screw actuators from backdriving they incorporate an anti backdriving brake (holding brake). Ball screw actuators with an AC motor can also be equipped with an anti coast brake. Also see “anti coast brake/electrical brake” and “holding brake”.

### Capacitor

The ac actuators use permanent split capacitor motors and require the use of a start/run capacitor in the control circuit to operate. The controls for the ac actuators have the capacitor included in the control. For customer supplied controls, a separate capacitor is required and the part number is included on the actuator product page.

### Certificates

CE certification and UL listing are the two main third party approvals available for actuators. Most of the AC actuators are UL listed as standard and UL has no standard for DC actuators under 48 Vdc. All actuators sold in the EU are CE certified while some actuators sold outside of the EU may not be. If you order your actuator outside of the EU and need a CE certification, contact the factory to verify availability and be sure to include the request on your order.

### Controls

Controls can be external to the actuator and provide the actuator with the correct voltage, have either membrane or pendant operators and some have position indicators. The Pro series also has internal controls that continuously monitor the operation of the actuator.

### Cover Tube

The cover tube provides protection for the lead screw and provides protection and support for the extension tube. For the Electrak 100 and PPA and as an option on the Electrak 205 actuators, the cover tube also provides the rear mounting connection.

### Customization

Even the most versatile actuator may not always suit all applications. But whatever your need is, our engineers are ready to help you to customize the actuators according to your requirements. We build more exclusive actuators than anyone else and have decades of experience of producing actuators to meet special needs.

### Duty Cycle

$$\text{Duty cycle} = \frac{\text{on time}}{(\text{on time} + \text{off time})}$$

Example: 15 sec on, 45 sec off

$$\frac{15 \text{ sec}}{(15 \text{ sec} + 45 \text{ sec})} = 25\% \text{ duty cycle}$$

The duty cycle is a function of load for dc actuators. The duty cycle charts for each actuator should be reviewed when lower loads and higher duty cycles are needed. All actuators have at least a 25% duty cycle at full rated load. Ambient temperatures above 77° F may affect the final rating.

# Glossary

## Dy – Lo

### Dynamic Load

The dynamic load rating is how much load the actuator will move when power is applied. Also see “load rating”.

### Dynamic Braking

Dynamic braking is a feature on the Pro series which short circuits the motor windings at power off resulting in a shorter coasting distance before the actuator comes to a complete stop. Dynamic braking can be accomplished on other dc actuators by wiring the control to short the motor leads when power is removed.

### Electronic Limit Switches (ELS)

ELS stands for Electronic Limit Switches and it is a current sensing function used in some actuator control models. The ELS senses the current and if the current exceeds a pre-set level the control cuts the power to the motor. This function can be used to detect and stop at the ends of the actuator stroke or to stop the actuator if it runs into an obstacle.

### Electronic Load Monitoring (ELM)

A built-in microprocessor inside the Pro series actuators continuously monitors the performance of the actuator. The microprocessor will stop the movement at the end of stroke, in case of mid stroke stall, at overload conditions or if the duty cycle is too high. It also eliminates the need of a clutch and provides dynamic braking.

### Encoder Feedback

Encoders provide a digital output signal that can be used to determine the position of the extension tube. An encoder equipped actuator must return to a “home” position if power is removed and restored in order to reset its starting point. Also see “potentiometer feedback”.

### End of Stroke Limit Switches

End of stroke limit switches are switches that are incorporated in some actuator models, either as standard or as an option, that will shut off power when the end of stroke is achieved. Also see “fixed end of stroke limit switches” and “adjustable end of stroke limit switches”.

### End Play (Backlash)

The stack up of tolerances within the lead screw assembly and gearing allowing some linear movement of the extension tube without rotating the motor. Typical end play or backlash varies by model. The range is 0.015 to 0.080 inch.

### Extension Tube

The extension tube slides in and out of the actuator and is connected via the front adaptor to the load being moved or positioned.

### Fixed End of Stroke Limit Switches

The fixed end of stroke limit switches allow the full stroke of the actuator to be used and will shut off power when the end of stroke is achieved. Also see “end of stroke limit switches”.

### Holding Brake

The Electrak 1, 2, 050, 150 and some Pro series incorporate an acme screw which is inherently self-locking while Electrak 5, 10, 100, 205 and the high load Pro series actuators have a ball screw drive incorporating an anti backdriving brake (holding brake) that engages when the actuator has come to a complete stop. Also see “brake”.

### Input Voltage

The nominal voltage required to operate the actuator. All actuators will accept at least a  $\pm 10\%$  variation of the nominal voltage but a change in the voltage will result in a change of the speed of dc actuators. Controls are available that accept 115 or 230 Vac input and provide 24 Vdc output to operate 24 Vdc actuators.

### Installation Instructions

Each actuator has an installation manual to answer typical questions about mounting and wiring the actuators.

### Lead Screw

Actuators use three different types of lead screws depending on the configuration and load requirements of the actuator. Ball screws are highly efficient and are used for high loads and speeds. Acme screws withstand vibration and shock better and are used for applications with these characteristics. Worm screws are self locking and will not backdrive.

### Lifetime Expectancy

Life is a function of load, stroke length and how often the overload clutch is operated. The specific load/life charts for each actuator will provide a life estimate for your particular application.

### Lifting Columns

Lifting columns provide a stable base for adjusting the height of tables or platforms. The column provides both the lifting force and the ability to resolve high moment forces from off axis loads.

### Linear Actuators

Actuators providing a linear thrust via an extension tube to lift, lower, push, pull or position a load.

### Load Rating

The load rating is the minimum amount of force the actuator will provide during its lifetime. The load rating of all rod style actuators is the same for both compression and tension loads. Also see “dynamic load”, “static load” and “tension and compression load”.

# Glossary

## M – P

### Manual Override (Hand Wind)

Allows manual operation of the actuator in both directions in case of a power failure. The actuator accepts a standard hexagon key to rotate the motor in either direction. Optional on some models and standard on the Pro series.

### Maximum On Time

The maximum amount of time an actuator may operate without stopping to “cool off”. For high load and long stroke actuators this may be one extend and retract cycle. The actuator should not exceed 25% duty cycle at full rated load.

### Mounting

Electrak actuators are quickly and easily mounted by slipping pins through the holes on each end of the unit and into brackets on the machine frame and the load. Electrak 100 units must be mounted by the cover tube and a swivel rod end. PPA actuators are mounted by the rear trunnions on the cover tube and the clevis on the extension tube. The Electrak 205 can be mounted by either the rear clevis or by a tube mount. Half inch diameter solid pins (1/4 inch solid pins for Electrak 1 and 050) provide maximum holding strength and a retaining or cotter pin on each end will prevent the solid pin from falling out of its mounting bracket. Roll or spring type mounting pins should be avoided. The mounting pins must be parallel to each other as shown below (Fig. a). Pins which are not parallel may cause the actuator to bind. The load should act along the axis of the actuator since off center loads may cause binding (Fig. b).

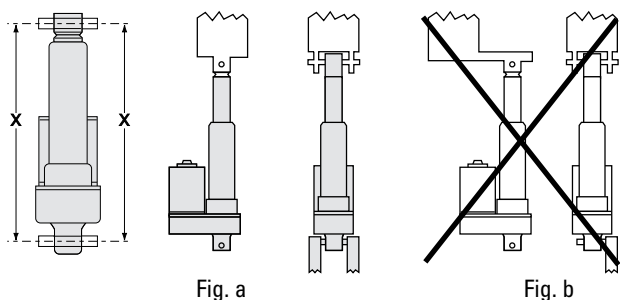


Fig. a

Fig. b

### Non-driven Actuators

Actuators supplied without a motor and driven manually or by a customer supplied motor.

### Operating and Storage Temperature

The operating temperature is the range in which the actuator may be safely operated. For the high end of the range, the duty cycle will be lower than 25 %. All actuators can be stored or transported at the same temperature as the operating temperature. Contact customer support if the operating temperature will be exceeded during storage or transportation.

### Output Voltage

Output voltage is the voltage from the control to run the actuator. The controls for dc actuators have 24 Vdc output. The controls for ac actuators have either 115 or 230 Vac output.

### Overload Clutch

Electrak 050, 2, 5, 10, 100, 205 and PPA series linear actuators are protected by a load limiting mechanical clutch which prevents the motor from stalling at either end of the actuator stroke. It will also slip when the factory-set load limit is exceeded. The clutch is a ball detent design, assuring a consistent slip point and long life.

### Potentiometer Feedback

Potentiometers provide an analog output signal that can be used to determine the position of the extension tube. A potentiometer will “remember” its position if power is removed and restored. All potentiometers are set to a minimum value on full retract. Also see “encoder feedback.”

### Programmable Limit Switches

An optional control contained inside the Pro series to which an external programming box or customer supplied switches can be connected to set and reset the end of stroke limits as often as needed. The programming box has a “jog to position” switch and a “set limit” switch.

### Protection Class

The protection class refers to the environmental rating of the enclosure. The first digit applies to airborne contaminants and the second digit to water/moisture.

IP33: protected against the penetration of solid objects with a diameter greater than 12 mm and against direct sprays of water up to 60 degrees from vertical.

IP44: protected against the penetration of solid objects with a diameter greater than 1 mm and against water sprayed from any direction.

IP45: protected against the penetration of solid objects with a diameter greater than 1 mm and low pressure water jets from any direction.

IP51: protected from dust and vertical dripping water/condensation.

IP52: protected from dust and dripping water/condensation falling at an angle up to 15 degrees from vertical.

IP56: protected from dust and high pressure water jets from any direction.

IP65: dust tight and protected against low pressure water jets from any direction.

IP66: dust tight and protected against high pressure water jets from any direction.

IP67: dust tight and protected against the effect of immersion in water between 150 mm (5.9 inch) and 1 meter (39.4 inch).

# Glossary

## R – W

### Restraining Torque

The torque which is developed between the clevis on the extension tube and rear mount (clevis or trunnion) when the unit extends or retracts and ratchets the clutch (Fig. c).




Fig. c

### Rodless Actuators

Rodless actuators provide support for the load as well as thrust. The load is supported and moved by a carriage on the actuator rather than pushed or pulled by an extension rod. Rodless actuators are ideal for applications requiring long strokes (up to 5 feet), high speeds (up to 4.3 in/sec), movement of the load within the shortest envelope possible or the load supported by the actuator.

### Rotary Actuators

Actuators providing a rotary output to position a load, turn a winch, or rotate a gear or sprocket.

### Service and Maintenance

Actuators are generally maintenance free. The Electrak 2, 5, 10, 100, 205 and Pro series have repair kits available from your local distributor or OEM.

### Signal Follower Input / Control

An optional control contained inside the Pro series actuators that will cause the extension tube position to follow a customer supplied potentiometer signal. Also known as a position follower control.

### Sizing and Selection

The Danahermotion.com web site includes a product advisor that can be used to walk through the decision process for picking the best actuator and to get the ordering data for your choice. Go to [www.danahermotion.com/linear\\_actuator\\_advisor](http://www.danahermotion.com/linear_actuator_advisor) to find out more.

### Speed

DC actuators have a direct load/speed relationship. As the load increases, the speed of the dc actuators decreases. There are curves on each product page to show the speed from no load to full rated load. AC actuators have very little speed fluctuations based on load but there are load/speed curves on all the ac actuator product pages.

### Spline Safety Function

An optional safety function on the rodless actuator (LM80) that will stop downward motion in case the carriage (the moving member) collides with an obstacle. The motor will keep running but the carriage will stand still and not pull down on the obstacle. When reversing the motor rotation the carriage will automatically start to move upwards again.

### Static Load

The static load rating is how much load the actuator will hold with power off. The static load rating is normally twice the dynamic load rating. Also see "load rating".

### Synchronous Operation

Motor speed cannot be controlled with enough precision to ensure that the actuators will remain synchronized and a binding effect could take place. Non-driven actuators may be mechanically linked and thereby synchronized.

### Tension and Compression Load

A tension load tries to stretch the actuator and a compression load tries to compress the actuator (Fig. d). Most actuators can manage the same tension and compression load. Also see "load rating".




Fig. d

### Vent Tube

The Electrak 050 and 150 have a breather tube in the wiring harness to allow the actuator to operate without creating a vacuum and drawing water through the seals on the cover tube.

### Worm Screw

Worm screws are self locking and will not backdrive. Also see "lead screw".



# Application Data Form

## Worksheet

Application Data Form*		
Submitted by:	Phone:	Date:
1. Company name	20. Do you need any special retracted length (cross hole c/c in inches)?	
2. Street address	21. Is anti-rotation of the extension tube required (yes/no)?	
3. City-state, zip	22. What is the input voltage?	
4. Contact name	23. Do you need any of the optional features of the actuator?	
5. Phone	24. How will the actuator be connected (standard or special cabling)?	
6. Fax	25. Is mating connector required if connector is included in the actuator?	
7. E-mail	26. Do you need any special paint or finish?	
8. What is the estimated annual volume?	27. Is manual override necessary?	
9. What is the target price?	28. What are the environmental conditions (dusty, outdoors, wash down)?	
10. What is the current or alternative solution?	29. What is the operation temperature range in Farenheit?	
11. How much load is moved in pounds?	30. What is the duty cycle (on-time / on-time + off-time) in sec?	
12. How much load do you need to hold in pounds?	31. Do you need any certificate(UL, CE, etc.)?	
13. How will the actuator be mounted (horizontal/vertical)?	32. Do you require any print (dwg, dxf, faxed)?	
14. Is the load trying to stretch or/and compress the actuator?	33. Describe any additional requirements (packaging, labeling. etc.)	
15. What speed do you want the actuator to move in in/sec?		
16. What is the life of the unit in cycles (one cycle = extend and retract)?		
17. What is the stroke length?		
18. How will the actuator be mounted to the extension tube?		
19. How will the actuator be mounted to the rear adaptor?		

\* Please enter all fields in the form and send it and any drawing to customer service by mail or fax. See the back of the catalog for the nearest location.

# Application Data Form

Drawing/notes

A large grid area for drawing or notes, consisting of 20 columns and 30 rows of small squares.

# Application Data Form

Drawing/notes

A large grid area for drawing or notes, consisting of 20 columns and 30 rows of small squares.

## USA, CANADA and MEXICO

### Thomson

203A West Rock Road  
Radford, VA 24141 USA  
Phone: 1-540-633-3549  
Fax: 1-540-633-0294  
E-mail: thomson@thomsonlinear.com  
Literature: literature.thomsonlinear.com

## EUROPE

### United Kingdom

Thomson  
Fishleigh Road  
Barnstaple  
EX31 3UD  
United Kingdom  
Phone: +44 (0)1271 334 500  
Fax: +44 (0)1271 334 501  
E-mail: sales.uk@thomsonlinear.com

### Germany

Thomson  
Nürtinger Straße 70  
72649 Wolfschlügen  
Phone: +49 (0) 7022 504 100  
Fax: +49 (0) 7022 504 405  
E-Mail: sales.wolfschlügen@thomsonlinear.com

### Italy

Thomson  
Largo Brughetti  
I-20030 Bovisio Masciago  
Italy  
Phone: +39 0362 594260  
Fax: +39 0362 594263  
E-mail: info@thomsonlinear.it

### Sweden

Thomson  
Box 9053  
SE-291 09 Kristianstad  
Sweden  
Phone: +46 (0) 44-24 67 00  
Fax: +46 (0) 44-24 40 85  
E-mail: sales.scandinavia@thomsonlinear.com

### France

Thomson  
C.P 80018  
12, Rue Antoine Becquerel – Z.I. Sud  
F-72026 Le Mans Cedex 2  
France  
Phone: +33 (0) 243 50 03 30  
Fax: +33 (0) 243 50 03 39  
E-mail: sales.france@thomsonlinear.com

### Spain

Thomson  
Rbla Badal, 29-31 7th, 1st  
08014 Barcelona  
Spain  
Phone: +34 (0) 9329 80278  
Fax: +34 (0) 9329 80278  
Email: josep.estaran@thomsonlinear.com

## ASIA

### China

Thomson  
Rm 2206, Scitech Tower No22  
Jianguomenwai Avenue  
Beijing, China, 100004  
Phone: +86 400 666 1802  
Fax: +86 10 6515 0506  
E-mail: tm.sales@danaher.com

### Japan

Thomson  
2F, Sigma Hatchobori Bldg,  
2-7-1 Hatchobori Chuo-ku,  
Tokyo 104-0032 Japan  
Phone: +81-3-6222-1051  
Fax: +81-3-6222-1055  
E-mail: info@danahermotion.co.jp

### Asia Pacific

Thomson  
Unit A, 16 Floor, 169 Electric Road  
Manulife Tower, North Point  
Hong Kong  
Phone: +852 2503 6581  
Fax: +852 2571 8585  
E-mail: victor.lim@thomsonlinear.com

### Korea

Thomson  
Room No. 715, Western Tower II  
867, Janghang-dong,  
Lisandong-gu, Koyang-city  
Kyunggi-do, 410-380, Korea  
Phone: +82 31 931 5170  
Fax: +82 31 931 5176  
E-mail: koreainfo@thomsonlinear.com

### India

Thomson  
Unit No 2, SDF 1  
Seepz  
Andheri, Mumbai 400 096, India  
Phone: +91 22 28294058  
Fax: +91 22 28394036  
E-mail: girish.mahajani@danahermotion.com