

Unitronics 2011



PLC + HMI in One Unit



Unitronics Distributors Worldwide

PLC + HMI
in One Unit

Argentina: AEA SACIF
Australia: Micromax Pty. Ltd.
Austria: Schmachtl GmbH
Belgium: Isotron Systems BVBA
Brazil: DAKOL Instrumentos e Sistemas Ltda.
Bulgaria: Semo Ltd.
Canada: Sandtron Automation Limited
Chile: E.i.Schadler y Cia Ltda.
China: Konder Co, Ltd. & Automate Control Engineering Ltd.
Colombia: COLSEIN LTDA
Croatia: Tipteh d.o.o. (Slovenia)
Cyprus: Anaxagoras Pneumatics Ltd.
Czech Republic: Schmachtl CZ, spol. s r.o.
Denmark: Desim Elektronik ApS
Estonia: Klinkmann Eesti AS
Finland: Klinkmann Automation Oy
France: PL SYSTEMS
Germany: Spectra Computersysteme GmbH
Greece: Automation & Power Control Ltd
Hong Kong: Automate Control Engineering Ltd.
Honduras: Electrical Dealer
Hungary: Kvalix Automatika Kft.
India: Rajdeep Automation Pvt Ltd
Ireland: Automated Components Ireland Ltd (ACI)
Israel: Zivan Instruments Co. Ltd.
Italy: TELESTAR s.r.l.
Latvia: Klinkmann Lat Ltd.
Lithuania: Klinkmann Lit



Macedonia: Tipteh d.o.o Skopje
Malaysia: Yewtech SDN BHD
Mexico: Sistemas de Control Autec, S.A. de C.V.
New Zealand: EMC Industrial Group Ltd.
Norway: Tormatic as
Peru: EPLI SAC
Philippines: Cosine Industries INC
Poland: Elmark Automatyka Sp. zo.o.
Portugal: Tecnilab Portugal, SA
Russia: Klinkmann Spb & ZAO Klinkmann Spb
Serbia: ACE-Automatic Control Engineering
Singapore: SciGate Automation (s) Pte Ltd
Slovakia: S.D.A. s.r.o
Slovenia: Tipteh d.o.o.
South Africa: Vision Automation
Spain: SIDE, SA
Sweden: Leuze SensorGruppen AB
Switzerland: COMAT AG Industrielle Elektronik
Taiwan: MARK Automation Technologies Inc.
Thailand: Themtech Company Ltd.
The Netherlands: Isotron Systems BV
Turkey: Yorum Otomatik Kontrol
Ukraine: Klinkmann Ukraine LLC
United Kingdom: Multiple Local Suppliers
USA: Unitronics Inc.
Venezuela: Intrave, CA
Vietnam (North): Q Systems Ltd.
Vietnam (South): Hung Giang

Unitronics designs, manufactures,
and markets quality PLCs for the
global market.

Easy to use, efficient, and affordable, our products have been automating processes, systems, and stand-alone applications since 1989.

We maintain more than 140 distributors in over 50 countries around the globe, enabling our customers to purchase our products with local marketing support.

Unitronics' field-proven PLCs automate tens of thousands of installations in diverse fields: petrochemical, automotive, food processing, plastic & textile, energy & environment, water & waste water management—anywhere automated processes are required.

Our clients include: Coca-Cola, General Motors, Michelin, Tupperware, Intel, Bayer, Colgate-Palmolive, Bosch-Rexroth, ABB, Land Instruments, Mercedes, Agfa, Tyson Foods, Pirelli, Fiat, Samsonite.

PLC + HMI = OPLC™

The advantages of
Complete Control:

- Reduced programming—a single programming environment for both PLC and HMI applications
- Less wiring, less space required
- Saves I/O points and reduces hardware
- Panel-PLC communication is built-in



Vision1210™/1040™ Color OPLC™

Color Vision1210™/1040™ Series Featuring:

HMI

- Up to 1024 user-designed screens
- 500 images per application
- HMI graphs—color-code Trends
- Built-in alarm screens
- Text String Library—easy localization
- Troubleshoot via the HMI panel—no PC needed

PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card—log, backup, clone, & more
- Time-based control in 3 clicks

Communication

- Ethernet via TCP/IP
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- SMS messaging & Send e-mail function
- GPRS/GSM/CDMA enabled
- Remote Access utilities
- MODBUS protocol support
- CANbus: CANopen, UniCAN, SAE J1939 & more
- Ports: supplied with 2 isolated RS232/RS485 & 1 CANbus; 1 USB programming port; 1 port may be added for serial/Ethernet
- DF1 Slave



V1210™



V1040™

... An advanced PLC with an integrated color Touchscreen, plus Snap-in and Expansion I/Os ...



Get the big picture - Vision1210™/1040™ PLC & 12.1"/10.4" touchscreen HMI

New!

New!

Article Number	V1040-T20B	V1210-T20BJ*
I/O Options		
Snap-in I/O Modules	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog and Temperature Measurement. Outputs may include Transistor, Relay or Analog (sold separately).	
I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus	
Program		
Application Memory	Application Logic: 2MB • Images: 32MB • Fonts: 1MB	
Scan Time	9µsec per 1K of typical application	
Memory Operands	8192 coils, 4096 registers, 512 long integers (32 bit), 256 double words (32 bit unsigned), 64 floats, 384 timers (32 bit), 32 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words	
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K Flash data	
SD Card (Micro)	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs	
USB	1 USB programming port (Mini-B)	
Enhanced Features	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language	
Operator Panel		
Type	TFT LCD	
Display Backlight Illumination	white LED	
Colors	65,536 colors, 16-bit resolution • Brightness- Adjustable via touchscreen or software	
Display Resolution & Size	800 x 600 pixels (SVGA), 10.4"	800 x 600 pixels (SVGA), 12.1"
Touchscreen	Resistive, Analog	
Keyboard		
Number of keys	9 programmable function keys	Virtual keypad
General		
Power Supply	12/24VDC	
Battery	7 years typical at 77°F, battery back-up for all memory sections and RTC	
Environment	IP65/NEMA4X (when panel mounted)	NEMA4X/IP66/IP65 (when panel mounted)
Clock	Real-time clock functions (date and time)	

Not yet UL certified

Vision570™/560™ Color OPLC™

Color Vision570™/560™ Series Featuring:

HMI

- Up to 1024 user-designed screens
- 500 images per application
- HMI graphs—color-code Trends
- Built-in alarm screens
- Text String Library—easy localization
- Virtual alpha-numeric keypad
- Troubleshoot via the HMI panel—no PC needed

PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- SD card—log, backup, clone, & more
- Time-based control in 3 clicks

Communication

- Ethernet via TCP/IP
- Web server: Use built-in HTML pages, or design complex pages to view & edit PLC data via the Internet
- Send e-mail function
- SMS messaging
- GPRS/GSM/CDMA enabled
- Remote Access utilities
- MODBUS protocol support
- CANbus: CANopen, UniCAN, SAE J1939 & more
- DF1 Slave
- Ports: supplied with 2 isolated RS232/RS485 & 1 CANbus; 1 port may be added for serial/Ethernet



V560™



V570™

... Our Color PLCs
bring your system to life ...

CE/UL

An advanced PLC with an integrated color Touchscreen,
plus Snap-in and Expansion I/Os (up to 1000)



Article Number	V570-57-T20B	V570-57-T40B	V560-T25B*	V570-57-T20B-J*
I/O Options				
Snap-in I/O Modules	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog and Temperature Measurement. Outputs may include Transistor, Relay or Analog (sold separately).			
I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus			
Program				
Application Memory	Application Logic: 2MB • Images: 12MB • Fonts: 1MB			
Scan Time	9µsec per 1K of typical application			
Memory Operands	8192 coils, 4096 registers, 512 long integers (32 bit), 256 double words (32 bit unsigned), 64 floats, 384 timers (32 bit), 32 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words			
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K Flash data			
SD Card	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, done PLCs			
Enhanced Features	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language			
Operator Panel				
Type	TFT LCD			
Display Backlight Illumination	white LED	Fluorescent lamp	white LED	
Colors	65,536 colors, 16-bit resolution • Brightness- Adjustable via touchscreen or software			
Display Resolution & Size	320 x 240 pixels (QVGA), 5.7"			
Touchscreen	Resistive, Analog			
Keyboard				
Number of keys	Virtual keyboard		24 programmable keys. Labeling options - function keys or customized	
General				
Power Supply	12/24VDC	24VDC	12/24VDC	
Battery	7 years typical at 77°F, battery back-up for all memory sections and RTC			
Environment	NEMA4X/IP65 (when panel mounted)			NEMA4X/IP66/IP65 (when panel mounted)
Clock	Real-time clock functions (date and time)			

Not yet UL certified

Vision350™ Color OPLC™

... The world's smallest PLC with an integrated
Color Touchscreen ...



Color Vision350™ Series Featuring:

HMI

- 1024 user-designed screens and 250 images per application
- HMI graphs—color-code Trends
- Built-in alarm screens
- Text String Library—easy localization
- Troubleshoot via the HMI panel—no PC needed

PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card—log, backup, done, & more
- Time-based control in 3 clicks

Communication

- GPRS/GSM/CDMA enabled
- Ethernet via TCP/IP
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- SMS messaging, Send e-mail function
- Remote Access utilities
- MODBUS protocol support
- CANbus: CANopen, UniCAN, SAE J1939 & more
- DF1 Slave
- Ports: supplied with 1 RS232/RS485; 2 ports may be added: 1 Serial/Ethernet/Profibus and 1 CANbus



¹ In these models certain inputs are adaptable, and can function as either digital, analog, and in certain models also as thermocouple or PT100. Using adaptable inputs reduces the amount of free digital inputs. For example, V350-35-RA22 offers 12 digital inputs. Implementing 2 TC inputs requires 4 digital inputs, leaving 8 free.

² Certain inputs can function as high-speed counters, shaft-encoder inputs, or normal digital inputs.

³ This specification depends on cable length.

⁴ This specification depends upon driver type.

* V350-35-TR20 & V350-35-TR6 are not yet UL certified.

Color it beautiful!

Power PLC, Color Touchscreen & onboard, expandable I/Os (up to 512)

		New!				New!					
Article Number	V350-35-B1	V350-35-TR20*	V350-35-R34	V350-35-TR34	V350-35-TR6*	V350-35-RA22	V350-35-TRA22	V350-35-T2	V350-35-T38	V350-35-TA24	
	No onboard I/Os	10 Digital 2 D/A Inputs ¹ 6 Relay Outputs 2 High-speed Transistor Outputs	20 Digital 2 D/A Inputs ¹ 12 Relay Outputs	20 Digital 2 D/A Inputs ¹ 8 Relay 4 High-speed Transistor Outputs	6 Digital 2 D/A, 4 Analog Inputs ¹ 6 Relay 2 High-speed Transistor Outputs	8 Digital 2 D/A, 2 PT100/TC/ Digital ¹ Inputs 8 Relay 2 Analog Outputs	8 Digital, 2 D/A 2 PT100/TC/ Digital ¹ Inputs 4 Relay, 2 Analog 4 High-speed Transistor Outputs	10 Digital 2 D/A Inputs ¹ 12 Transistor Outputs	20 Digital 2 D/A Inputs ¹ 16 Transistor Outputs	8 Digital 2 D/A, 2 PT100/ TC/Digital ¹ Inputs 10 Transistor 2 Analog Outputs	
Inputs											
Digital	None	12	22	22	8	12	12	12	22	12	
HSC/Shaft-Encoder/ Max Freq. Measurer ^{2&3}		3 200kHz ⁴ 32-bit	3 30kHz 32-bit	3 200kHz ⁴ 32-bit	1 200kHz ⁴ 32-bit	1 30kHz 32-bit	1 200kHz ⁴ 32-bit	3 30kHz 32-bit	2 30kHz 32-bit	1 30kHz 32-bit	
Analog		2 10-bit, 0-10V 0-20mA 4-20mA	2 10-bit, 0-10V 0-20mA 4-20mA	2 10-bit, 0-10V 0-20mA 4-20mA	6 10-bit 2 0-10V 0-20mA, 4-20mA 4 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	2 (2 modes) Normal: 14-bit Fast: 12-bit 0-10V, 0-20mA 4-20mA	2 10-bit 0-10V 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	
Temperature Measurement		None	None	None	None	and as 2 PT100/TC	and as 2 PT100/TC	None	None	and as 2 PT100/TC	
Outputs											
Digital		6 relay	12 relay	8 relay	6 relay	8 relay	4 relay	12 pnp	16 pnp	10 pnp	
High-speed Outputs/PWM		2 npn (2 PTO) 200kHz max	None	4 npn (3 PTO) 200kHz max	2 npn (2 PTO) 200kHz max	None	4 npn (2 PTO) 200kHz max	7 0.5kHz	7 0.5kHz	5 0.5kHz	
Analog		None	None	None	None	2 12-bit 0-10V, 4-20mA	2 12-bit 0-10V, 4-20mA	None	None	2 12-bit 0-10V, 4-20mA	
I/O Expansion											
	Local or Remote I/Os may be added via expansion port or via CANbus										
Program											
Application Memory	Application Logic: 1MB • Images: 6MB • Fonts: 512K										
Scan Time	15µ sec per 1K of typical application										
Memory Operands	8192 coils, 4096 registers, 512 long integers (32-bit), 256 double words (32-bit unsigned), 64 floats, 384 timers (32-bit), 32 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words										
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K Flash data										
SD card (Micro)	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs										
Enhanced Features	Trends: graph any value and display on HMI • String Library: instantly switch HMI language										
Operator Panel											
Type & Colors	TFT LCD • 65,536 colors, 16-bit resolution • Brightness- Adjustable via touchscreen or software										
Display	Resolution: 320 x 240 pixels (QVGA) • Size: 3.5"										
Touchscreen	Resistive, Analog										
Keys	5 programmable keys. Labeling options- function keys, arrows, or customized										
General											
Power Supply	24VDC, except for V350-35-B1, which is 12/24VDC										
Battery	7 years typical at 77°F; battery back-up for all memory sections and RTC										
Environment	NEMA4X/IP65 (when panel mounted)										
Clock	Real-time clock functions (date and time)										

Vision130™ Graphic OPLC™

... Complex recipe, TCP/IP environment! better use Vision130™ ...



Vision130™ Series Featuring:

HMI

- 1024 user-designed screens and 400 images per application
- HMI graphs & Trends
- Text String Library—easy localization
- Troubleshoot via the HMI panel—no PC needed

PLC

- I/O options include high-speed, temperature and weight measurement
- Auto-tune PID, up to 24 independent loops
- Recipe programs and datalogging via Data Tables
- Micro SD card—log, backup, clone, and more
- Time-based control in 3 clicks

Communication

- GPRS/GSM/CDMA enabled
- Ethernet via TCP/IP
- Web server: Use built-in HTML pages, or design complex pages to view and edit PLC data via the Internet
- SMS messaging, Send e-mail function
- Remote Access utilities
- MODBUS protocol support
- CANbus: CANopen, UniCAN, J1939 & more
- DF1 Slave
- Ports: supplied with 1 RS232/RS485; 2 ports may be added: 1 Serial/Ethernet/Profibus and 1 CANbus



More power & speed in this palm-size PLC with built-in Graphic LCD display, keypad, & onboard I/Os (expandable up to 256)

Article Number	V130-33-B1	New! V130-33-TR20*	V130-33-R34	V130-33-TR34	New! V130-33-TR6*	V130-33-RA22	V130-33-TRA22	V130-33-T2	V130-33-T38	V130-33-TA24
	No onboard I/Os	10 Digital 2 D/A Inputs ¹ 6 Relay Outputs 2 High-speed Transistor Outputs	20 Digital 2 D/A Inputs ¹ 12 Relay Outputs	20 Digital 2 D/A Inputs ¹ 8 Relay 4 High speed Transistor Outputs	6 Digital, 2 D/A 4 Analog Inputs ¹ 6 Relay Outputs 2 High-speed Transistor Outputs	8 Digital 2 D/A, 2 PT100/TC/ Digital ¹ Inputs 8 Relay 2 Analog Outputs	8 Digital, 2 D/A 2 PT100/TC/ Digital ¹ Inputs 4 Relay, 2 Analog 4 High-speed Transistor Outputs	10 Digital 2 D/A Inputs ¹ 12 Transistor Outputs	20 Digital 2 D/A Inputs ¹ 16 Transistor Outputs	8 Digital 2 D/A, 2 PT100/ TC/Digital ¹ Inputs 10 Transistor 2 Analog Outputs
Inputs										
Digital pnp/npn		12	22	22	8	12	12	12	22	12
HSC/Shaft-Encoder/ Max. Freq. Measurer ^{2&3}		3 200kHz ⁴ 32-bit	3 30kHz 32-bit	3 200kHz ⁴ 32-bit	1 200kHz ⁴ 32-bit	1 30kHz 32-bit	1 200kHz ⁴ 32-bit	3 30kHz 32-bit	2 30kHz 32-bit	1 30kHz 32-bit
Analog	None	2 10-bit, 0-10V 0-20mA 4-20mA	2 10-bit, 0-10V 0-20mA 4-20mA	2 10-bit, 0-10V 0-20mA 4-20mA	6 10-bit 0-10V, 0-20mA 4-20mA and 4 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	2 (2 modes) Normal: 14-bit Fast: 12-bit 0-10V, 0-20mA 4-20mA and as 2 PT100/TC	2 10-bit 0-10V 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA and as 2 PT100/TC
Temperature Measurement		None	None	None	None	and as 2 PT100/TC	and as 2 PT100/TC	None	None	and as 2 PT100/TC
Outputs										
Digital		6 relay	12 relay	8 relay	6 relay	8 relay	4 relay	12 pnp	16 pnp	10 pnp
High-Speed Outputs/PWM		2 npn (2 PTO) 200kHz max	None	4 npn (3 PTO) 200kHz max	2 npn (2 PTO) 200kHz max	None	2 npn (2 PTO) 200kHz max	7 0.5kHz	7 0.5kHz	5 0.5kHz
Analog		None	None	None	None	2 12-bit 0-10V, 4-20mA	2 12-bit 0-10V, 4-20mA	None	None	2 12-bit 0-10V, 4-20mA
I/O Expansion	Local or Remote I/Os may be added via expansion port or via CANbus									
Program										
Application Memory	Application Logic: 512K • Images: 256K • Fonts: 128K									
Scan Time	20μ sec per 1K of typical application									
Memory Operands	4096 coils, 2048 registers, 256 long integers (32-bit), 64 double words (32-bit unsigned), 24 floats, 192 timers (32-bit), 24 counters Additional non-retainable operands: 1024 X-bits, 512 X-integers, 256 X-long integers, 64 X-double words									
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K Flash data									
SD Card (Micro)	Store datalogs, Alarm History, Data Tables, Trend data, export to Excel • Back up Ladder, HMI & OS, clone PLCs									
Enhanced Features	Trends: graph any value and display on HMI • Built-in Alarm management system • String Library: instantly switch HMI language									
Operator Panel										
Type	Graphic STN LCD, white LED backlight									
Display	Resolution: 128 x 64 pixels • Size: 2.4"									
Keys	20, including 10 user labeled keys (slide kit sold separately)									
General										
Power Supply	24VDC, except for V130-33-B1, which is 12/24VDC									
Battery	7 years typical at 77°F, battery back-up for all memory sections and RTC									
Environment	NEMA4X/IP65 (when panel mounted)									
Clock	Real-time clock functions (date and time)									

¹ In these models certain inputs are adaptable, and can function as either digital, analog, and in certain models also as thermocouple or PT100. Using adaptable inputs reduces the amount of free digital inputs. For example, V130-33-RA22 offers 12 digital inputs. Implementing 2 TC inputs requires 4 digital inputs, leaving 8 free.

² Certain inputs can function as high-speed counters, shaft-encoder inputs, or normal digital inputs.

³ This specification depends on cable length.

⁴ This specification depends upon driver type.

* V130-33-TR6 & V130-33-TR20 Not yet UL certified.

Vision™ Graphic/Touch OPLC™

... Powerful communication options make the Vision OPLCs™ the natural choice for distributed-control systems ...



Vision™ Series Featuring:

HMI

- Up to 255 user-designed screens
- Hundreds of images per application
- HMI graphs & Trends
- Virtual alpha-numeric keypad (in V290 & V530)
- Troubleshoot via the HMI panel — no PC needed

PLC

- I/O options include high-speed, temperature & weight measurement
- Auto-tune PID, up to 12 independent loops
- Recipe programs and datalogging via Data Tables
- Time-based control in 3 clicks

Communication

- Ethernet via TCP/IP
- SMS messaging
- GPRS/GSM/CDMA enabled
- Remote Access utilities
- MODBUS protocol support
- CANbus: CANopen, UniCAN, CANbus Layer 2
- Ports: supplied with 1 RS232, 1 RS232/RS485 and 1 CANbus; 1 port may be added for serial/Ethernet



Advanced PLCs with an integrated Operator Panel (graphic or touch), plus Snap-in & expansion I/Os (up to 316)



	Vision230™	Vision260™	Vision280™	Vision290™	Vision530™
I/O Options					
Snap-in I/O Modules	Plug these modules directly into the back of the Vision unit to create a self-contained PLC with up to 62 I/Os. Inputs may include Digital, Analog and Temperature Measurement. Outputs may include Transistor, Relay or Analog (sold separately)				
I/O Expansion	Local or remote I/Os may be added via expansion port or via CANbus				
Program					
Application Memory	1MB				
Scan Time	30µsec per 1K of typical application				
Operands	4096 coils, 2048 registers, 256 long integers (32 bit), 64 double words (32 bit unsigned), 24 memory floats, 192 timers, 24 counters				
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K Flash data				
Operator Panel					
Type	STN LCD	Negative blue, STN LCD	Black & White FSTN LCD		
Display Resolution & Size	128 x 64 pixels 3.2"	240 x 64 pixels 5.4"	320 x 240 pixels (QVGA), 4.7" active area	320 x 240 pixels (QVGA), 5.7" active area	
Touch Screen	None	None	Resistive, Analog		
Keyboard					
Number of Keys	24 user labeled keys	33 user labeled keys	27 user labeled keys	Virtual keyboard	
General					
Power Supply	12VDC or 24VDC				
Battery Back-up	7 years typical at 77°F; back-up for all memory sections and real-time clock (RTC)				
Environment	NEMA4X/IP65 (for panel, when mounted)				
Article Number	V230-13-B20B	V260-16-B20B	V280-18-B20B	V290-19-B20B	V530-53-B20B



Vision120™ Graphic OPLC™

... Palm-sized punch: power PLC plus graphic HMI ...



Vision120™ Series Featuring:

HMI

- Up to 255 user-designed screens
- Hundreds of images per application
- HMI graphs & Trends
- Troubleshoot via the HMI panel — no PC needed



Small-and-powerful PLC with built-in Graphic LCD display, keypad, & onboard I/O (expandable up to 256)

PLC

- I/O options include high-speed, temperature and weight measurement
- Auto-tune PID, up to 12 independent loops
- Recipe programs and datalogging via Data Tables
- Time-based control in 3 clicks

Communication

- GPRS/GSM/CDMA enabled
- SMS messaging
- Remote Access utilities
- MODBUS protocol support
- CANbus: CANopen, UniCAN, CANbus Layer 2
- 2 RS232/RS485 built-in ports



¹ In these models certain inputs are adaptable, and can function as either digital, analog, and in certain models also as thermocouple or PT100. Using adaptable inputs reduces the amount of free digital inputs. For example, V120-22-UA2 offers 12 digital inputs. Implementing 2 TC inputs requires 4 digital inputs, leaving 8 free.

² Certain inputs can function as high-speed counters, shaft-encoder inputs, or normal digital inputs.

³ This specification depends on cable length.

⁴ Certain outputs can function as high-speed or PWM outputs.

Article Number	V120-22-R1	V120-22-R2C	V120-22-R6C	V120-22-R34	V120-22-T1	V120-22-T38	V120-22-T2C	V120-22-UN2	V120-22-UA2	V120-22-RA22
	10 Digital 1 Analog Inputs 6 Relay Outputs	10 Digital 2 Analog Inputs 6 Relay Outputs	6 Digital 6 Analog Inputs 6 Relay Outputs	20 Digital 2 D/A ¹ Inputs 12 Relay Outputs	12 Digital Inputs 12 Transistor Outputs	22 Digital Inputs 16 Transistor Outputs	10 Digital 2 D/A ¹ Inputs 12 Transistor Outputs	10 Digital 2 D/A/PT100/TC ¹ Inputs 12 Transistor Outputs	10 Digital 2 D/A/TC ¹ Inputs 10 Transistor 2 Analog Outputs	8 Digital 2 D/A, 2 PT100/TC/Digital ¹ Inputs 8 Relay 2 Analog Outputs
Inputs										
Digital pnp/npn	10	10	6	22	12	22	12	12	12	12
HSC/Shaft-Encoder/ Max Freq. Measurer ²	3 10kHz 32-bit	3 10kHz 32-bit	1 10kHz 32-bit	3 30kHz ³ 32-bit	2 10kHz 32-bit	2 30kHz ³ 32-bit	3 10kHz 32-bit	2 10kHz 32-bit	2 30kHz ³ 32-bit	2 30kHz ³ 32-bit
Analog	1 10-bit 0-10V, 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	6 10-bit, 2 0-10V 0-20mA, 4-20mA and 4 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	None	None	2 10-bit 0-10V 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA
Temperature Measurement	None	None	None	None	None	None	None	2 PT100/TC	2 TC	and as 2 PT100/TC
Outputs										
Digital	6 relay	6 relay	6 relay	12 relay	12 pnp	16 pnp	12 pnp	12 pnp	10 pnp	8 relay
High-Speed Outputs/ PWM ⁴	None	None	None	None	2, first 2 outputs can function as HSO, 0.5kHz maximum					None
Analog	None	None	None	None	None	None	None	None	2 12-bit 0-10V, 4-20mA	2 12-bit: 0-10V, 4-20mA
I/O Expansions										
	Local or Remote I/Os may be added via expansion port or via CANbus									
Program										
Application Memory	448K (virtual) Ladder code capacity									
Memory Scan Time	48μ sec per 1K of typical application									
Operands	4096 coils, 2048 registers, 256 long integers (32-bit), 64 double words (32-bit unsigned), 24 floats, 192 timers (32-bit), 24 counters									
Data Tables	120K dynamic RAM data (recipe parameters, datalogs, etc.), up to 256K Flash data									
Operator Panel										
Type	Graphic STN LCD									
Display	Resolution: 128 x 64 pixels • Size: 2.4"									
Keypad										
Keys	16 keys									
General										
Power Supply	12/24VDC	12/24VDC	24VDC	24VDC	12/24VDC	24VDC	12/24VDC	12/24VDC	24VDC	24VDC
Battery	7 years typical at 77°F, battery back-up for all memory sections and RTC									
Environment	NEMA4X/IP65 (when panel mounted)									
Clock	Real-time clock functions (date and time)									

Jazz® Micro-OPLC™

... Replace that "smart-relay" with a real PLC/HMI ...



Jazz® series featuring:

HMI

- Up to 60 user-designed screens
- Multilingual: supports over 15 languages & 20 graphic symbols
- Scroll between pre-programmed recipes/menus

PLC

- Ladder Logic programming ensures functional flexibility
- Functions include: interrupt, loops, math, store & compare functions
- Time-based control in 3 clicks
- High-speed counters & PWM outputs
- Direct temperature inputs
- Auto-tune PID, up to 4 loops



Communication²

- SMS messaging via GSM
- Remote Access utilities
- PC access via MODBUS or OPC server
- MODBUS networking

Much more than a "smart relay". Full-function PLC and HMI, with up to 40 onboard I/Os, all in one device

Article Number	JZ10-11-R10	JZ10-11-T10	JZ10-11-R16	JZ10-11-T17	JZ10-11-R31	JZ10-11-T40	JZ10-11-UN20	JZ10-11-UA24	JZ10-11-PT15
	6 Digital Inputs 4 Relay Outputs	6 Digital Inputs 4 Transistor Outputs	6 Digital, 2 D/A 2 Analog Inputs¹ 6 Relay Outputs	6 Digital, 2 D/A 2 Analog Inputs¹ 7 Transistor Outputs	16 Digital, 2 D/A 2 Analog Inputs¹ 11 Relay Outputs	16 Digital 2 D/A, 2 Analog Inputs¹ 20 Transistor Outputs	9 Digital, 2 D/A 1 Analog 1 PT100/TC Inputs¹ 5 Relay 2 Transistor Outputs	9 Digital, 2 D/A 2 Analog, 2 PT100/TC Inputs¹ 5 Relay, 2 Analog 2 Transistor Outputs	3 Digital, 3 D/A 3 PT1000/Ni1000 Inputs¹ 5 Relay 1 Transistor Outputs
Inputs									
Digital pnp/npn	6	6	8	8	18	18	11	11	6
High-Speed Counters³	2 5kHz, 16-bit						1 5kHz, 16-bit		
Analog	None	None	2 10-bit, 0-10V and 2 10-bit, 0-20mA, 4-20mA	2 10-bit, 0-10V and 2 10-bit 0-20mA, 4-20mA	2 10-bit, 0-10V and 2 10-bit 0-20mA, 4-20mA	2 10-bit, 0-10V and 2 10-bit 0-20mA, 4-20mA	2 10-bit, 0-10V and 1 10-bit 0-20mA, 4-20mA	2 10-bit, 0-10V and 2 10-bit 0-20mA, 4-20mA	3 10-bit 0-10V
Temperature Measurement	None	None	None	None	None	None	1 PT100/TC	2 PT100/TC	3 PT1000/Ni1000
Outputs									
Digital	4 relay	4 pnp	6 relay	7 pnp	11 relay	20 pnp	5 relay, 2 pnp	5 relay, 2 pnp	5 relay 1 pnp/npn
High-Speed Outputs/ PWM	None	2 PWM	None	2 PWM	None	2 PWM	2 PWM	2 PWM	1 HSO
Analog	None	None	None	None	None	None	None	2 12-bit +/- 10V, 4-20mA	None
Program									
Ladder Code Memory	24K (virtual)								
Memory Operands	256 coils, 256 registers, 64 timers								
Operator Panel									
Type	STN LCD								
Display Size	2 lines x 16 characters								
Keypad									
Keys	16 keys, 10 of which are user-labeled								
General									
Power Supply	24VDC								
Battery	10 years typical at 77°F, battery back-up for RTC and system data, including variable data								
Environment	NEMA4X/IP65 (when panel mounted)								
Clock	Real-time clock functions (date and time)								



¹ These models comprise a total of 10/20 inputs (model-dependent). 6/16 (model-dependent) of these may be wired, in a group, as either digital npn or pnp. 2 inputs have added functionality. Both may be wired in a group as npn, pnp, or analog (voltage) inputs. Note that it is also possible to individually wire 1 input as a pnp input, and the other as an analog input. The two remaining inputs are analog (current).

² In order to download applications and enable communications, install Jazz® with the appropriate Add-on Module.

³ Certain inputs can function as high-speed counters, or as normal digital inputs.

Add-on modules² and accessories

Programming kit	COM Port kit	Program Cloner module	Keypad Slide kit
Programming Add-on port (isolated) + software CD Article No.: JZ-PRG	RS232/RS485 Add-on port (isolated) Article No.: JZ-RS4	Copy applications from PLC to PLC Article No.: MJ20-MEM1	Customize the Jazz keypad to your application Article No.: MJ20-JZ-SL1

M91 Micro-OPLC™

... Use the perfect PLC for small applications— and skip panel wiring ...



M91 Series Featuring:

- HMI**
 - Up to 80 user-designed screens
 - Multilingual: supports over 15 languages and 20 graphic symbols
 - Scroll between pre-programmed recipes/menus
 - Info Mode—troubleshoot via the HMI panel

- PLC**
 - Shaft-encoder inputs and PWM outputs
 - Direct temperature inputs
 - Auto-tune PID, up to 4 loops
 - Time-based control in 3 clicks
 - Database
 - Print utilities
 - Full source upload



- Communication**
 - SMS messaging via GSM
 - Remote access utilities
 - PC access via MODBUS or OPC server
 - MODBUS networking
 - CANbus
 - RS232/RS485 built-in port

Palm-size PLC + textual HMI and up to 38 onboard I/Os (expandable up to 150)

Article Number	M91-2-R1	M91-2-R2C	M91-2-R6C	M91-2-R34	M91-2-T1	M91-2-T38	M91-2-T2C	M91-2-UN2	M91-2-UA2	M91-2-RA22
	10 Digital 1 Analog Inputs 6 Relay Outputs	10 Digital 2 Analog Inputs 6 Relay Outputs	6 Digital 6 Analog Inputs 6 Relay Outputs	20 Digital 2 D/A ¹ Inputs 12 Relay Outputs	12 Digital Inputs 12 Transistor Outputs	22 Digital Inputs 16 Transistor Outputs	10 Digital 2 D/A ¹ Inputs 12 Transistor Outputs	10 Digital 2 D/A/PT100/TC ¹ Inputs 12 Transistor Outputs	10 Digital 2 D/A/TC ¹ Inputs 10 Transistor 2 Analog Outputs	8 Digital, 2 D/A 2 PT100/TC/ Digital ¹ Inputs 8 Relay 2 Analog Outputs
Inputs										
Digital pnp/npn	10	10	6	22	12	22	12	12	12	12
HSC/Shaft-Encoder/ Max. Freq. Measurer ²	3 10kHz 16-bit	3 10kHz 16-bit	1 10kHz 16-bit	3 30kHz ³ 16-bit	2 10kHz 16-bit	2 30kHz ³ 16-bit	3 10kHz 16-bit	2 10kHz 16-bit	1 30kHz ³ 16-bit	1 30kHz ³ 16-bit
Analog	1 10-bit 0-10V, 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	6 10-bit 2 0-10V 0-20mA, 4-20mA and 4 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	None	None	2 10-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA	2 14-bit 0-10V, 0-20mA 4-20mA
Temperature Measurement	None	None	None	None	None	None	None	2 PT100/TC	2 TC	and as 2 PT100/TC
Outputs										
Digital	6 relay	6 relay	6 relay	12 relay	12 pnp	16 pnp	12 pnp	12 pnp	10 pnp	8 relay
High-Speed Outputs/ PWM ⁴	None	None	None	None	2, first 2 outputs can function as HSO, 0.5kHz maximum					None
Analog	None	None	None	None	None	None	None	None	2 12-bit: 0-10V, 4-20mA	2 12-bit: 0-10V, 4-20mA
I/O Expansion										
	I/Os may be added via expansion port									
Program										
Application Memory	36K (virtual) Ladder code capacity									
Memory Operands	256 coils, 256 registers, 64 timers									
Database	1024 integers, (indirect access)									
Operator Panel										
Type	STN LCD									
Display Size	2 lines x 16 characters									
Keypad										
Keys	15 keys									
General										
Power Supply	12/24VDC	12/24VDC	24VDC	24VDC	12/24VDC	24VDC	12/24VDC	12/24VDC	24VDC	24VDC
Battery	7 years typical at 77°F, battery back-up for all memory sections and RTC									
Environment	NEMA4X/IP65 (when panel mounted)									
Clock (RTC)	Real-time clock functions (date and time)									

¹ In these models certain inputs are adaptable, and can function as either digital, analog, and in certain models also as thermocouple or PT100. Using adaptable inputs reduces the amount of free digital inputs. For example, M91-2-UA2 offers 12 digital inputs. Implementing 2 TC inputs requires 4 digital inputs, leaving 8 free.

² Certain inputs can function as high-speed counters, shaft-encoder or normal digital inputs.
³ This specification depends on cable length.
⁴ Certain outputs can function as high-speed or PWM inputs.
* Additional models (M90 models) are listed on the Unitronics web site.

I/O Expansion Modules

Expand your system with local or remote I/O expansion modules¹. Vision series support both local & remote I/O modules. M90/M91² support local modules only.

Digital Modules

IO-DI8-TO8	IO-DI8-RO4	IO-DI8-RO8	EX90-DI8-RO8 ³	IO-DI16
24VDC 8 Digital Inputs, pnp/npn, including one High-speed Counter 8 pnp Transistor Outputs	24VDC 8 Digital Inputs, pnp/npn, including one High-speed Counter 4 Relay Outputs	24VDC 8 Digital Inputs, pnp/npn, including one High-speed Counter 8 Relay Outputs	24VDC 8 Digital Inputs, pnp, including one High-speed Counter 8 Relay Outputs	24VDC 16 Digital Inputs, pnp/npn, including one High-speed Counter
IO-TO16	IO-RO8	IO-RO16	IO-DI8ACH	
24VDC 16 pnp Transistor Outputs	24VDC (power supply) 8 Relay Outputs	24VDC (power supply) 16 Relay Outputs	110/220 VAC 8 AC Inputs	



Analog, Temperature and Weight/Strain Measurements

IO-AI4-AO2	IO-PT400	IO-PT4K	
24VDC (power supply) 4 Analog Inputs 12-bit, 0-10V, 0-20mA, 4-20mA, 2 Analog Outputs, 12-bit + sign, ± 10V, 0-20mA, 4-20mA	4 PT100/NI100/NI120 Inputs Range PT100: -58°F ÷ 860°F (-50°C ÷ 460°C) Range NI100: -58°F ÷ 449°F (-50°C ÷ 232°C) Range NI120: -58°F ÷ 341°F (-50°C ÷ 172°C) 12-bit	4 PT1000/NI1000 Inputs Range PT1000: -58°F ÷ 860°F (-50°C ÷ 460°C) Range NI1000: -58°F ÷ 449°F (-50°C ÷ 232°C) 12-bit	
IO-AO6X	IO-LC1 ⁴	IO-LC3 ⁴	IO-ATC8
24VDC (power supply) 6 Isolated Analog Outputs 0-10V, 0-20mA, 4-20mA 12-bit	12/24VDC (Power Supply) 1-3 Loadcell / Strain gauge Inputs Input voltage ranges: ± 20mV, ± 80mV Excitation: AC/DC 1 Digital pnp Input 2 pnp Outputs Not supported by all OPLCs™		8 Thermocouple/ Analog Inputs T/C J, K, T, B, E, N, R, S, 0.1° Resolution, 0-10V, 0-20mA, 4-20mA, 12/14-bit

I/O Expansion Module Adapters

EX-A2X ¹
Local I/O module adapter. Galvanic isolation. Up to 8 modules may be connected to a single PLC ¹ . Supports both 12/24 VDC
EX-RC1 ⁵
Remote I/O module adapter, via CANbus. Multiple adapters may be connected to a single PLC, with up to 8 modules to each adapter ¹ . Supports both 12/24 VDC.

¹ Number of I/Os may vary according to module
² Except for M90-19-B1A
³ The EX90 is housed in an open casing. Only one EX90 can be connected per PLC, as a single expansion module; Expansion adapter not required.
⁴ IO-LCx models are supported by the M91 & Vision series. Not supported by the M90 series.
⁵ EX-RC1 is supported by Vision series. Not supported by M91 series.
⁶ Not yet UL certified.
* Additional 12VDC models are listed on Unitronics web site.

XL Digital/Analog Modules

IO-D16A3-RO16	IO-D16A3-TO16	EX-D16A3-RO8	EX-D16A3-TO16
24VDC, 16 Digital Inputs pnp/npn, including two High-speed Counters, 3 Analog Inputs, 10-bit, 0-20mA, 4-20mA, 16 Relay Outputs	24VDC, 16 Digital Inputs pnp/npn, including one High-speed Counter, 3 Analog Inputs, 10-bit, 0-20mA, 4-20mA, 15 pnp + 1 pnp/npn Transistor Outputs including 1 HSO	24VDC, built-in Expansion Module Adapter, 16 Digital Inputs, pnp/npn, including two High-speed Counters, 3 Analog Inputs 10-bit, 0-20mA, 4-20mA, 8 Relay Outputs	24VDC, built-in Expansion Module Adapter, 16 Digital Inputs, pnp/npn, including one High-speed Counter, 3 Analog Inputs 10-bit, 0-20mA, 4-20mA, 15 pnp + 1 pnp/npn Transistor Outputs including 1 HSO

Snap-in I/O Modules



Plug a Snap-in module directly into the back of a Vision PLC. Compatible with all V200, V500, V1040 and V1210 Vision series models.

Article No.	V200-18-E1B	V200-18-E2B	V200-18-E3XB	V200-18-E4XB	V200-18-E5B	V200-18-E6B ¹	V200-18-E62B ¹
Digital Inputs (isolated)	16 npn/pnp (including 2 Shaft-encoder inputs)	16 npn/pnp (including 2 Shaft-encoder inputs)	18 npn/pnp (including 2 Shaft-encoder inputs)	18 npn/pnp (including 2 Shaft-encoder inputs)	18 npn/pnp (including 2 Shaft-encoder inputs)	18 npn/pnp (including 2 Shaft-encoder inputs)	30 npn/pnp (including 2 Shaft-encoder inputs)
Analog Inputs	3 10-bit 0-10V, 0-20mA 4-20mA	2 10-bit 0-10V, 0-20mA 4-20mA	4 isolated 12-14-bit (software dependent) 0-10V, 0-20mA 4-20mA and/or 4 TC/PT100	4 isolated 12-14-bit (software dependent) 0-10V, 0-20mA 4-20mA and/or 4 TC/PT100	3 10-bit 0-10V, 0-20mA 4-20mA	3 10-bit 0-10V, 0-20mA 4-20mA & 2 14-bit 0-10V, 0-20mA 4-20mA and/or 2 TC/PT100	2 10-bit 0-10V, 0-20mA 4-20mA
Temperature Measurement	None	None	4 TC/PT100	4 TC/PT100	None	2 TC/PT100	None
Digital Outputs (isolated)	4 npn/pnp (including 2 High-speed outputs)	4 npn/pnp (including 2 High-speed outputs)	2 npn/pnp High-speed	17 npn/pnp (including 2 High-speed)	15 npn, 2 npn/pnp (including 2 High-speed)	2 npn/pnp High-speed	28 npn 2 npn/pnp High-speed
Relay Outputs (isolated)	10	10	15	None	None	15	None
Analog Outputs	None	2 12-bit 0-10V, 0-20mA 4-20mA	4 12-bit 0-10V, 0-20mA isolated	4 12-bit 0-10V, 4-20mA isolated	None	2 12-bit 0-10V, 4-20mA isolated	None

¹ V200-18-E6B, V200-18-E62B are not yet UL certified

Additional COM Module

Use these modules to enhance Vision's communication capabilities¹

Ethernet	RS232/RS485	Isolated RS232/RS485	CANbus	Profibus
V100-17-ET2 (for V130 and V350 series) V200-19-ET1 (for V200, V500, V1040 and V1210 series)	V100-17-RS4 (for V130 and V350 series) V200-19-RS4 (for V200, V500, V1040 and V1210 series)	V100-17-RS4X (for V130 and V350 series) V200-19-RS4-X (for V200, V500, V1040 and V1210 series)	V100-17-CAN (for V130 and V350 series)	V100-17-PB1 (for V130 and V350 series)

¹ V200/V500/V1040/V1210: 1 optional port for serial or Ethernet
V130/V350: 1 optional port for serial or Ethernet & 1 optional port for CANbus




GSM-KIT-41J
Kit Including Enfora GSM1308 Q. Band Modem

A single, Integrated Programming Environment - Free of charge!





Easy Hardware Configuration

- Select base PLC
- Configure I/Os




PLC Editor

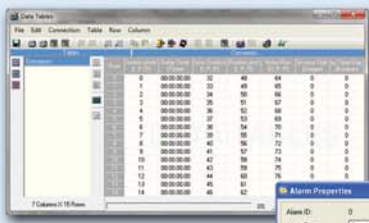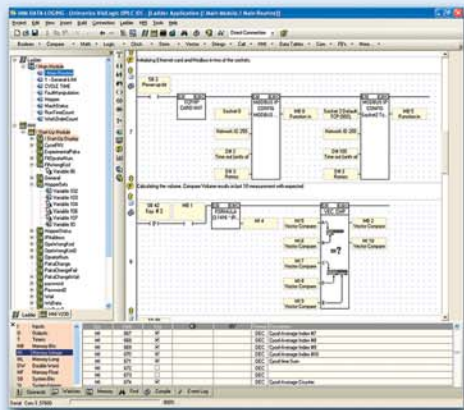


Data Tables: Recipe Control

- Click & Drop Ladder elements
- Modular program function: create & call subroutines
- Built-in function blocks save time & simplify tasks

Built-in Alarms

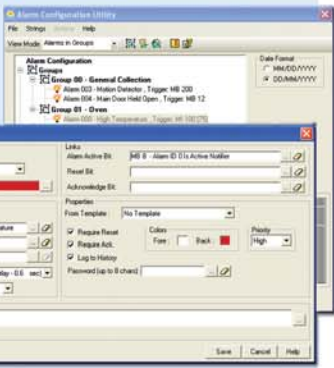


Intuitive HMI Design

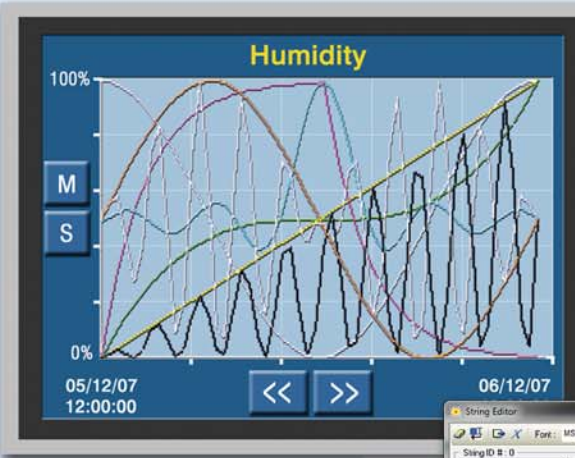

Free Image Library

- Assign functions to HMI keys
- Create & conditionally display operator messages
- Assign "Touch" properties to any screen element
- Use color images & graphs to reflect variable values & Trends

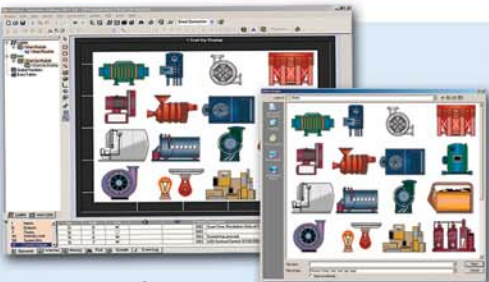


String Library: instantly switch HMI language

Software Utilities: Added Value - Free of charge!

Remote Access & Operator:

- PC to PLC access/control via modem or network
- Simultaneously view multiple operator panels

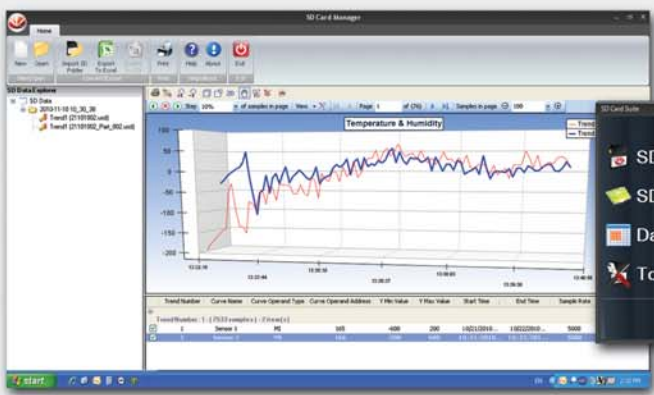

SD Card Suite:

- Manage data: Trends, Alarms, Data Tables
- Remotely read/write data to SD Card

DataXport:

- Log run-time/stored Data Table data
- Export data to Excel



UniOPC/UniDDE Server: Communicate with SCADA/Windows applications

UniDownload Manager: Simultaneously download different programs to many PLCs

UniVision Licensing: Protect your Intellectual Property

ActiveX & .NET communication driver: Easily implement communication between PLC & PC applications



Free Technical Support

- When you call Unitronics Technical Support, you speak to an actual Support Team expert
- When you email support@unitronics.com, you correspond with Support Team experts
- When you visit <http://forum.unitronics.com>, you get answers from community experts as well as Unitronics' in-house experts

The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the foregoing from the market. All information in this document is provided "as is" without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement. Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information. The trademarks, trade names, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R)G Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them.

NEW ENGLAND

MA, NH, ME, VT, RI, CT,
Forbes Engineering Sales, Inc.
Tel: 978-777-9100
Fax: 978-777-0002
info@forbesengineering.com
www.forbesengineering.com

MID ATLANTIC

Eastern PA, Southern NJ,
Delaware, Maryland,
North Virginia, DC
Providence Marketing Associates
Tel: 610-935-3300
Fax: 610-935-3387
sales@pmarep.com
www.pmarep.com

New York, Northern NJ
Parmaco LLC
Tel: 860-573-7118
Fax: 860-371-2481
chetti@tiac.net
www.parmacollc.com

SOUTH

Arkansas, Mississippi, Louisiana
Western Tennessee
Controls & Power
Tel: 501-327-4702, Fax: 501-327-4702
kennethfairless@sbcglobal.net

Eastern Tennessee, Georgia,
Alabama, Florida
Automation Support Group
Tel: 770-486-6575, Fax: 404-420-2557
jwindau@AutomationSupportGroup.com
www.automationsupportgroup.com

Southern Virginia, North Carolina,
South Carolina
Automation Support Group
Tel: 252-321-0606, Fax: 919-882-9875
jmeek@AutomationSupportGroup.com
www.automationsupportgroup.com

Western PA, West Virginia
Russell F. Clark
Tel: 412-635-9500, Fax: 412-635-9505
Gary@rfclark.com, www.rfclark.com

MIDWEST

Iowa, Nebraska
LAPP Controls
Phone: 319-540-0777
Fax: 319-373-8874
larry.philipp@gmail.com

Michigan
Automation Equipment, Inc.
Tel: 248-568-2833
MMalcoun@AutoEquipInc.com
www.AutoEquipInc.com

Northern Illinois, Indiana
Kelburn Engineering Co.
Tel: 630-832-8383
Fax: 630-832-8515
sales@kelburn.net
www.kelburn.net

Southern Illinois,
Missouri, Kansas
Hi Tech Electric
Tel: 636-451-2765
Fax: 636-451-2765
bmckerracher@swbell.net
www.hitechelectric.net

Ohio & Kentucky
Pulsar Controls
Tel: 216-834-0038
Fax: 216-834-0039
dominic@pulsar-controls.com
www.pulsar-controls.com

Wisconsin, Minnesota,
North & South Dakota
Electrical Solutions Plus, Inc.
Tel: 414-321-8509
Fax: 414-321-8609
gary@esplus-inc.com
www.esplus-inc.com

WEST

Arizona, New Mexico
Western States Controls Group
Tel: 602-393-3045, Fax: 602-393-3046
sales@iwestco.com, www.iwestco.com

Colorado, Wyoming, Eastern Montana
Western States Controls Group
Tel: 303-232-4996, Fax: 303-233-5741
sales@iwestco.com, www.iwestco.com

Northern California
Western States Controls Group
Tel: 925-370-1500, Fax: 925-370-0848
sales@iwestco.com, www.iwestco.com

Oregon, Washinton,
Northern Idaho, Western Montana
Globale, Inc.
Tel: 503-590-2325
TFinstad@Globalepmr.com
www.globalepmr.com

Utah, Nevada, Southern Idaho
Western States Controls Group
Tel: 801-521-8045
Fax: 801-521-8043
sales@iwestco.com
www.iwestco.com

Southern California
Western States Controls Group
Tel: 949-559-1941
Fax: 949-653-2420
sales@iwestco.com
www.iwestco.com

Texas, Oklahoma
MD&G + Controls
Tel: 817-307-1274
sales@mdgcontrols.com
www.mdgcontrols.com

Local Reps & Distributors

520602470 - USA - 2011



www.unitronics.com

Unitronics, Inc.
1 Batterymarch Park, Quincy, MA 02169
Toll free: 866-666-6033
Tel: 617-657-6596
Fax: 617-657-6598
usa.sales@unitronics.com

International Headquarters:
P.O.B. 300, Ben Gurion Airport 70100, Israel
Tel: +972 3 977 88 88
Fax: +972 3 977 88 77
export@unitronics.com